



惠州市德立电子有限公司

HUI ZHOU DE LI ELECTRONICS CO., LTD

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND TYPE COMMON MODE FILTER	PAGE NO:	PAGE 1 OF 6
PART NO:	WBA0805D系列	SN.	
CUSTOMER NO:		DATE:	2020年12月18日

CATALOG

Resume	P2
Shape & Dimension	P3
Characteristic	P4
General specification	P4
Soldering Conditions	P5
Package Information	P6
Reliabilty Test	P7-8
Electrical Characteristic Curve	P9




惠州市德立电子有限公司
HUI ZHOU DE LI ELECTRONICS CO., LTD

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND TYPE COMMON MODE FILTER	PAGE NO:	PAGE 3 OF 6
PART NO:	WBA0805D系列	SN.	
CUSTOMER NO:		DATE:	2020年12月18日

1. SHAPE & DIMENSION

UNIT:mm

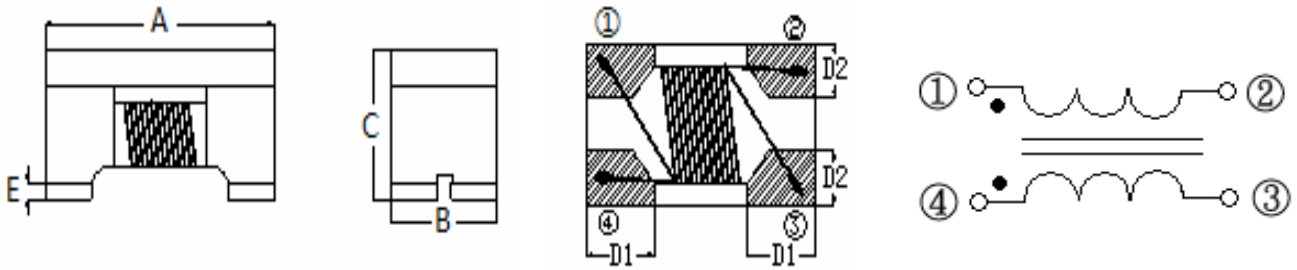

CODE	A	B	C	D1	D2	E
DIMENSION	2.0±0.2	1.2±0.2	1.2±0.2	0.55±0.1	0.45±0.1	0.15±0.1

2. PART NUMBERING SYSTEM

WBA □□□□ □ □□□ □ □ — □□
1 2 3 4 5 6 7

- PRODUCT SYMBOL (产品代号)
- DIMENSIONS (规格尺寸)
- MATERIAL CODE (材料代号)
- IMPEDANCE (阻抗)
- TOLERANCE (公差) : P±25%; N±30%
- PACKAGING (包装方式) : T-编带盘装; B-散装
- E.P. (环保) : LF—Lead Free HF—Halogen Free FP—Red Phosphor Free

3. GENERAL SPECIFICATION

a. Storage temp.: -10°C~+40°C, R.H.: 30% ~ 70%, Operating temp.: -40°C ~ +125°C.

APPROVED BY	CHECKED BY	DRAFT
陈启善	曹春宁	余运鸿



惠州市德立电子有限公司

HUI ZHOU DE LI ELECTRONICS CO., LTD

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND TYPE COMMON MODE FILTER	PAGE NO:	PAGE 4 OF 6
PART NO:	WBA0805D系列	SN:	
CUSTOMER NO:		DATE:	2020年12月18日

4. TEST DATA FOR SAMPLES

NO.	Part Number	Z	Freq	Rdc	Idc	Rated Voltge	Insulation Resistance
		(Ω)	(MHz)	(Ω)Max	(mA)Max	Volts	(MΩ) Min
1	WBA0805D670PT-HF	67	100	0.25	400	50	10
2	WBA0805D900PT-G4-HF	90	100	0.3	400	50	10
3	WBA0805D121PT-HF	120	100	0.3	370	50	10
4	WBA0805D161PT-HF	160	100	0.35	330	50	10
5	WBA0805D181PT-HF	180	100	0.35	330	50	10
6	WBA0805D201PT-HF	200	100	0.4	300	50	10
7	WBA0805D221PT-HF	220	100	0.4	300	50	10
8	WBA0805D261PT-HF	260	100	0.4	300	50	10
9	WBA0805D361PT-G-HF	360	100	0.45	280	50	10
10	WBA0805D601PT-HF	600	100	0.6	220	50	10
11	WBA0805D801PT-HF	800	100	0.88	300	50	10
12	WBA0805D102PT-HF	1000	100	1.3	150	50	10
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							

APPROVED BY	CHECKED BY	DRAFT
陈启善	曹春宁	余运鸿




惠州市德立电子有限公司
HUI ZHOU DE LI ELECTRONICS CO., LTD

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND TYPE COMMON MODE FILTER	PAGE NO:	PAGE 5 OF 6
PART NO:	WBA0805D系列	SN:	
CUSTOMER NO:		DATE:	2020年12月18日

5. SOLDERING CONDITIONS


**Figure 1.
Re-flow
Soldering (Lead
Free)**

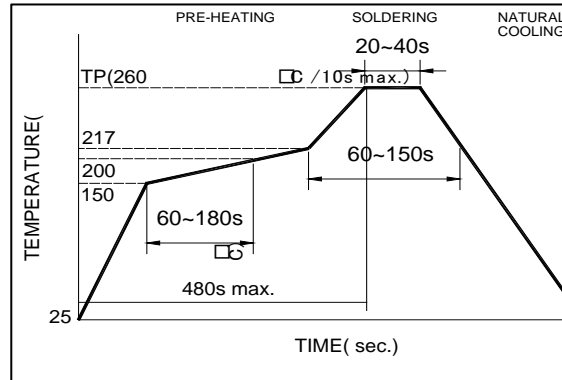

Note:

- Preheat circuit and products to 150°C
- 260°C tip temperature (max)
- Reflow times: no more than 2 times
- Solder paste thickness: the best 0.08mm is ,but max is 0.1mm


**Figure 2.
Wave Soldering**

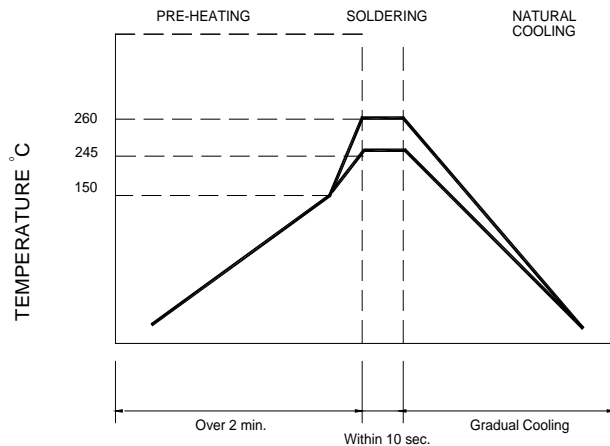

Note :

- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (max)

**Figure 3.
Hand Soldering**

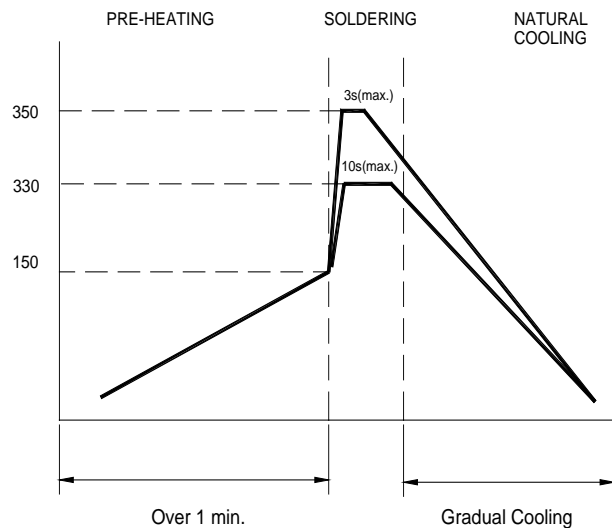

Note:

- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 3 sec.

APPROVED BY	CHECKED BY	DRAWN BY
陈启善	曹春宁	余运鸿




惠州市德立电子有限公司
HUI ZHOU DE LI ELECTRONICS CO., LTD

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND TYPE COMMON MODE	PAGE NO:	PAGE 6 OF 6
PART NO:	WBA0805D系列	SN.	
CUSTOMER NO:		DATE:	2020年12月18日

6. PACKAGING(unit: mm)

Type	0805				
Quantity	2000				


TAPING DRAWINGS

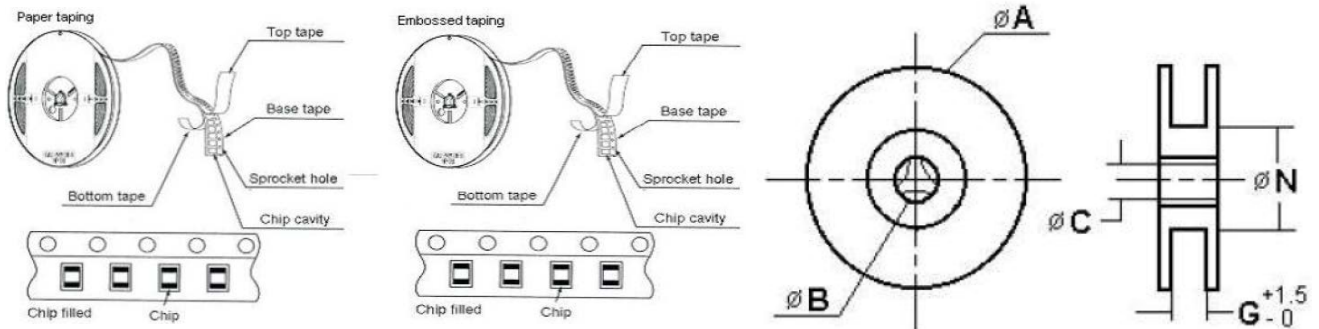


REEL DIMENSIONS(UNIT:mm)

	A	B	C	N	G
CF-8	178±2.0	22±2.0	12.5±1.5	57±2.0	8
CF-12	178±2.0	22±2.0	12.5±1.5	98±2.0	12

LEADER AND BLANK PORTION

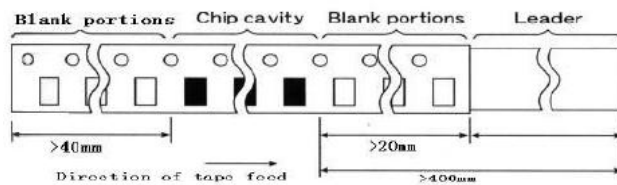

PEELLING OFF FORCE:0.05 to 0.7N in the direction show below.

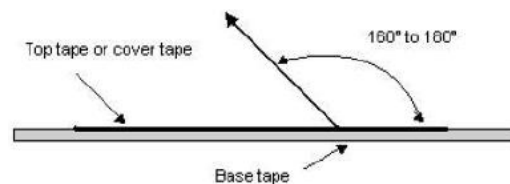

APPROVED BY	CHECKED BY	DRAFT
陈启善	曹春宁	余运鸿

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [DDY](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)