



Rating: 0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

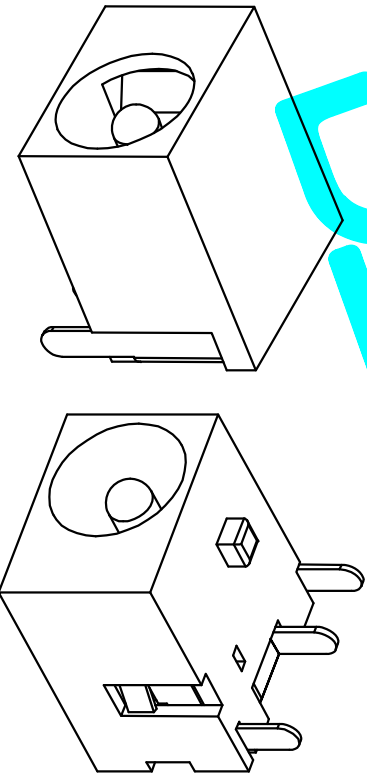

PIN	ø165	ø200	ø250
APPD.			



SCHEMATIC

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
①	HOUSING	1	PBT	
②	SPRING PIECE	1	SUS301	Ag-Plating
③	CURVER PIECE	1	BRASS	Ag-Plating
④	CONTACT FOOT	1	H59 BRASS	Ni-Plating

APPROVALS	DATE
DRAWN G.M.Chen	2018/3/15
CHECKED	
APPROVALS	

TITILE: DC JACK
 DEMON ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS	DATE	PART NO.	SCALE:	SHEET
DRAWN G.M.Chen	2018/3/15	DC-DD044-XXXX	1:1	1 OF 1
CHECKED				
APPROVALS				
TOLERANCES ARE	30±0.15	±0.30	ANGLE	
	10±0.30	±0.20		
	5±0.10	±0.15	±2°	
	~5	±0.10		
			DRAWING NO.	PROJ.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Connectors](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[B04P-VL-VN-1.8](#) [1600206-1](#) [163-0308-EX](#) [163-4012-EX](#) [163-4117-EX](#) [163-7421](#) [163-MJ22-EX](#) [171-0721-EX](#) [KLDX-SMT-0202-BPTR](#)
[163-0179-EX](#) [163-1000-EX](#) [163-4007-EX](#) [163-4015-EX](#) [171-0722-E](#) [171-7391](#) [K596](#) [KLD-0201-BC](#) [KPPX-D](#) [4C6831AX](#) [TS3PNJ](#)
[E16550-0008](#) [VLP-08V-1](#) [VLP-12V-1](#) [VLS-01V](#) [DC PLUG-P1M-P1MR](#) [09442](#) [AS120-M](#) [09760](#) [CP30240](#) [TAMIYA-M](#) [TAMIYA-MT1](#)
[TAMIYA-MT2](#) [4840.1200](#) [4840.2202](#) [C5080HI-04P-18 + C5080HI-C](#) [JC-138](#) [JC-210](#) [JPO-25 \(FC6814\)](#) [JYO-26 \(FC6811\)](#) [JYO-29](#)
[\(FC68102\)](#) [KLB 3](#) [KLBM 3](#) [KLBPS 3](#) [KLS 10 SCHWARZ](#) [KLS 40 SCHWARZ](#) [KPJXHT-4S](#) [DC-10A FC68148](#) [DC-10B \(FC68149\)](#)
[WKLS 2](#) [WKLS 40](#) [FA67555](#)