

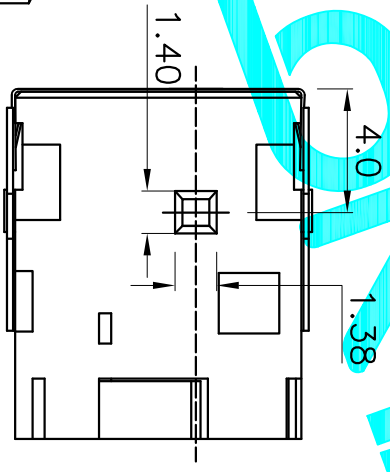


Rating: 0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

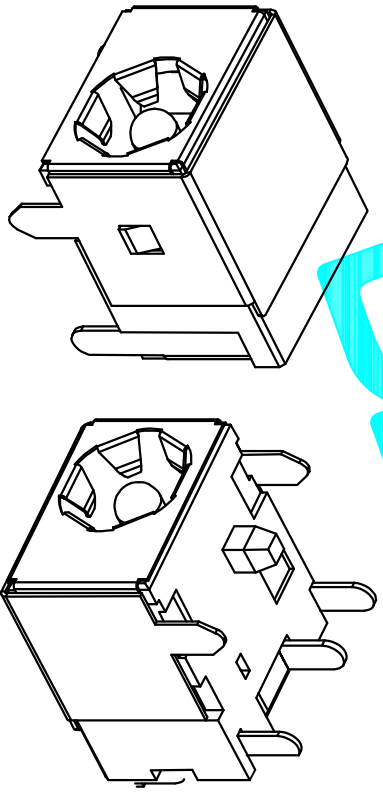

PIN	①	②	③
APPD.	∅1.65	∅2.0	∅2.5



SCHEMATIC

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
⑦	COVER	1	SUS301	Ni-Plating
⑥	CONTACT FOOT	1	BRONZE	Ag-Plating
⑤	PIN	1	H59 BRASS	Ni-Plating
④	CONTACT FOOT	1	BRASS	Ag-Plating
③	CURVER PIECE	1	BRASS	Ag-Plating
②	SPRING PIECE	1	SUS301	Ag-Plating
①	HOUSING	1	PA9T	

APPROVALS	DATE
DRAWN G.M.Chen	2018/3/15
CHECKED	
APPROVALS	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30 ^{±0.1}	±0.30	ANGLE	PART NO.	SCALE:	SHEET
	A		NEW				10 ^{±0.10}	±0.20	±2°		DC-DD044A-XXX	1:1	1 OF 1
							5 ^{±0.10}	±0.15					PROJ.

P.C.B LAYOUT
TOP VIEW

DEALON 德之隆
ELECTRONICS CO.,LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Connectors](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[1600206-1](#) [163-0308-EX](#) [163-4012-EX](#) [163-4117-EX](#) [171-0721-EX](#) [KLDX-SMT-0202-BPTR](#) [163-1000-EX](#) [163-4007-EX](#) [163-4015-EX](#)
[171-0722-E](#) [171-7391](#) [K596](#) [KLD-0201-BC](#) [4C6831AX](#) [TS3PNJ](#) [E16550-0008](#) [DC PLUG-P1J-P1MR](#) [DC PLUG-P1M-P1MR](#) [09441](#)
[AS120-F](#) [09442](#) [AS120-M](#) [09759](#) [09760](#) [CP30240](#) [TAMIYA-M](#) [TAMIYA-MT2](#) [4840.1200](#) [4840.2202](#) [JC-135](#) [JC-138](#) [JC-210](#) [JC-214](#)
[JPO-25 \(FC6814\)](#) [JYO-26 \(FC6811\)](#) [JYO-29 \(FC68102\)](#) [KLB 3](#) [KLBM 3](#) [KLBPS 3](#) [KLBR 4](#) [KLS 10 SCHWARZ](#) [KPJXHT-4S](#) [DC-10A](#)
[FC68148](#) [DC-10B \(FC68149\)](#) [WKLS 2](#) [FA67555](#) [XNES/J 250 SCHWARZ](#) [FC68122C](#) [FC68124](#) [FC68125](#) [FC68129](#) [FC681375VH](#)