


Technical Data  
 Material:  
 Contact material:Brass  
 Plating:Gold Flash  
 Insulator material:Black polyester UL94V-0  
 Standard:PBT+30%G.F

Electrical:  
 Current rating:3Amps/contact max.  
 Contact resistance: $\leq 20m\Omega$ /contact  
 Insulation resistance: $\geq 1000M\Omega$  at V=100V  
 Withstanding voltage:550V AC/minute

Mechanical:  
 Soldering temperature: $+220^{\circ}C$ , 4s max  
 UNSPECIFIED TOLERANCE:  $\pm 0.20$

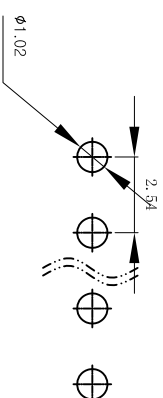

PCB Layout

A=2.54\*nP+0.40±0.35  
 B=2.54\*nP-2.54±0.20  
 Pin Number=1~40

APPROVALS		DATE	DRAWING NO.	
DRAWN	G.M.Chen	2015/7/17	DW254R-11-XX-85	
CHECKED			CONNECTOR	
APPROVALS			PART NO.	
			UNIT: mm	SCALE: 1:1
			DRAWING NO.	SHEET 1 OF 1
				PROJ.
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	
			CHANGE.	
			CHECK.	
			APPRO.	
TOLERANCES ARE				
		30 <sup>±0.15</sup>	±0.30	ANGLE
		10 <sup>±0.10</sup>	±0.20	
		5 <sup>±0.10</sup>	±0.15	±2°
		~ 5	±0.10	

**DEALON 德之隆**  
 ELECTRONICS CO.,LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)