
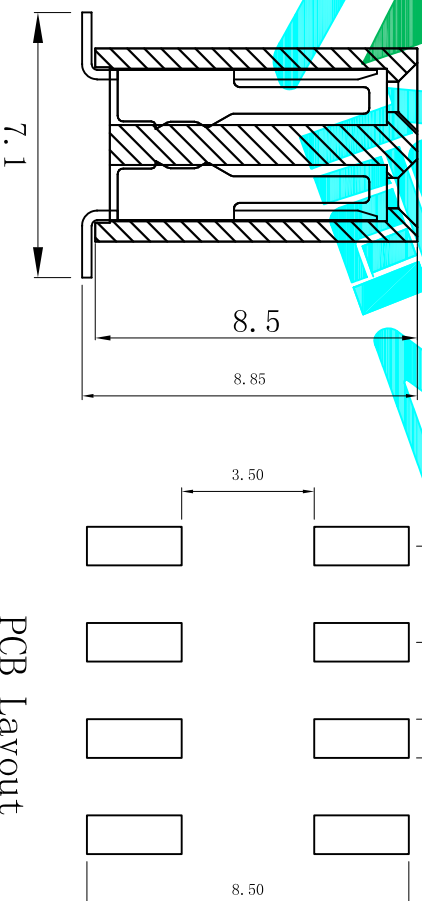


**Technical Data**  
 Material: Brass  
 Contact material: Brass  
 Plating: Gold Flash  
 Insulator material: Black polyester UL94V-0  
 Standard: PA6T+30%G. F

**Electrical:**  
 Current rating: 3Amps/contact max.  
 Contact resistance:  $\leq 20m\Omega$ /contact  
 Insulation resistance:  $\geq 1000M\Omega$  at V=100V  
 Withstanding voltage: 550V AC/ $\varnothing$ mandre

**Mechanical:**  
 Soldering temperature: +260°C, 4s max

UNSPECIFIED TOLERANCE:  $\pm 0.20$

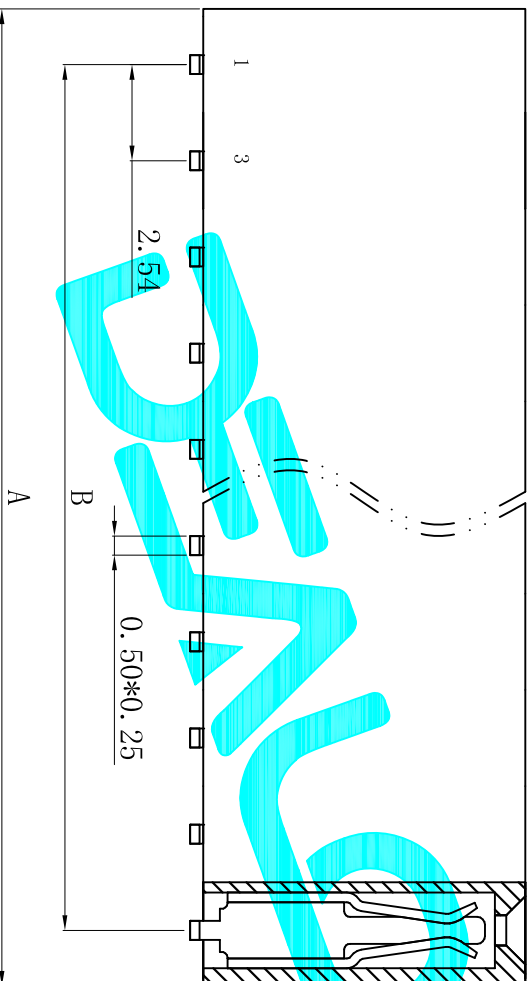

PCB Layout

$$A = 2.54 * \frac{nP}{2} + 0.40 \pm 0.35$$

$$B = 2.54 * \frac{nP}{2} - 2.54 \pm 0.20$$

Pin Number = 2 ~ 80

APPROVALS		DATE	DRAWING NO.		SHEET 1 OF 1	
DRAWN	G.M.Chen	2015/7/17	DW254S-22-XX-85		PROJ.	
CHECKED			TITLE: CONNECTOR			
APPROVALS			PART NO.		SCALE: 1:1	
TOLERANCES ARE		30 $\pm$ 0.15	±0.30	ANGLE	UNIT: mm	
		10 $\pm$ 0.10	±0.20		SCALE: 1:1	
		5 $\pm$ 0.10	±0.15	±2'	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)