
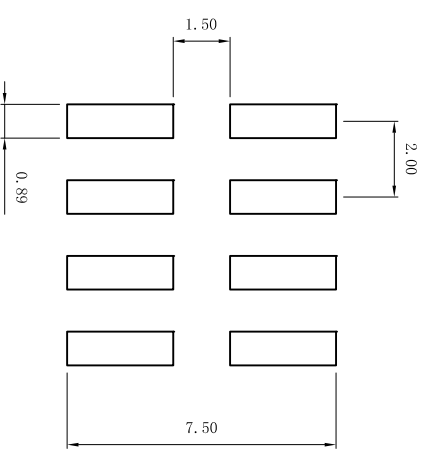


$$A = 2.0 * \frac{nP}{2} \pm 0.40$$

$$B = 2.0 * \frac{nP}{2} - 2.0 \pm 0.20$$

Pin Number=2~80

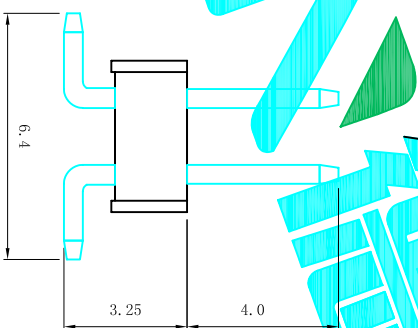

PCB Layout

Technical Data
 Material:
 Contact material: Brass
 Plating: Gold Flash
 Insulator material: Black polyester UL94V-0
 Standard: PAG+30%G. F

Electrical:
 Current rating: 1.5amps/contact max
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding voltage: 450V AC/minute

Mechanical:
 Soldering temperature: +260°C ±45 max
 UNSPECIFIED TOLERANCE: ±0.20

APPROVALS		DATE	DRAWING NO.		
DRAWN	G.M.Chen	2015/7/17	D/2200S-22-XX-64		
CHECKED			CONNECTION		
APPROVALS			PART NO.		
DRAWN		DATE	UNIT: mm	SCALE: 1:1	SHEET 1 OF 1
CHECKED			ANGLE	±2°	PROJ
APPROVALS			TOLERANCES ARE		
			30°±0.1°	±0.30	
			10°±0.1°	±0.20	
			5°±0.1°	±0.15	
			±0.10		
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)