
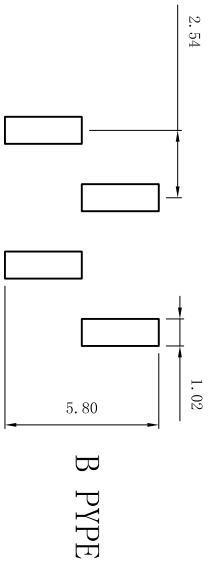


A=2.54\* $n$ P $\pm$ 0.50  
 B=2.54\* $n$ P-2.54 $\pm$ 0.20  
 Pin Number=1~40

Technical Data  
 Material:  
 Contact material:Brass  
 Plating:Gold Flash  
 Insulator material:Black polyester UL94V-0  
 Standard:PA6T+30%G.F

Electrical:  
 Current rating:3Amps/contact  
 Contact resistance: $\leq$ 20m $\Omega$ /contact  
 Insulation resistance: $\geq$ 1000M $\Omega$  at V=100V  
 Withstanding voltage:550V AC/minute

Mechanical:  
 Soldering temperature:+260 $^{\circ}$ C, 4s max  
 UNSPECIFIED TOLERANCE: $\pm$ 0.20

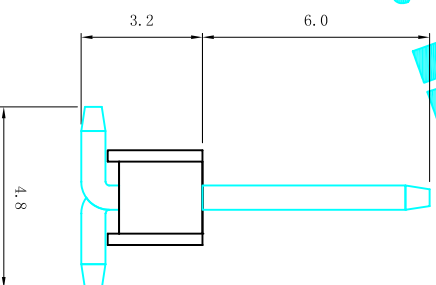

PCB Layout

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	DRAWN	
CHECKED	G.M.Chen	2015/7/17	ELECTRONICS CO.,LTD	
APPROVALS			CONNECTOR	
TOLERANCES ARE	30 $\pm$ 0.15	$\pm$ 0.30	ANGLE	$\pm$ 2 $^{\circ}$
	10 $\pm$ 0.10	$\pm$ 0.20	UNIT:	mm
	5 $\pm$ 0.13	$\pm$ 0.13	SCALE:	1:1
			DRAWING NO.	
			PART NO.	DJ254S-11-XX-48
			TITLE:	CONNECTOR
			ELECTRONICS CO.,LTD	
			SHEET 1 OF 1	
			PROJ.	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)