
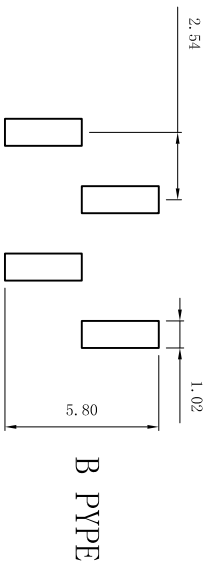


A=2.54* n P \pm 0.50
 B=2.54* n P-2.54 \pm 0.20
 Pin Number=1~40

Technical Data
 Material:
 Contact material:Brass
 Plating:Gold Flash
 Insulator material:Black polyester UL94V-0
 Standard:PA6T+30%G.F

Electrical:
 Current rating:3Amps/contact
 Contact resistance: \leq 20m Ω /contact
 Insulation resistance: \geq 1000M Ω at V=100V
 Withstanding voltage:550V AC/minute

Mechanical:
 Soldering temperature: \pm 260 $^{\circ}$ C, 4s max
 UNSPECIFIED TOLERANCE: \pm 0.20

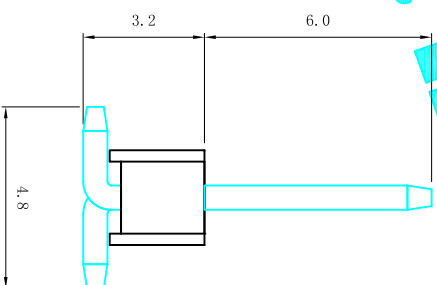

PCB Layout

APPROVALS		DATE	DRAWING NO.	
DRAWN	G.M.Chen	2015/7/17	D/2254S-11-XX-48	
CHECKED			SHEET 1 OF 1	
APPROVALS			PROJ.	
TOLERANCES ARE		ANGLE	SCALE:	
30 $^{\circ}$ MAX	\pm 0.30	\pm 2 $^{\circ}$	1:1	
10 $^{\circ}$ MIN	\pm 0.20			
5 $^{\circ}$ MIN	\pm 0.15			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.
	A		NEW	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)