
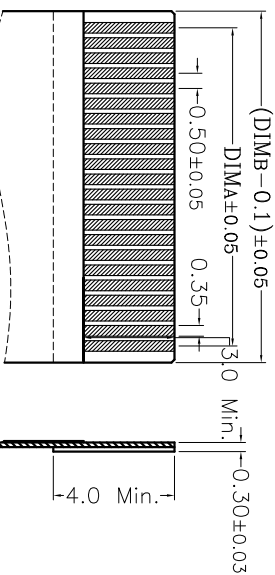
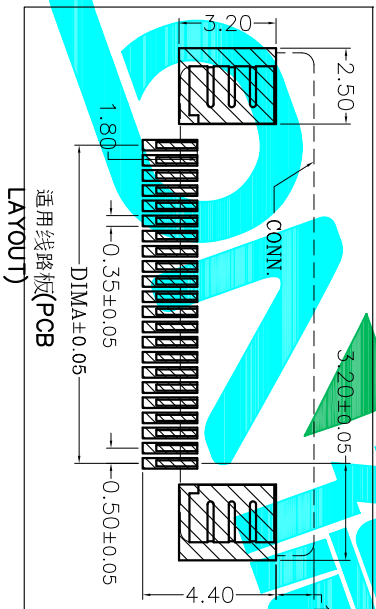


SECTION A-A

FC05-S XX DCU-00
NO OF CKT(PIN)
SERIAL NUMBER

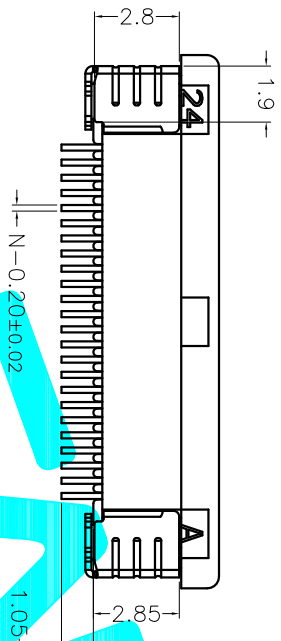

通用扁平线(Applicable Flat Cable)

- 技术指标
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象
 2. 温度范围：-25℃~85℃.
 3. 额定电压：50V·AC/DC(等效).
 4. 接触电阻：≤0.03Ω.
 5. 绝缘电阻：≥500MΩ
 6. 产品料号：

| CKT | DIM A | DIM B | DIM C | DIM D | CKT | DIM A | DIM B | DIM C | DIM D |
|-----|-------|-------|-------|-------|-----|-------|-------|-------|-------|
| 4 | 1.50 | 2.56 | 7.60 | | 33 | 16.00 | 17.06 | 22.10 | |
| 5 | 2.00 | 3.06 | 8.10 | | 34 | 16.50 | 17.56 | 22.60 | 5.20 |
| 6 | 2.50 | 3.56 | 8.60 | | 35 | 17.00 | 18.06 | 23.10 | |
| 7 | 3.00 | 4.06 | 9.10 | | 36 | 17.50 | 18.56 | 23.60 | |
| 8 | 3.50 | 4.56 | 9.60 | | 37 | 18.00 | 19.06 | 24.10 | |
| 9 | 4.00 | 5.06 | 10.10 | | 38 | 18.50 | 19.56 | 24.60 | |
| 10 | 4.50 | 5.56 | 10.60 | | 39 | 19.00 | 20.06 | 25.10 | |
| 11 | 5.00 | 6.06 | 11.10 | | 40 | 19.50 | 20.56 | 25.60 | |
| 12 | 5.50 | 6.56 | 11.60 | | 41 | 20.00 | 21.06 | 26.10 | |
| 13 | 6.00 | 7.06 | 12.10 | | 42 | 20.50 | 21.56 | 26.60 | |
| 14 | 6.50 | 7.56 | 12.60 | | 43 | 21.00 | 22.06 | 27.10 | |
| 15 | 7.00 | 8.06 | 13.10 | | 44 | 21.50 | 22.56 | 27.60 | |
| 16 | 7.50 | 8.56 | 13.60 | | 45 | 22.00 | 23.06 | 28.10 | |
| 17 | 8.00 | 9.06 | 14.10 | | 46 | 22.50 | 23.56 | 28.60 | |
| 18 | 8.50 | 9.56 | 14.60 | 5.20 | 47 | 23.00 | 24.06 | 29.10 | |
| 19 | 9.00 | 10.06 | 15.10 | | 48 | 23.50 | 24.56 | 29.60 | 5.75 |
| 20 | 9.50 | 10.56 | 15.60 | | 49 | 24.00 | 25.06 | 30.10 | |
| 21 | 10.00 | 11.06 | 16.10 | | 50 | 24.50 | 25.56 | 30.60 | |
| 22 | 10.50 | 11.56 | 16.60 | | 51 | 25.00 | 26.06 | 31.10 | |
| 23 | 11.00 | 12.06 | 17.10 | | 52 | 25.50 | 26.56 | 31.60 | |
| 24 | 11.50 | 12.56 | 17.60 | | 53 | 26.00 | 27.06 | 32.10 | |
| 25 | 12.00 | 13.06 | 18.10 | | 54 | 26.50 | 27.56 | 32.60 | |
| 26 | 12.50 | 13.56 | 18.60 | | 55 | 27.00 | 28.06 | 33.10 | |
| 27 | 13.00 | 14.06 | 19.10 | | 56 | 27.50 | 28.56 | 33.60 | |
| 28 | 13.50 | 14.56 | 19.60 | | 57 | 28.00 | 29.06 | 34.10 | |
| 29 | 14.00 | 15.06 | 20.10 | | 58 | 28.50 | 29.56 | 34.60 | |
| 30 | 14.50 | 15.56 | 20.60 | | 59 | 29.00 | 30.06 | 35.10 | |
| 31 | 15.00 | 16.06 | 21.10 | | 60 | 29.50 | 30.56 | 35.60 | |
| 32 | 15.50 | 16.56 | 21.60 | | | | | | |

| APPROVALS | | DATE | PART NO. | | SCALE | SHEET |
|----------------|----------|-----------|---------------------|--|-------|--------|
| DRAWN | G.M.Chen | 2015/7/17 | FC05-SXXDCU-00 | | 1:1 | 1 OF 1 |
| CHECKED | | | FPC CONNECTOR | | | |
| APPROVALS | | | ELECTRONICS CO.,LTD | | | |
| TOLERANCES ARE | | | DRAWING NO. | | | |
| 30~0.15 | ±0.30 | ANGLE | | | | |
| 10~0.30 | ±0.20 | ANGLE | | | | |
| 5~0.10 | ±0.15 | ±2° | | | | |
| ~5 | ±0.10 | | | | | |
| ECN NO. | REV. | DATE. | DESCRIPTION. | | | |
| | A | | NEW | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)