


Recommended P.C.B Layout

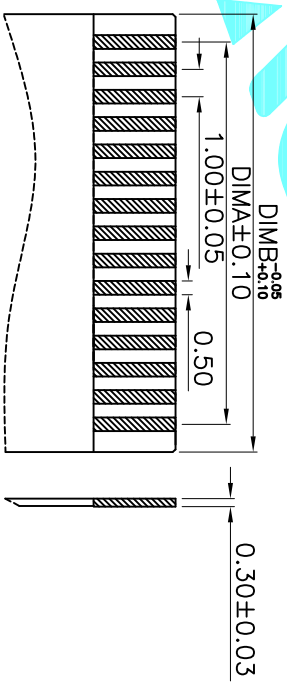

Specification:
 Rating: 50V DC/AC
 Contact Resistance: 30 mΩ Max.
 Insulation resistance: 500 MΩ min
 Operating temperature: -25°C~85°C

FC10-S XX DCU-00
 NO OF KKT(PIN)
 SERIAL NUMBER

| OKT | DIMA | DIMB | DIMC |
|-----|-------|-------|-------|
| 4 | 3.00 | 5.03 | 11.00 |
| 5 | 4.00 | 6.03 | 12.00 |
| 6 | 5.00 | 7.03 | 13.00 |
| 7 | 6.00 | 8.03 | 14.00 |
| 8 | 7.00 | 9.03 | 15.00 |
| 9 | 8.00 | 10.03 | 16.00 |
| 10 | 9.00 | 11.03 | 17.00 |
| 11 | 10.00 | 12.03 | 18.00 |
| 12 | 11.00 | 13.03 | 19.00 |
| 13 | 12.00 | 14.03 | 20.00 |
| 14 | 13.00 | 15.03 | 21.00 |
| 15 | 14.00 | 16.03 | 22.00 |
| 16 | 15.00 | 17.03 | 23.00 |
| 17 | 16.00 | 18.03 | 24.00 |
| 18 | 17.00 | 19.03 | 25.00 |
| 19 | 18.00 | 20.03 | 26.00 |
| 20 | 19.00 | 21.03 | 27.00 |
| 21 | 20.00 | 22.03 | 28.00 |
| 22 | 21.00 | 23.03 | 29.00 |
| 23 | 22.00 | 24.03 | 30.00 |
| 24 | 23.00 | 25.03 | 31.00 |
| 25 | 24.00 | 26.03 | 32.00 |
| 26 | 25.00 | 27.03 | 33.00 |
| 27 | 26.00 | 28.03 | 34.00 |
| 28 | 27.00 | 29.03 | 35.00 |
| 29 | 28.00 | 30.03 | 36.00 |
| 30 | 29.00 | 31.03 | 37.00 |
| 31 | 30.00 | 32.03 | 38.00 |
| 32 | 31.00 | 33.03 | 39.00 |
| 33 | 32.00 | 34.03 | 40.00 |
| 34 | 33.00 | 35.03 | 41.00 |
| 35 | 34.00 | 36.03 | 42.00 |
| 36 | 35.00 | 37.03 | 43.00 |
| 37 | 36.00 | 38.03 | 44.00 |
| 38 | 37.00 | 39.03 | 45.00 |
| 39 | 38.00 | 40.03 | 46.00 |
| 40 | 39.00 | 41.03 | 47.00 |

| ITEM | PART NAME | QTY. | MATERIAL | FINISHING |
|------|-------------|------|-------------|------------|
| ④ | Punching | 1 | Brass | Ni Plating |
| ③ | Cover | 1 | LCP | White |
| ② | Terminal | X | Bross strip | Ni Plating |
| ① | Rubber core | 1 | LCP | Black |

| APPROVALS | DATE | TITLE: |
|-----------|----------|------------|
| DRAWN | G.M.Chen | 2014/11/26 |
| CHECKED | | |
| APPROVALS | | |

| APPROVALS | DATE | TITLE: | PART NO. | SCALE: | SHEET |
|-----------|----------|------------|----------------|--------|--------|
| DRAWN | G.M.Chen | 2014/11/26 | FC10-SXXDCU-00 | 1:1 | 1 OF 1 |
| CHECKED | | | | | |
| APPROVALS | | | | | |

| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|------|-------|--------------|---------|--------|--------|
| | A | | NEW | | | |

| TOLERANCES ARE | 30~125L | ±0.30 | ANGLE | ±2° | DRAWING NO. |
|----------------|---------|-------------------------------------|-------|-----|-------------|
| | 10~30 | ±0.20 <td></td> <td></td> <td></td> | | | |
| | 5~10 | ±0.15 <td></td> <td></td> <td></td> | | | |
| | ~5 | ±0.10 <td></td> <td></td> <td></td> | | | |

DEALON 德隆
 ELECTRONICS CO.,LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)