
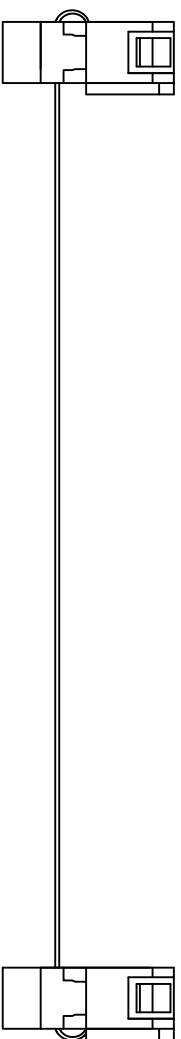
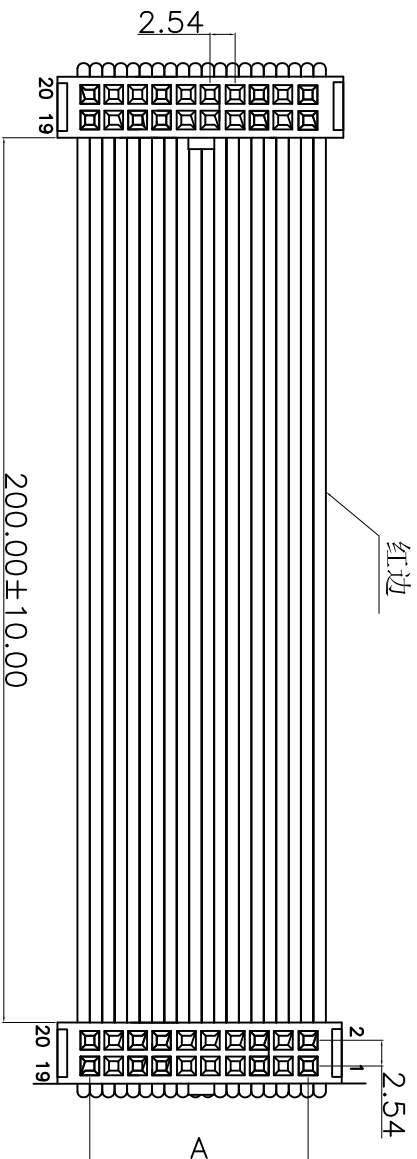


PIN ASSIGNMENT:

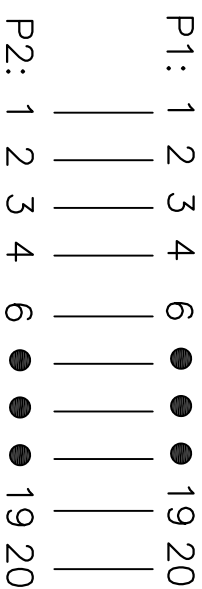

序号	名称	规格说明	数量
1	端子	IDC-XXP 二件式 (2.54mm)	1
2	线材	2651/28#1.27间距灰排	1
3	卡扣	反扣-XXP (2.54mm)	1

MATERIAL (IDC)
 INSULATOR:PBT (UL 94V-0)
 Contact: Copper Alloy.
 Contact Plated:Gold or Tin over
 Nickel Plated.

SPECIFICATIONS
 TEMPERATURE RANGE: -20° C TO +105° C
 CONTACT RESISTANCE: 3Ω MAX
 INSULATION RESISTANCE: 5MΩ MIN.
 WITHSTANDING VOLTAGE: 300V 10S

Pin	A
6	2*3
8	2*4
10	2*5
12	2*6
14	2*7
16	2*8
18	2*9
20	2*10

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	G.M.Chen	2015/3/30	EDELON 德之隆® ELECTRONICS CO.,LTD	
CHECKED			LEADWIRE	
APPROVALS			PART NO.	IDC-265126-200-XXP
TOLERANCES ARE		30 ^{+0.15} 10 ^{+0.10} 5 ^{+0.10}	±0.30 ±0.20 ±0.15	ANGLE ±2°
			UNIT: mm	SCALE: 1:1
			DRAWING NO.	SHEET 1 OF 1
				PROJ.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC / FPC Jumper Cables](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[8-1474659-7](#) [FSK-21.5A-20](#) [FSK-23A](#) [FSN-14.5A-6](#) [1474494-5](#) [1557385-1](#) [2-1437211-4](#) [2-6447164-4](#) [1-6437133-3](#) [FSK-21A](#) [FSN-21.5A-32](#) [FSN-24A](#) [2-1437181-9](#) [4-1437186-9](#) [4-1474659-8](#) [5-1474654-9](#) [6-6437158-0](#) [1474544-1](#) [7-6474640-3](#) [8-1474644-8](#) [FSK-22Z-12](#) [1437190-1](#) [2-6437158-6](#) [3-1437213-7](#) [FSK-11.25A-40](#) [FSN-11A-10](#) [FSP-22A](#) [FST-41B-5](#) [1-1437203-7](#) [6447164-6](#) [1474678-7](#) [3-1437219-8](#) [FSK-11.1A-40](#) [FSN-11.5A-3](#) [1437219-2](#) [05-001-152FB](#) [05-001.5-152FB](#) [7-1437166-1](#) [5-1474677-4](#) [3-1447175-2](#) [4-6447189-2](#) [15020-1538](#) [FSK-21.3A-25](#) [07-004.5-172-P](#) [JS05B-12P-030-3-4](#) [JS05A-16P-080-4-8](#) [JS05A-12P-050-3-4](#) [JS05A-16P-100-3-4](#) [JS05A-12P-100-3-4](#) [JS05A-04P-100-4-8](#)