



Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	08	14.00	18.00
03	4.00	8.00	09	16.00	20.00
04	6.00	10.00	10	18.00	22.00
05	8.00	12.00	11	22.00	24.00
06	10.00	14.00	12	24.00	26.00
07	12.00	16.00	13	26.00	28.00

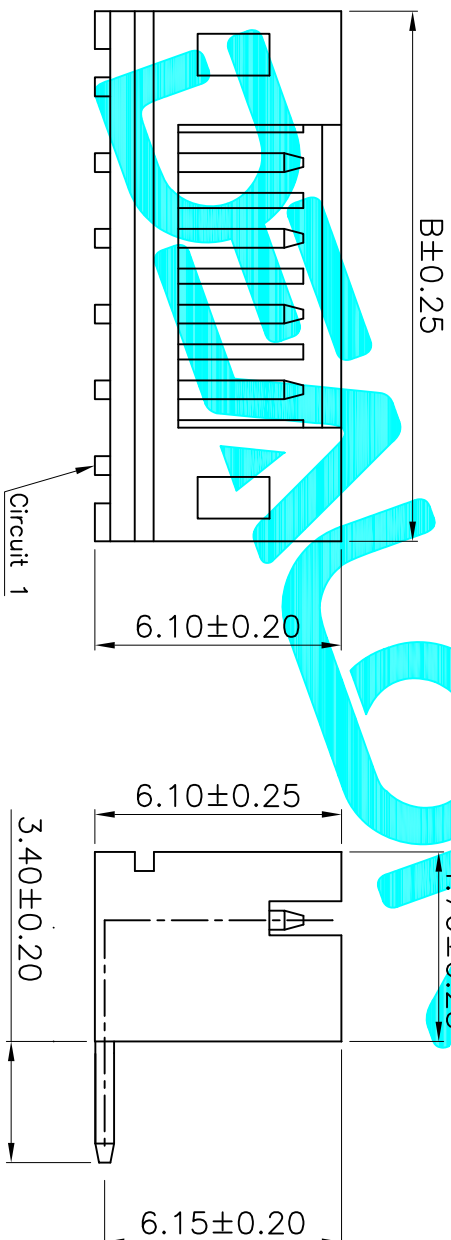

- 技术指标:
 1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 2. 温度范围: -25° C~85° C.
 3. 额定电压: 50V, AC, DC.
 4. 接触电阻: ≤0.02Ω.
 5. 绝缘电阻: ≥100MΩ

P.C.B LAYOUT

APPROVALS		DATE	DRAWING NO.	
DRAWN	G.M.Chen	2015/7/17	EDELON 德之隆® ELECTRONICS CO.,LTD	
CHECKED			TITLE: 2.0 Pitch 弯插	
APPROVALS			PART NO.	PH-XXAW
APPROVALS			UNIT: mm	SCALE: 1:1
APPROVALS			DRAWING NO.	SHEET 1 OF 1
APPROVALS				PROJ.
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	

APPROVALS		DATE	DRAWING NO.	
DRAWN	G.M.Chen	2015/7/17	EDELON 德之隆® ELECTRONICS CO.,LTD	
CHECKED			TITLE: 2.0 Pitch 弯插	
APPROVALS			PART NO.	PH-XXAW
APPROVALS			UNIT: mm	SCALE: 1:1
APPROVALS			DRAWING NO.	SHEET 1 OF 1
APPROVALS				PROJ.
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)