


Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	08	14.00	18.00
03	4.00	8.00	09	16.00	20.00
04	6.00	10.00	10	18.00	22.00
05	8.00	12.00	11	22.00	24.00
06	10.00	14.00	12	24.00	26.00
07	12.00	16.00	13	26.00	28.00

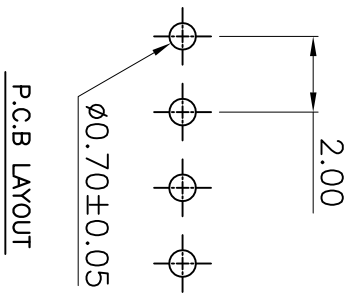

- 技术指标:  
 1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。  
 2. 温度范围: -25° C~85° C.  
 3. 额定电压: 50V, AC, DC.  
 4. 接触电阻: ≤0.02Ω.  
 5. 绝缘电阻: ≥100MΩ

APPROVALS		DATE	DRAWING NO.	
DRAWN	G.M.Chen	2015/7/17	PH-XXAW	
CHECKED			SHEET 1 OF 1	
APPROVALS			PROJ.	
TOLERANCES ARE: 30~40L ±0.30 ANGLE UNIT: mm SCALE: 1:1 SHEET 1 OF 1 10~30 ±0.20 ±2° 5~10 ±0.15 ±2° ~5 ±0.10 ±2°				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.
	A		NEW	

**DEALON 德之隆**  
 ELECTRONICS CO.,LTD

2.0 Pitch 弯插

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [M90C108951C](#)  
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [80.063.4001.1](#)  
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-024-10-](#)  
[001000](#) [803-93-012-10-001000](#)