


Recommend PCB Layout

Specifications :
 Voltage ratings: 250V AC / DC
 Current rating: 7A AC / DC
 Withstanding voltage: 1500V AC/minute
 Temperature range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Contact resistance: $\leq 10\text{m}\Omega$
 After environmental testing: $\leq 20\text{m}\Omega$

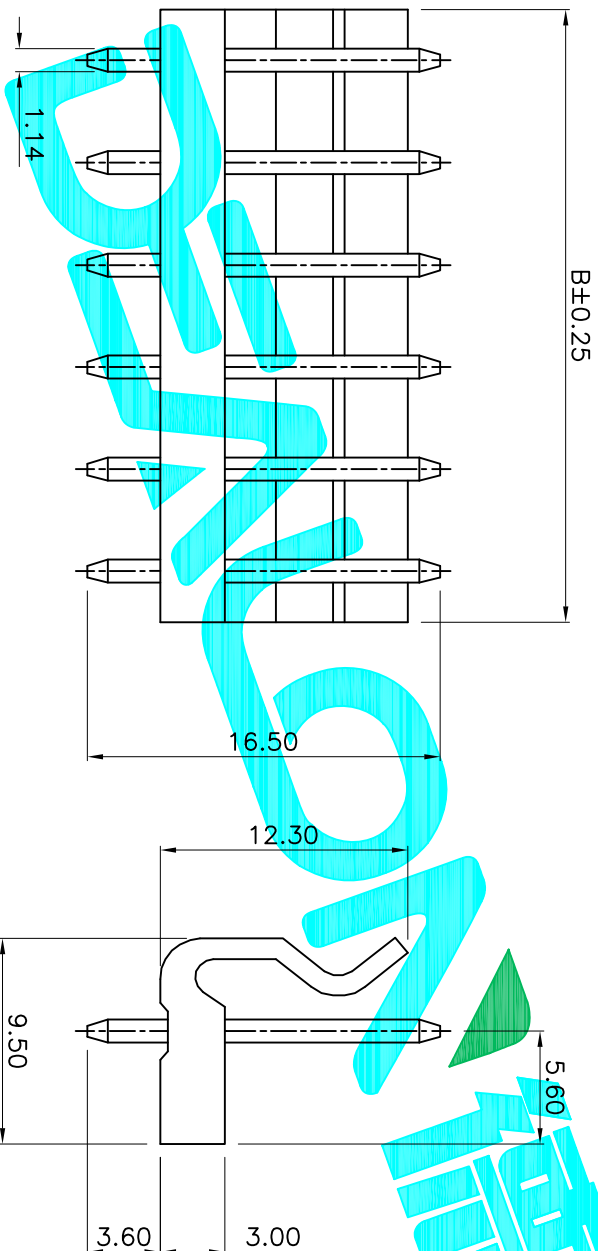

Poles	Dimensions(mm)		Dimensions(mm)	
	A	B	A	B
02	3.96	7.92	31.68	35.64
03	7.92	11.88	35.64	39.60
04	11.88	15.84	39.60	43.56
05	15.84	19.80	43.56	47.52
06	19.80	23.76	47.52	51.48
07	23.76	27.72	51.48	55.44
08	27.72	31.68	55.44	59.40

APPROVALS		DATE	PART NO.		SCALE:	SHEET
DRAWN	G.M.Chen	2015/5/29	3.96mm Crimp Style Connectors		1:1	1 OF 1
CHECKED			X396WV-XXX			
APPROVALS						
TOLERANCES ARE						
	30 ^{+0.15}	± 0.30	ANGLE			
	10 ^{+0.30}	± 0.20	UNIT: mm			
	5 ^{+0.10}	± 0.15	DRAWING NO.			
	~ 5	± 0.10				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

DEALON 德之隆
 ELECTRONICS CO.,LTD

PROJ.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)