

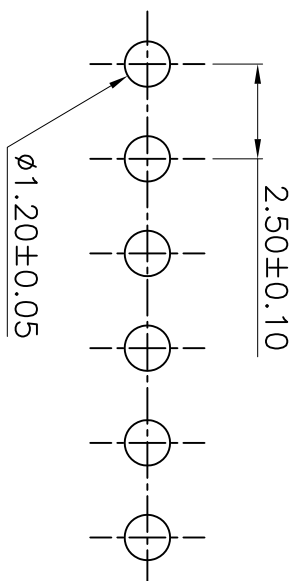


B±0.25

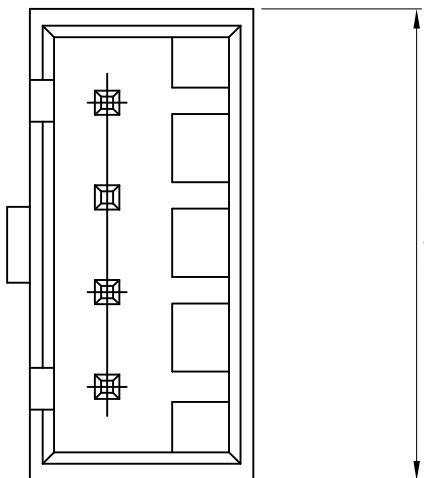

P.C.B LAYOUT

Poles	Dimensions (mm)	
	A	B
1	2.50	7.50
2	5.00	10.00
3	10.00	12.50
4	15.00	15.00
5	20.00	17.50
6	25.00	20.00
7	30.00	22.50
8	35.00	25.00
9	40.00	27.50
10	45.00	30.00
11	50.00	32.50
12	55.00	35.00
13	60.00	37.50
14	65.00	40.00
15	70.00	42.50
16	75.00	45.00

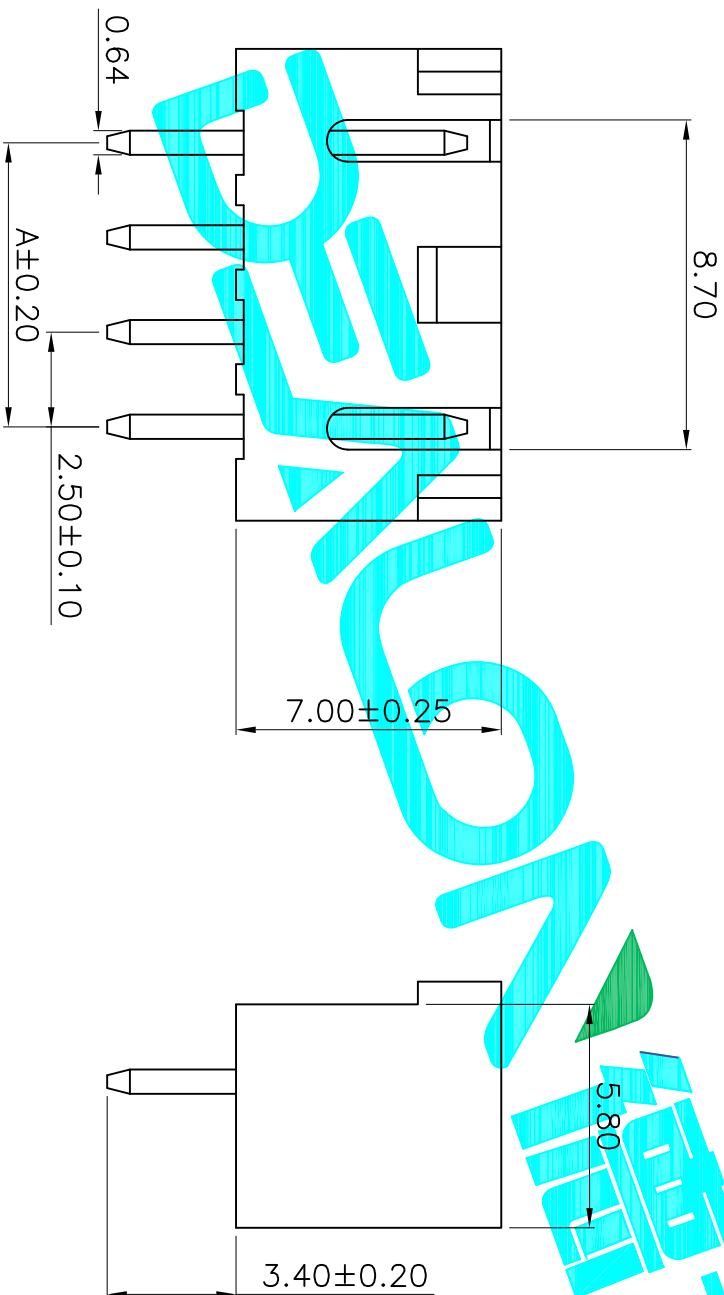

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC,DC.
4. 接触电阻: ≤0.02Ω.
5. 绝缘电阻: ≥100MΩ.

APPROVALS		DATE	ELECTRONICS CO.,LTD	
DRAWN	G.M.Chen	2015/7/17	DEALON 德之隆	
CHECKED			ELECTRONICS CO.,LTD	
APPROVALS			2.5 Pitch 直插	
TOLERANCES ARE		30~40 ±0.30	ANGLE	PART NO. XHB-XXA
	10~30 ±0.20	5~10 ±0.15	±2°	UNIT: mm
	~5 ±0.10			SCALE: 1:1
CHANGE.	CHECK.	APPRO.	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV. A	DATE.	DESCRIPTION.	PROJ
			NEW	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)