

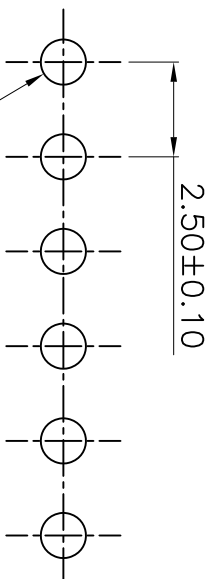


B±0.25

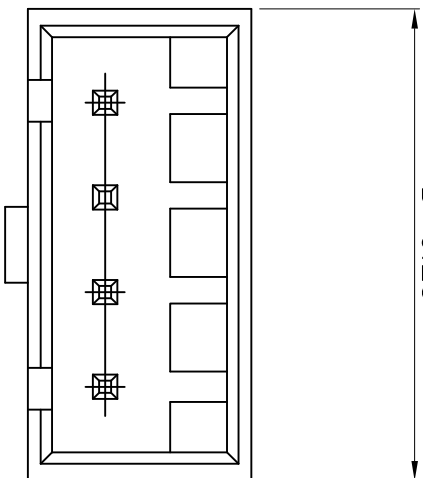

P.C.B LAYOUT

Poles	Dimensions (mm)	
	A	B
1	2.50	7.50
2	5.00	10.00
3	10.00	12.50
4	15.00	15.00
5	20.00	17.50
6	25.00	20.00
7	30.00	22.50
8	35.00	25.00
9	40.00	27.50
10	45.00	30.00
11	50.00	32.50
12	55.00	35.00
13	60.00	37.50
14	65.00	40.00
15	70.00	42.50
16	75.00	45.00

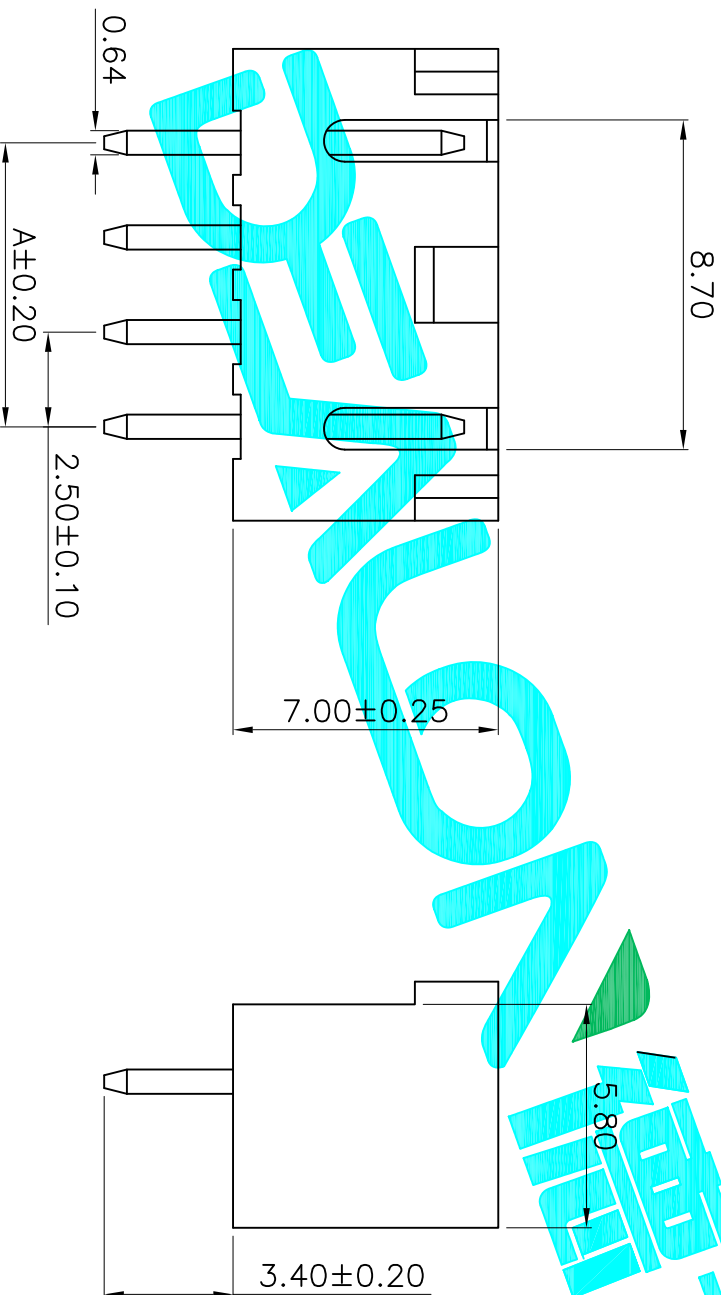

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
  2. 温度范围: -25° C~85° C.
  3. 额定电压: 50V, AC,DC.
  4. 接触电阻: ≤0.02Ω.
  5. 绝缘电阻: ≥100MΩ.

APPROVALS		DATE	PART NO.		SCALE		SHEET	
DRAWN	CHECKED		APPROVALS	TOLERANCES ARE	UNIT: mm	1:1	1 OF 1	
G.M.Chen		2015/7/17		±0.30 ±0.20 ±0.15 ±0.10	mm	1:1	1 OF 1	
				30~0.15 10~0.30 5~0.10				
NEW			XHB-D-XXA					
DESCRIPTION.			2.5 Pitch 直插					
ECN NO.	REV.	DATE.	CHANGE.	CHECK.	APPRO.	PROJ.		
	A							

DEALON 德之隆  
ELECTRONICS CO.,LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [M90C108951C](#)  
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [80.063.4001.1](#)  
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-024-10-](#)  
[001000](#) [803-93-012-10-001000](#)