

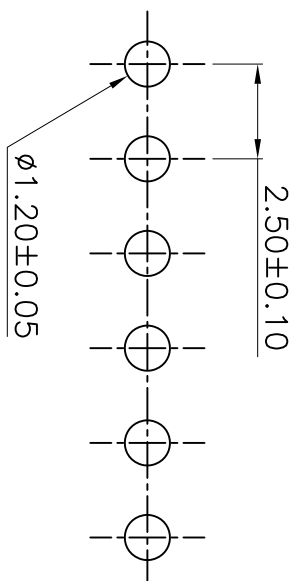


B±0.25

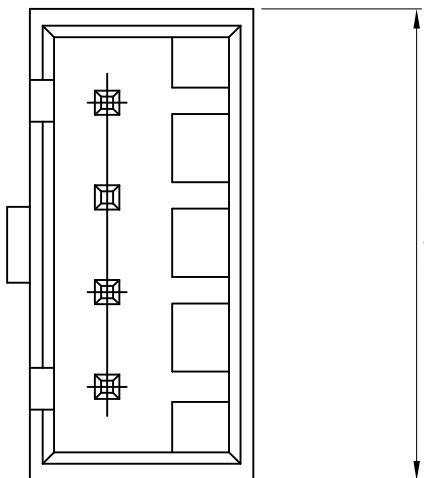

P.C.B LAYOUT

Poles	Dimensions (mm)	
	A	B
1	2.50	7.50
2	5.00	10.00
3	10.00	12.50
4	15.00	15.00
5	20.00	17.50
6	25.00	20.00
7	30.00	22.50
8	35.00	25.00
9	40.00	27.50
10	45.00	30.00
11	50.00	32.50
12	55.00	35.00
13	60.00	37.50
14	65.00	40.00
15	70.00	42.50
16	75.00	45.00

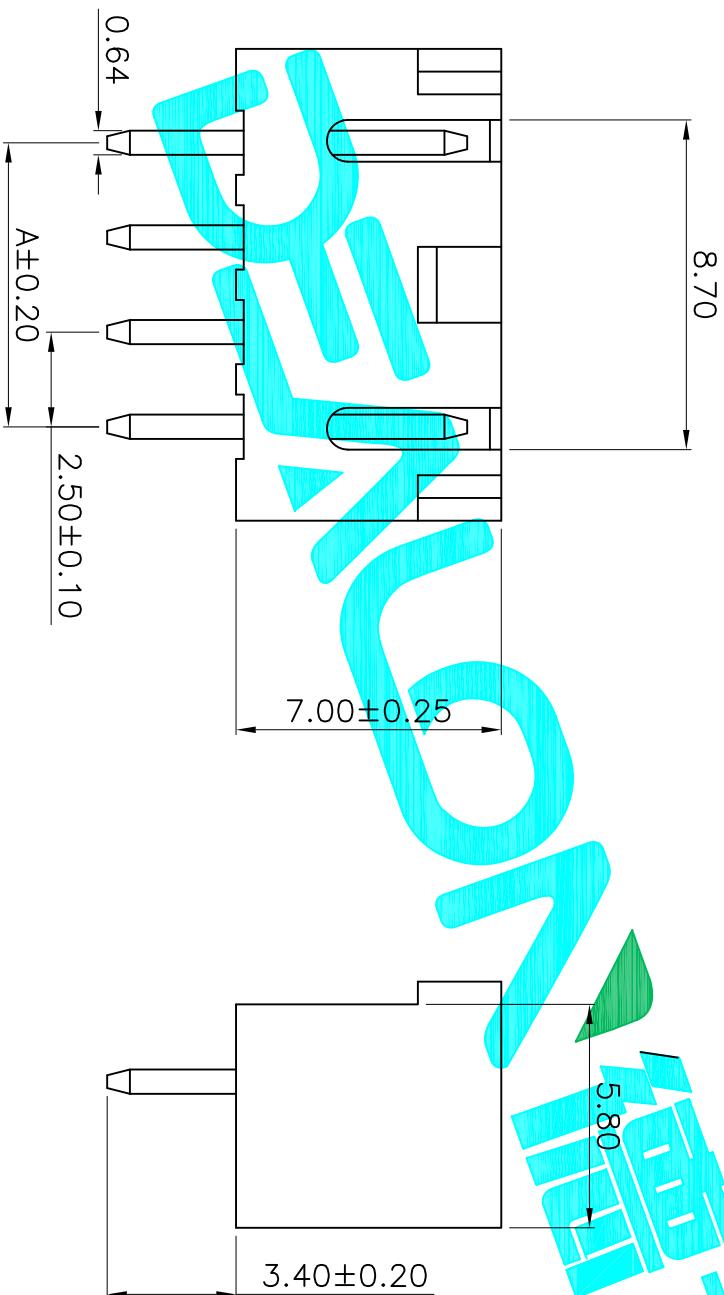

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC,DC.
4. 接触电阻: ≤0.02Ω.
5. 绝缘电阻: ≥100MΩ.

APPROVALS		DATE	TOLERANCES ARE		ANGLE	UNIT: mm	SCALE: 1:1	SHEET 1 OF 1
DRAWN	G.M.Chen	2015/7/17	±0.30	±0.20	±2°	mm	1:1	1 OF 1
CHECKED			10~30	±0.13				
APPROVALS			30~40	±0.20				
			40~50	±0.25				
			50~60	±0.30				
			60~70	±0.35				
			70~80	±0.40				
			80~90	±0.45				
			90~100	±0.50				
ECN NO.	REV.	DATE.	DESCRIPTION.		CHANGE.	CHECK.	APPRO.	PROJ.
	A		NEW					

DEALON 德之隆  
ELECTRONICS CO.,LTD

2.5 Pitch 直插

XHB-D-XXA

PROJ.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [DEALON](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#)  
[61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-](#)  
[047](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [M90C108951C](#) [70.362.1628.0](#)  
[70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-](#)  
[T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#)