

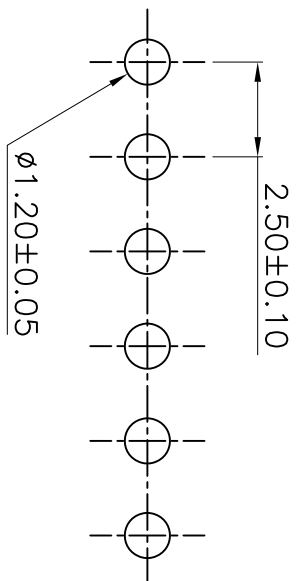


B±0.25

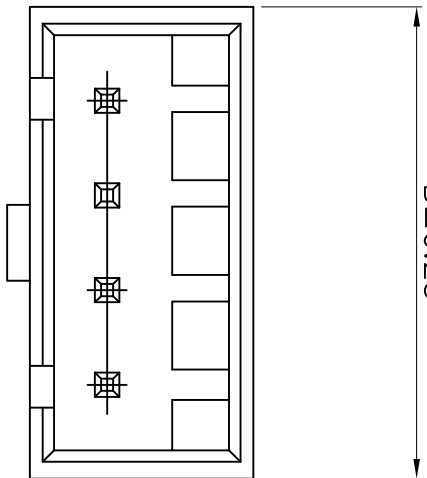

P.C.B LAYOUT

Poles	Dimensions (mm)	
	A	B
1	2.50	7.50
2	5.00	10.00
3	10.00	12.50
4	15.00	15.00
5	20.00	17.50
6	25.00	20.00
7	30.00	22.50
8	35.00	25.00
9	40.00	27.50
10	45.00	30.00
11	50.00	32.50
12	55.00	35.00
13	60.00	37.50
14	65.00	40.00
15	70.00	42.50
16	75.00	45.00

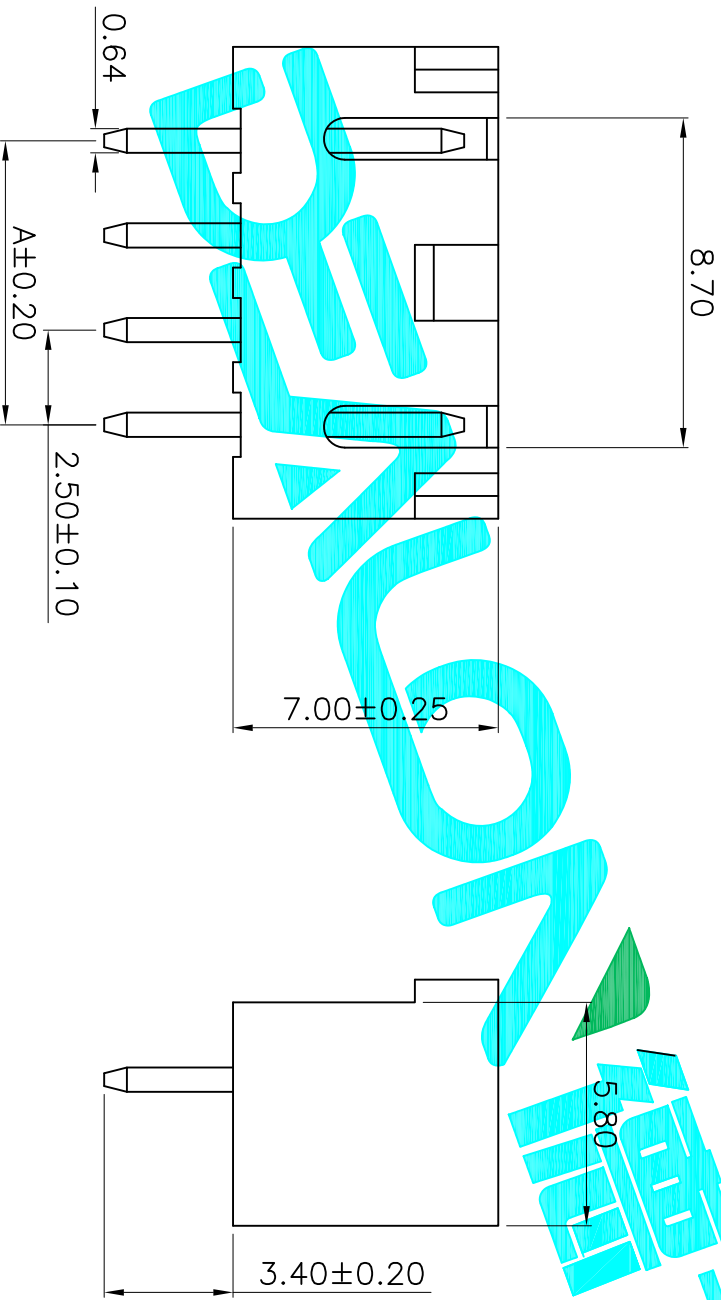

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC,DC.
4. 接触电阻: ≤0.02Ω.
5. 绝缘电阻: ≥100MΩ.

APPROVALS		DATE	PART NO.		SCALE: 1:1	SHEET 1 OF 1
DRAWN	G.M.Chen	2015/7/17	XHB-D-XXA		PROJ	
CHECKED			2.5 Pitch 直插			
APPROVALS						
ELECTRONICS CO.,LTD						
DEALON 德之隆						
TITLE: 2.5 Pitch 直插						
TOLERANCES ARE						
30~40	±0.30	ANGLE	±2°			
10~30	±0.20	UNIT: mm				
5~10	±0.15	DRAWING NO.				
~5	±0.10					
CHANGE.	CHECK.	APPRO.				
DESCRIPTION.	NEW					
REV.	A					
DATE.						
ECN NO.						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [DEALON](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)