

INTRODUCTIONS


1. Two-stage filters provide high performance in suppressing both line-to-line and line-to-ground noise.
2. All part numbers are UL recognized, CSA certified and VDE approved.

COMPONENTS

PART NO.	C1,C2,C3(uF)	L1,L2(mH)
02DRCG5	0.1	2.4
02DRCW5		
03DRCG5	0.22	1.7
03DRCW5		2.8
03DRDG3S		
03DRDW3S		
05DRCG5	0.22	1.6
05DRCW5		1.3
05DRDG3S		
05DRDW3S		
10DRCG5	0.1	1.0
10DRCS5		
10DRCW5		
*15DRCG5	0.1	0.9
•20DRGG5	0.22	1.0
•20DRGS5		

R: 2.2MΩ, Cy: 3300pF.
 * No safety approval yet, R: 1.0MΩ
 • VDE approved to 16A/250VAC, C2: 0.33 uF

ELECTRICAL SCHEMATIC

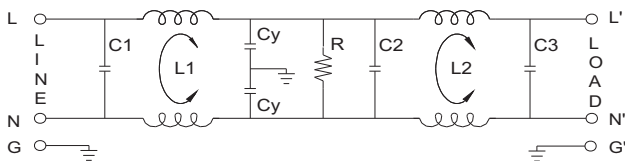

SPECIFICATIONS



1. Maximum leakage current each line-to-ground @ 115VAC 60Hz: 0.25mA @ 250VAC 50Hz: 0.45mA
2. Hipot rating (one minute) line-to-ground: 2250VDC line-to-line: 1450VDC
3. Operating frequency: 50/60Hz
4. Rated voltage: 115/250VAC

SERIES DIMENSIONS

PART NO.	DIMENSIONS IN INCHES/mm					
	A	B	C	D	E	
02DRCG5	3.25	1.82	1.15	2.38	2.77	
	82.5				70.4	
02DRCW5	2.08	46.2		2.77	60.5	70.4
	52.8					
03DRCG5	3.75	2.02	29.2	2.94	3.34	
	95.2	51.3			84.8	
03DRCW5	2.58	2.04	74.7	74.7	84.8	
	65.5	51.8				
03DRDG3S	3.14	2.02	1.28	1.575	0.61	
	79.8				15.5	
03DRDW3S	2.55		51.3	32.5	40.0	15.5
	64.8					
05DRCG5	3.75	51.3	1.15	2.94	3.34	
	95.2				84.8	
05DRCW5	2.58		2.04	29.2	74.7	84.8
	65.5					
05DRDG3S	3.14	2.02	1.27	1.575	0.61	
	79.8				15.5	
05DRDW3S	2.55		51.3	32.3	40.0	15.5
	64.8					
10DRCG5	3.75	51.3	1.52	2.94	3.34	
	95.2				84.5	
10DRCS5	3.87		98.3	38.6	74.6	84.5
	2.50					
10DRCW5	63.5					
15DRCG5	3.75	2.08	1.79	2.94	3.36	
	95.2	52.8	45.5	74.7	85.3	
20DRGG5	5.14	3.33	1.52	3.75	4.14	
	130.5	84.6	38.6	95.3	105.1	
20DRGS5						

GENERAL PURPOSE TWO-STAGE FILTERS

INSERTION LOSS (TYPICAL)

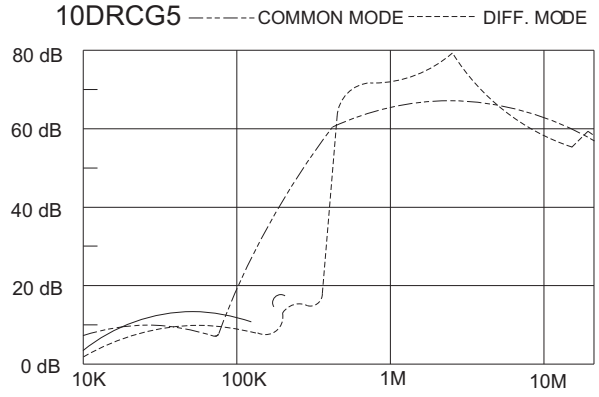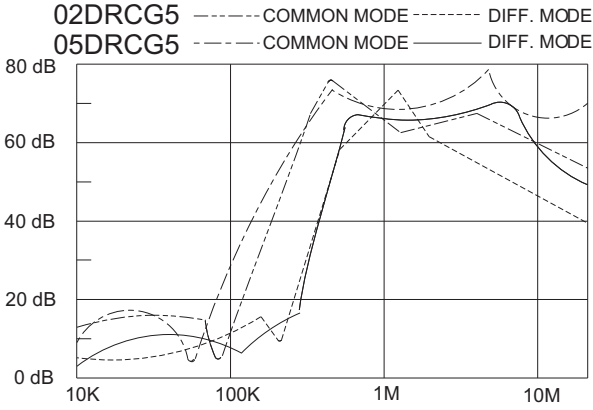


MINIMUM INSERTION LOSS IN dB


COMMON MODE (L-G) IN 50 OHM SYSTEM						
CURRENT RATING	FREQUENCY-MHz					
	.15	.50	1.0	5.0	10	30
2A	40	60	65	55	50	40
3, 5A	40	60	65	65	60	45
3, 5A(S)	38	60	65	55	45	40
10A	30	60	65	50	45	40
15A	23	45	50	45	40	30
20A	20	35	40	50	55	40

DIFFERENTIAL MODE (L-L) IN 50 OHM SYSTEM						
2A	5	50	65	60	54	46
3, 5A	12	60	65	60	54	46
3, 5A(S)	10	65	70	70	60	50
10A	7	53	60	55	45	40
15A	8	30	40	45	40	40
20A	7	55	50	50	55	40



MECHANICAL CONSTRUCTION



CW5




GG5




UNIT: $\frac{\text{INCH}}{\text{mm}}$


MECHANICAL CONSTRUCTION




GS5

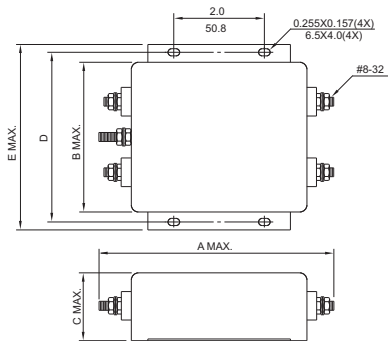


CG5




CS5



DG3S

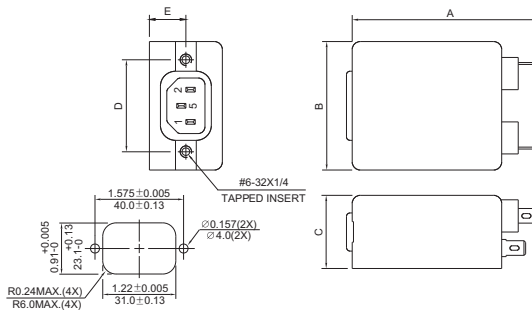

DW3S

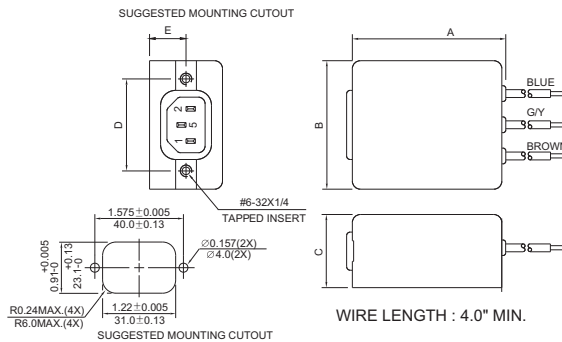

UNIT: INCH
mm

GENERAL PURPOSE TWO-STAGE FILTERS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Line Filters](#) category:

Click to view products by [Delta](#) manufacturer:

Other Similar products are found below :

[6609019-3](#) [6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [7-1609090-5](#) [F2810](#) [F4456A](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FN2410H-80-34](#) [FP144](#) [FS4153-20-06](#) [FS4353-500-99](#) [12-MMB-030-11-D](#) [DB4-393](#) [15811T200](#) [20B1](#) [LC630](#) [2B1](#) [1609080-2](#) [1609993-8](#) [1-6609070-1](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [F4041Z](#) [F7585E](#) [1B1](#) [FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-8-44](#) [FN323B-6-01](#) [FN3258H-130-35](#) [FN610R-3-06](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#)