



FEATURES

- Ultra wide input voltage range, 18~106V
- 240W Output @ 18V~27V Vin range
- 360W Output @ 27~106V Vin range (Including 27V)
- Full Load Efficiency up to 90.5% @48Vin
- Intergrated fuse holder
- Parallel Connection of multiple units
- Box type package with metal base plate
- Package Dimension:
190.0x76.0x44.0mm (7.48"x2.99"x1.73")
- Operating Temperature Range - 40°C to +75°C
- Input Reverse Polarity Protection
- Minimized Inrush current
- Input UVLO, Output OCL, SCP, OVP, OTP
- Enable on/off (option)
- 2250VDC Isolation
- IP67 protection for selective model
- RoHs Compliant
- ISO 9001, ISO 14001 certified manufacturing facility
- UL60950
- CE Mark
- EMC compatible: EN12895, CISPR11 ClassA
- Electrical transient conduction: ISO7637-2

The B62SR24015, a ultra wide input voltage range of 18~106V, and single isolated output converter, is the latest product offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. Such box type DCDC converter can provide 360W (240W at Vin < 27V), 24.5V regulated DC output voltage with full load efficiency up to 90.5% @48Vin; The B62SR24015 offers input UVLO, output over current limit, short circuit, output over voltage, over temperature, and input reverse polarity protections. It has an option for intergrated fuse holder and enable on/off function. It also has parallel function; and allows a wide operating temperature range of -40°C to +75°C. With creative design technology and optimization of component placement, this converter possess outstanding electrical and thermal performance, as well as high reliability under extrmely harsh operating conditions. The B62SR24015 meets IP67 protecion (refer to “water protection level” specification).

Input Characteristics

Item	Condition	Min.	Typ.	Max.	Unit
Continuous Input Voltage		18	48	106	VDC
Max Input voltage	10 minutes, normal operating			126	VDC
Input Under-Voltage Lockout, Turn-On Voltage Threshold		16	17	18	VDC
Input Under-Voltage Lockout, Turn-Off Voltage Threshold		14	15	16	VDC
Lockout Hysteresis Voltage		1	2	3	VDC
Maximum Input Current	Vin=18V, 100% Load		15.5	16.0	A
No-Load Input Current	Vin=24V		235	265	mA
	Vin=48V		105	130	mA
	Vin=72V, 80V		70	100	mA
Off converter input current	Vin=48V		15	25	mA
Reflected input ripple current	Vin=48V, Vpp			0.6	A
Max Reverse Polarity Input Voltage				106	VDC
Max Inrush current				10	A
Internal Input Fuse	Ø6.35mm*31.75mm	250V/30A Fast-acting fuse			

Output Characteristics

Item	Conditions	Min.	Typ.	Max.	Unit
Operating Output Current Range	Vin=18V~27V	0		9.6	A
	Vin=27V~106V(include 27V)	0		15	A
Output Voltage Set Point	Total Vin range, Io=0	24.8	25.0	25.2	V
	Vin=18~27V, Io=9.6A	24.5	24.7	24.9	V
	Vin=27~106V, Io=15A	24.3	24.5	24.7	V
Output Voltage Ripple and Noise,	Full load, Vpp, 20MHz bandwidth		50	100	mV
	RMS		20	50	mV
Output Current Limit	Vin=24V	10	12	14	A
	Vin=36V, 48V, 72V, 80V	16	18.5	22	A
Current share accuracy	Vin=48V, 30A total, for each module		6	10	%
Start-up time(start _up time by Vin)	Vin= 48V(for A/B/C/D)		700	1000	mS
	Vin=72V(for A/B/C/D)		850	1200	mS
Start-up time(start _up time by Enable)	Vin= 48,72V(for C)		250	400	mS
Rise time			60	100	mS
Output Voltage Protection		27	30	34	V
Output Voltage Current Transient, positive and negative voltage step	Vin=24V, 4.8A to 7.2A, 0.1A/us slew rate		220	320	mV
	Vin=27~106V. 7.5A to 11.25A, 0.1A/us slew rate		220	320	mV
Maximum Output Capacitance	ESR>10mohm			2000	μF
Output overshoot				3	%
Efficiency @ 100% Load(9.6A)	Vin=24V	86.5	88.5		%
Efficiency @ 100% Load(15A)	Vin=36V	87.0	89.0		%
Efficiency @ 100% Load(15A)	Vin=48V	88.5	90.5		%
Efficiency @ 100% Load(15A)	Vin=72V,80V	90.0	92.0		%
Efficiency @ 60% Load(5.76A)	Vin=24V	86.5	88.5		%
Efficiency @ 60% Load(9A)	Vin=36V	88.0	90.0		%
Efficiency @ 60% Load(9A)	Vin=48V	89.0	91.0		%
Efficiency @ 60% Load(9A)	Vin=72V,80V	90.0	92.0		%

General Characteristics

Item	Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage,	Input to Output, Input to Case			2250	VDC
	Output to Case			550	VDC
Isolation Resistance, Input to Output		10			MΩ
Isolation Capacitance, Input to Output			7000		pF
Switching Frequency			160		KHz
MTBF	Ta=25°C, 80%load		0.675		Mhours
Weight			900		g

Environmental Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Storage Temperature Range		-40		+125	°C
Operating Temperature Range	Ambient Temperature	-40		+75	°C
Over Temperature Protection	NTC Temperature		118		°C
Humidity (non condensing)				95	% rel. H
Water Protection Level	For model P/N with suffix B			IP67	
Vibration	IEC 60068-2-6			10G/15~200HZ/3 PLANES	
Shock	IEC 60068-2-27			50G 3 PLANES	
Emission	EN12895			30-1000MHz 34-45dBuV/m	
Immunity	EN12895, EN61000-4-3			10V/m /27-1000MHz AM; 10V/m /900MHz PM	
ESD	EN12895, EN61000-4-2			Direct: ±2KV ±4KV; Air: ±2KV ±4KV ±8KV	

Notes

- Specifications typical at Ta=+25°C, nominal input voltage and rated full load output current unless otherwise noted.
- Specifications are subject to change without notice.

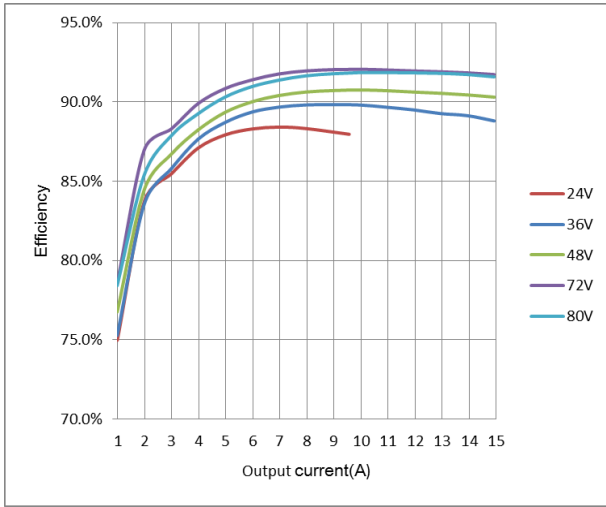


Figure 1: Efficiency vs. Output current
@ Vin=24V,36V,48V, 72V, 80V

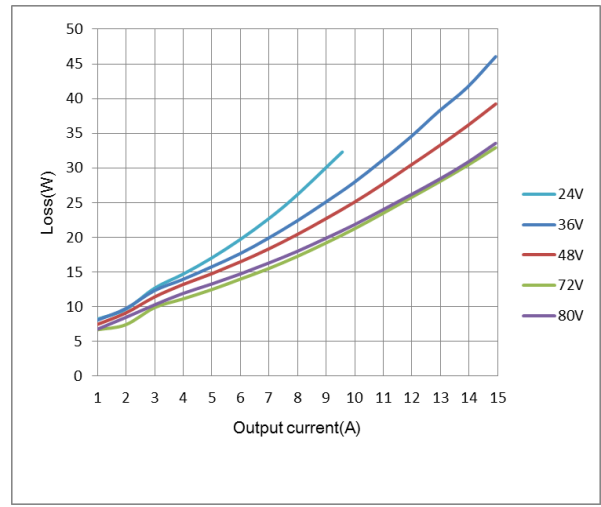


Figure 2: Loss vs. Output current
@ Vin=24V,36V,48V, 72V, 80V

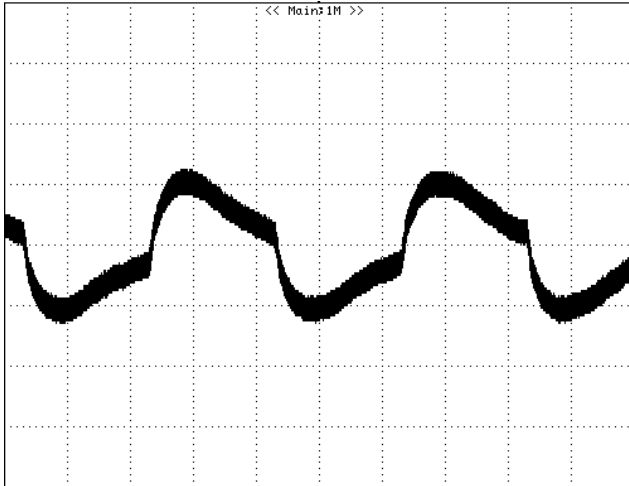


Figure 3: Dynamic response to load step 7.5A~11.25A with 0.1A/uS slew rate at 48Vin
CH1:VOUT, 200mV/div, 500uS/div

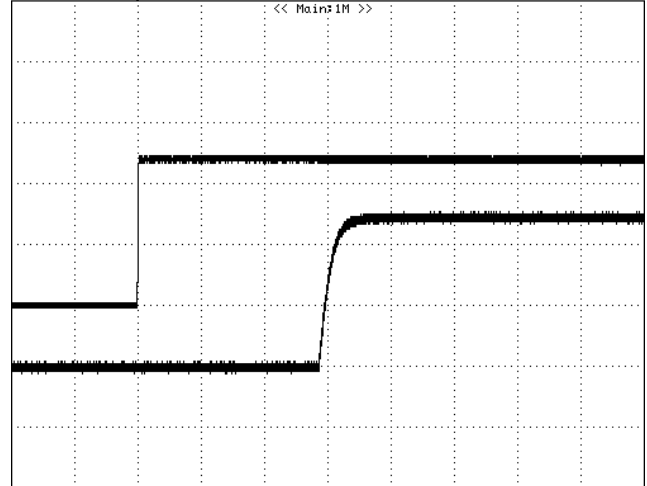


Figure 4: Vout start up with Vin on at 48Vin, 15A Iout,
TOP: VIN, 20V/div, 200mS/div
BOTTOM: VOUT, 10V/div, 200mS/div

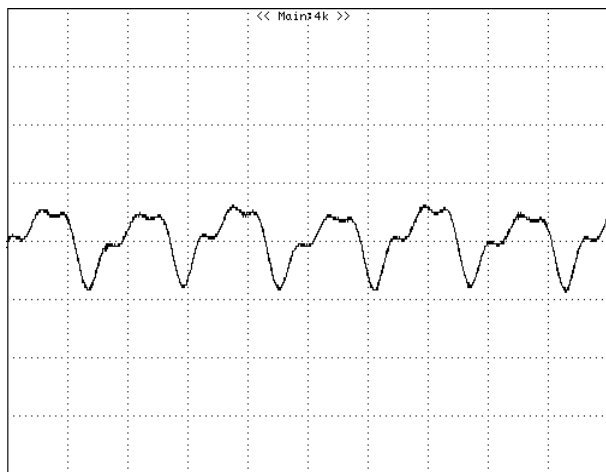


Figure 5: Output ripple & noise at 48Vin, 15A Iout
CH1:VOUT, 50mV/div, 2uS/div

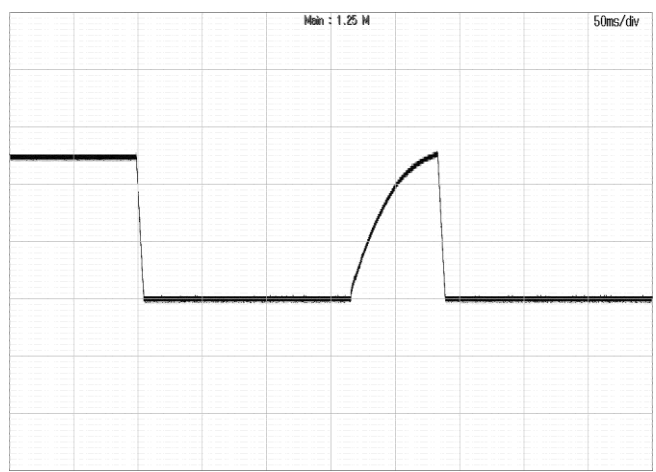


Figure 6: Output over voltage protection at 48Vin, 7.5A Iout
CH1:VOUT, 5V/div, 5mS/div

ELECTRICAL CURVES (continous)

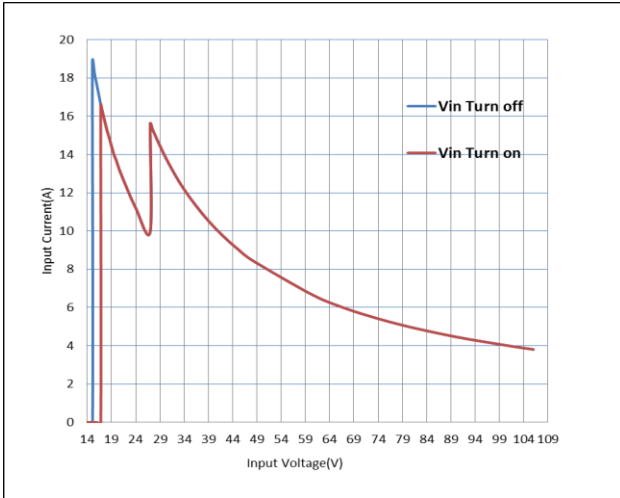


Figure 7: Input current vs. Input voltage
@ Vin=18V~27V, 240W; Vin=27V~106V, 360W

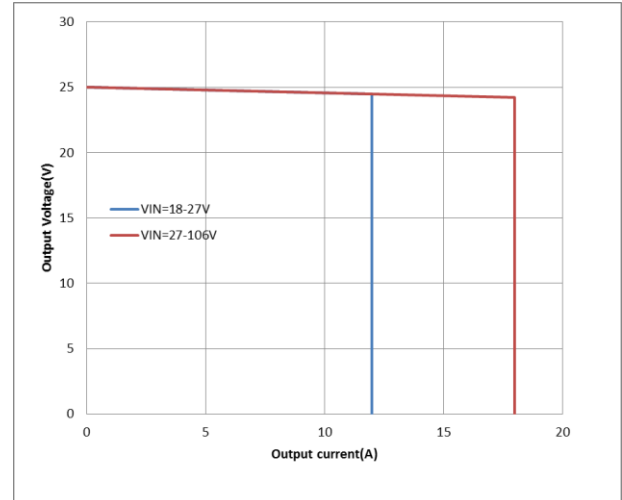


Figure 8: Output voltage vs. Output current
OCL Performance

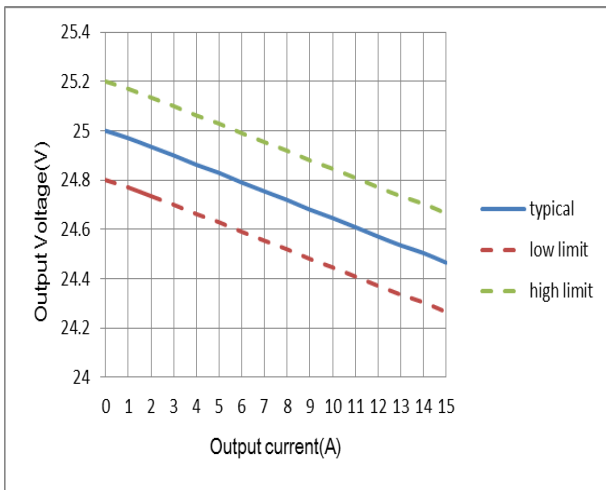


Figure 9: Output voltage vs. Output current
@ Vin=48V. Droop function.

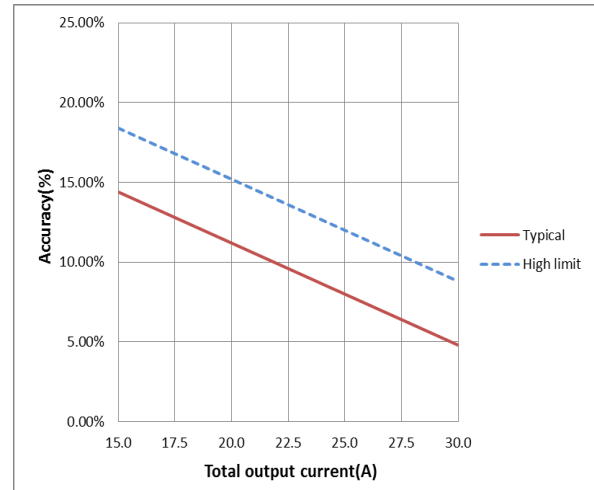


Figure 10: Current share accuracy vs. Total output current
2 in parallel.

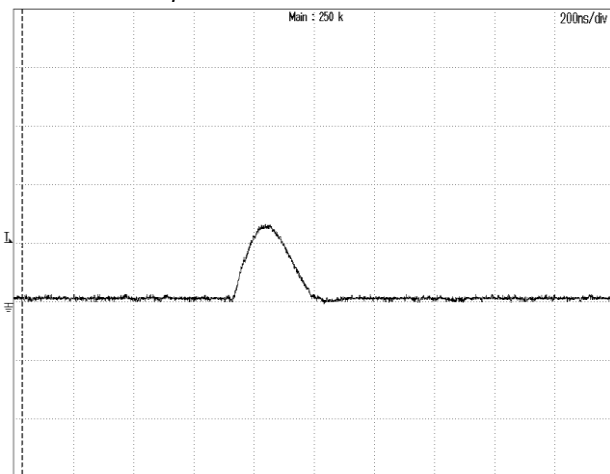


Figure 11: Inrush current @ Vin=48V CH1:lin, 2A/div,
200nS/div; Max current 2.7A, I_{2t}=1.24E-7 A²S

FEATURES DESCRIPTIONS

Output Over-Current Limit and Short Protection

The modules include internal output over-current limit (OCL) and short circuit protection (SCP) circuits, the OCL set point is lower than that of the SCP; The response of SCP circuit is much fast than that of the OCL circuit. The slowly increase of the output current will let module enter OCL protection when the current exceeds the OCL set point, while the fast increase of the output current will let module enter SCP when the current exceeds the SCP set point.

When the modules enter OCL protection, the output voltage will decrease while the output current is kept constant, the output voltage will soft start to set point when the overload condition is removed.

The module will enter hiccup mode when it triggers the SCP set point. The module will try to restart after shutdown. If the overload condition still exists, the module will shut down again. This restart trial will continue until the overload condition is removed.

Output Over-Voltage Protection

The power module includes an internal output over-voltage protection(OVP) circuit, which monitors the voltage on the output terminals. If this voltage exceeds the OVP set point, the module will shut down, and then restart after a fixed delay time (hiccup mode), please refer to figure6 for detail.

Over-Temperature Protection

The over-temperature protection consists of circuitry that provides protection from thermal damage. If the temperature exceeds the preset temperature threshold the module will shut down and enter into latch mode, and all components will not exceed their absolute maximum temperature ratings. The module will not recover until the input source is powered on again.

Remote On/Off

B62SR24015C has Enable control function. This Enable PIN is designed on the primary side of converter, the converter will turn on when the Enable PIN connected to VIN+, and turn off when the Enable PIN connected to VIN- or floating.

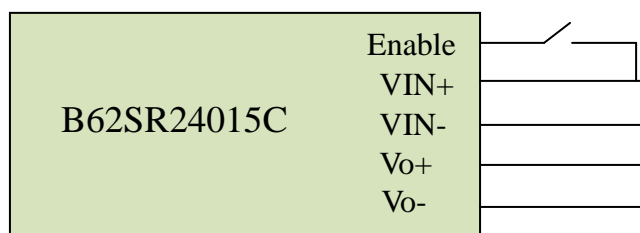


Figure 12: suggested Enable connection

Input Reverse Voltage Protection

The input reverse voltage protection is provided by an diode on the input line, the standoff voltage for the reverse protection shall be no less than -106V.

DESIGN CONSIDERATIONS

Parallel connection of multiple units

Two units parallel operation is verified, please contact Delta if more than two units need to be paralleled. While paralleling multiple units, the impedance of the cables from unit to junction point of each unit should be within $\pm 5\%$ of each other.

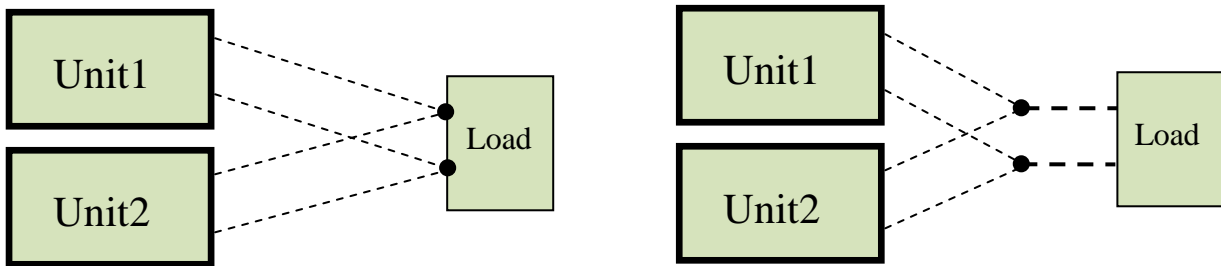


Figure 13: suggested parallel connections

EMC

The converter has the internal EMI filters and meet the EMC standards EN12895 30-1000MHz 34-45dBuV/m. The test result is showed as below

Conditions: $V_{in}=48V$, $I_o=15A$, 3m measure distance

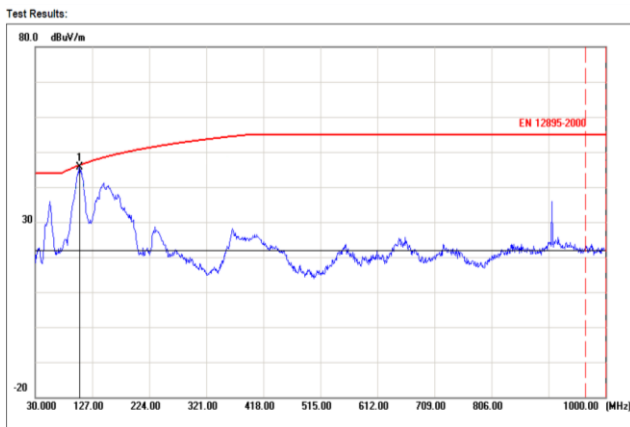


Figure 14: test result (Vertical)

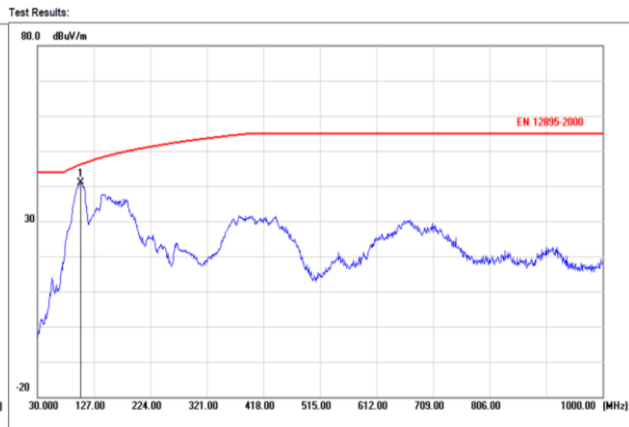


Figure 15: test result (Horizontal)

Fuse replacement

For the versions with the intergrated the fuse holder, when the fuse needs to be replaced, it can be taken down in an anticlockwise direction by slotted type screwdrivers .

Recommended fuse replacement P/N:

Littlefuse 0314030.MXP

THERMAL CONSIDERATION

The thermal curve (Figure17~21) is based on a 250x300x5 AL table, shown as below figure.

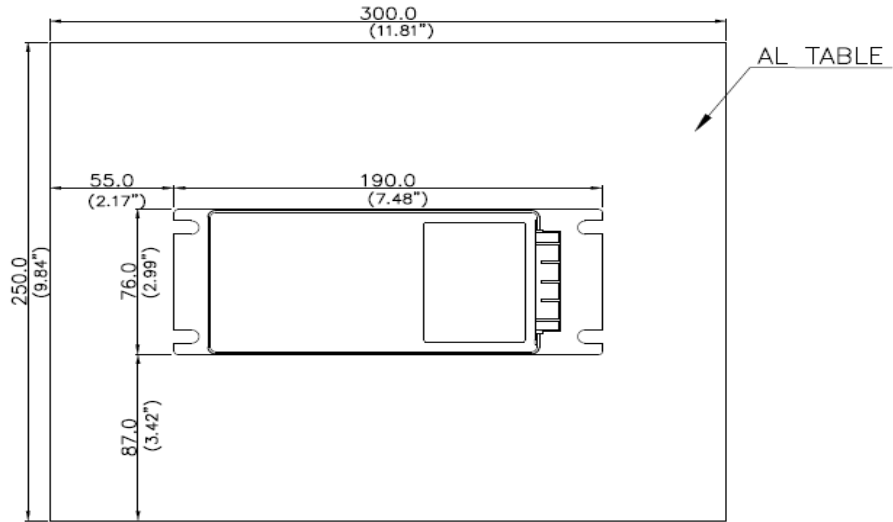


Figure 16: Thermal consideration

THERMAL CURVES

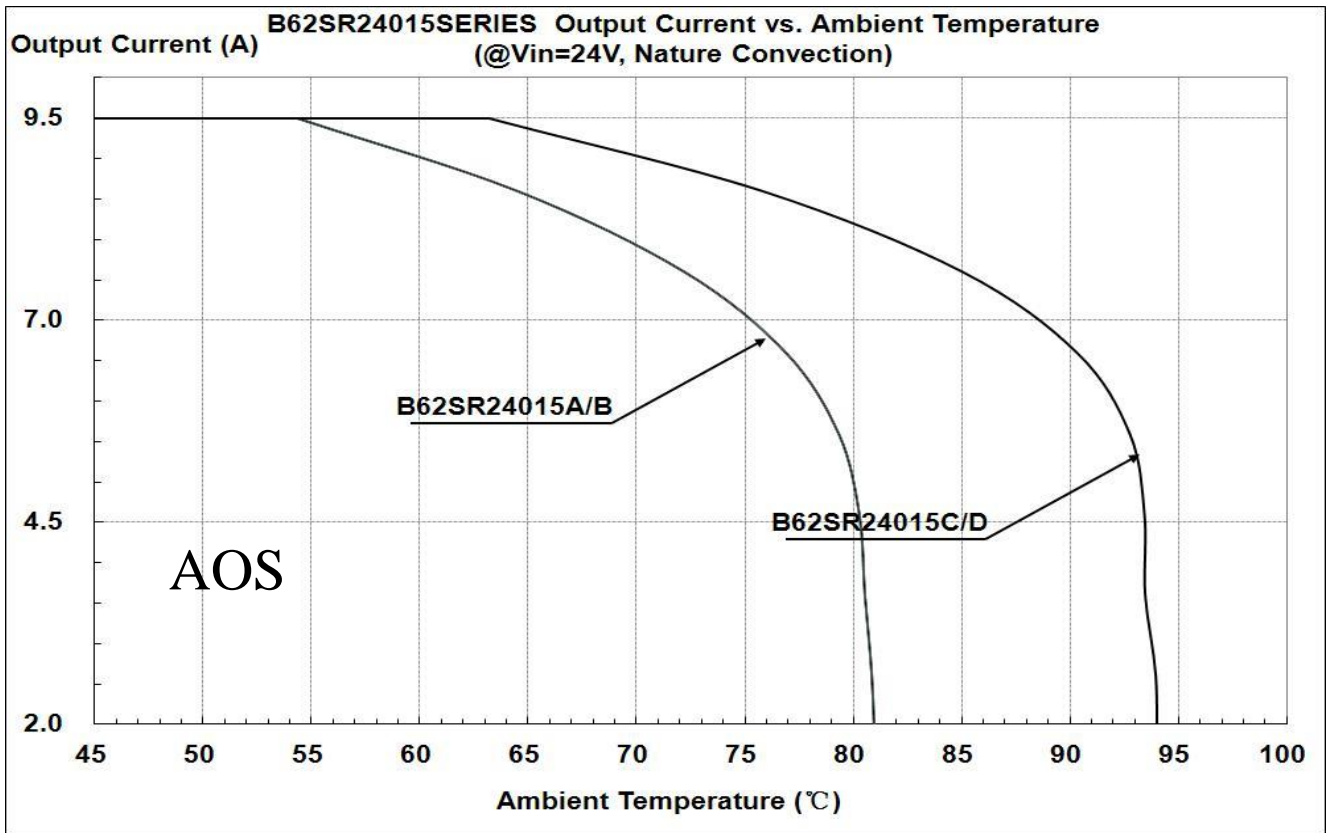


Figure 17: Output Current vs. Ambient temperature @ Vin=24V

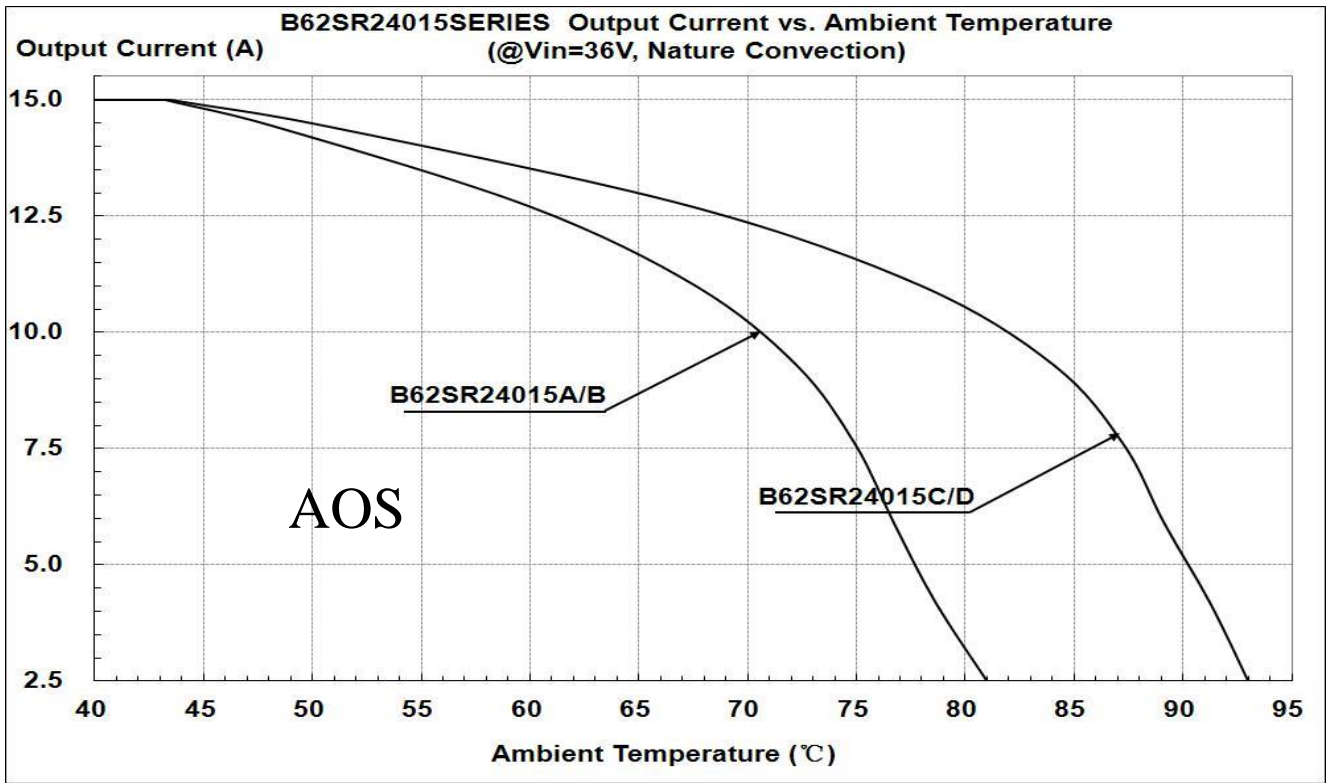


Figure 18: Output Current vs. Ambient temperature @ Vin=36V

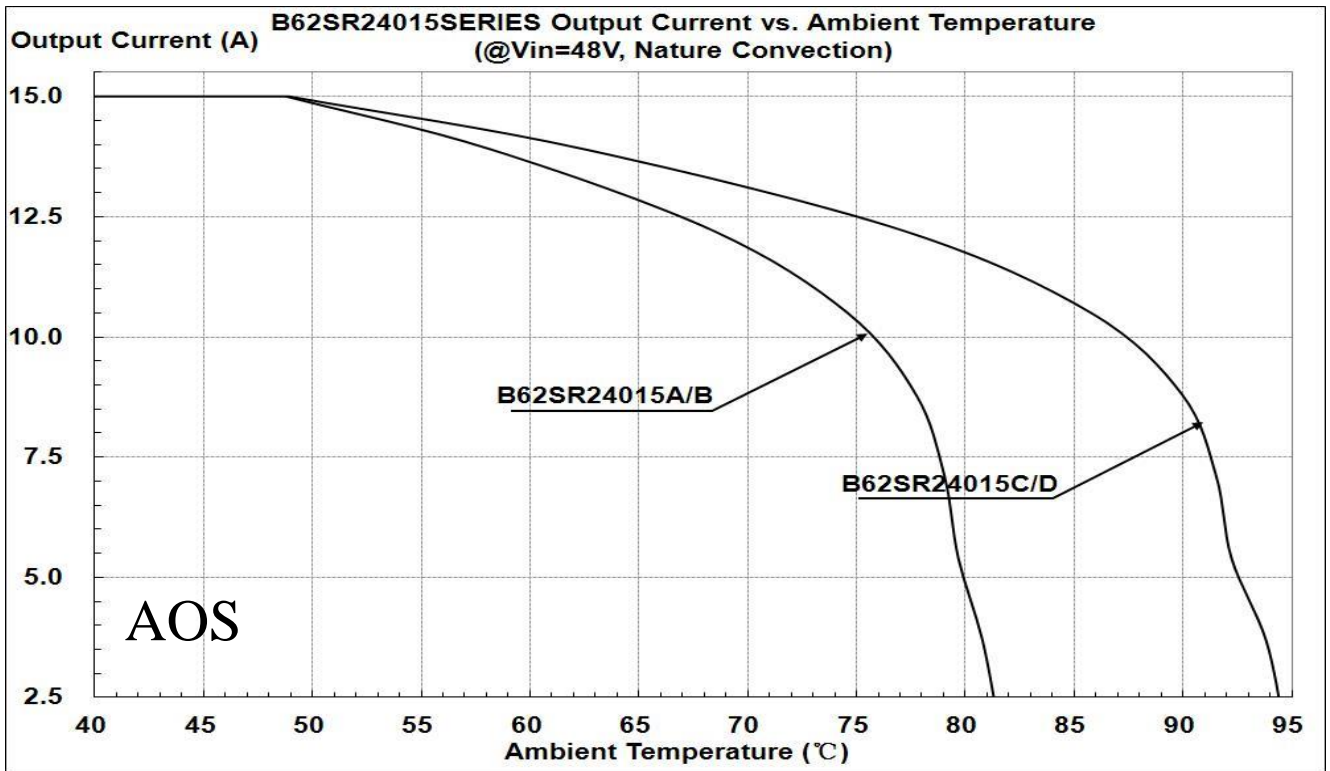


Figure 19: Output Current vs. Ambient temperature @ Vin=48V

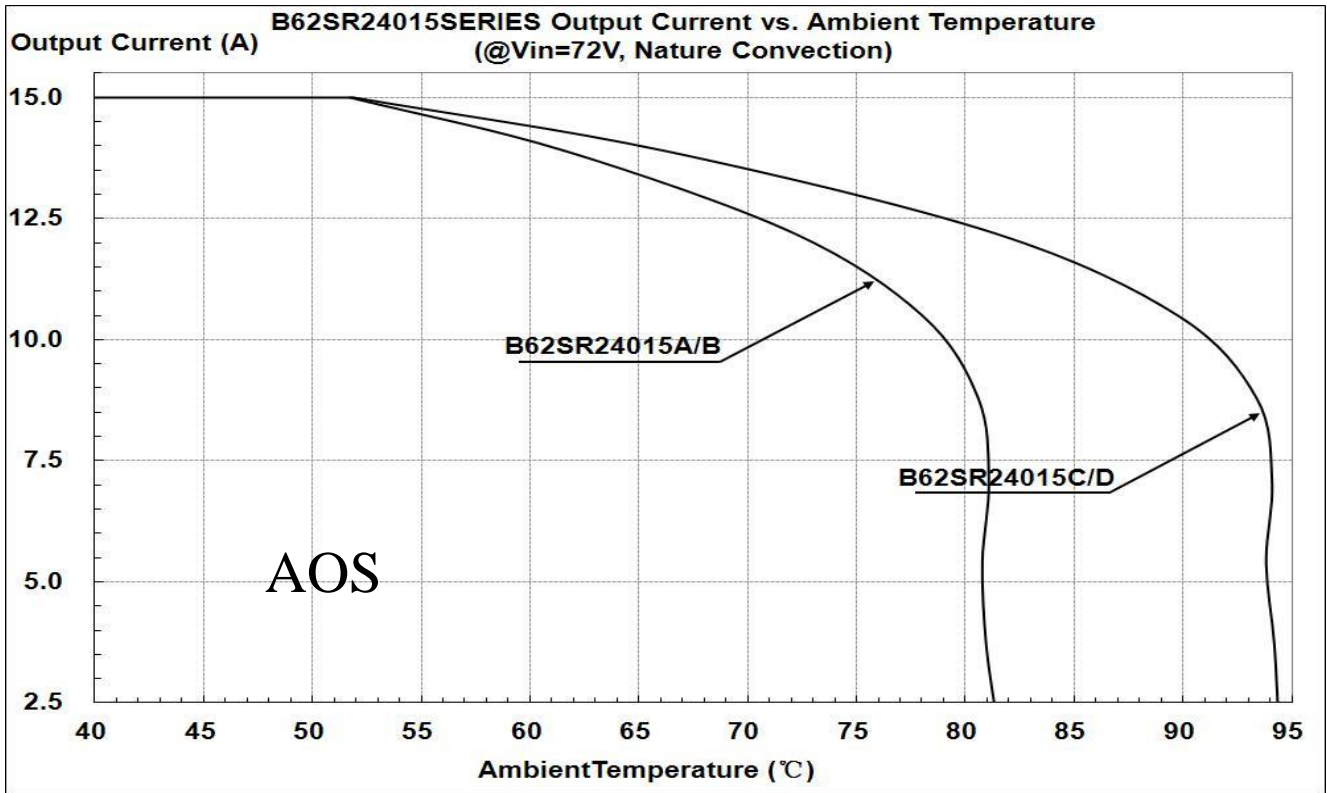


Figure 20: Output Current vs. Ambient temperature @ Vin=72V

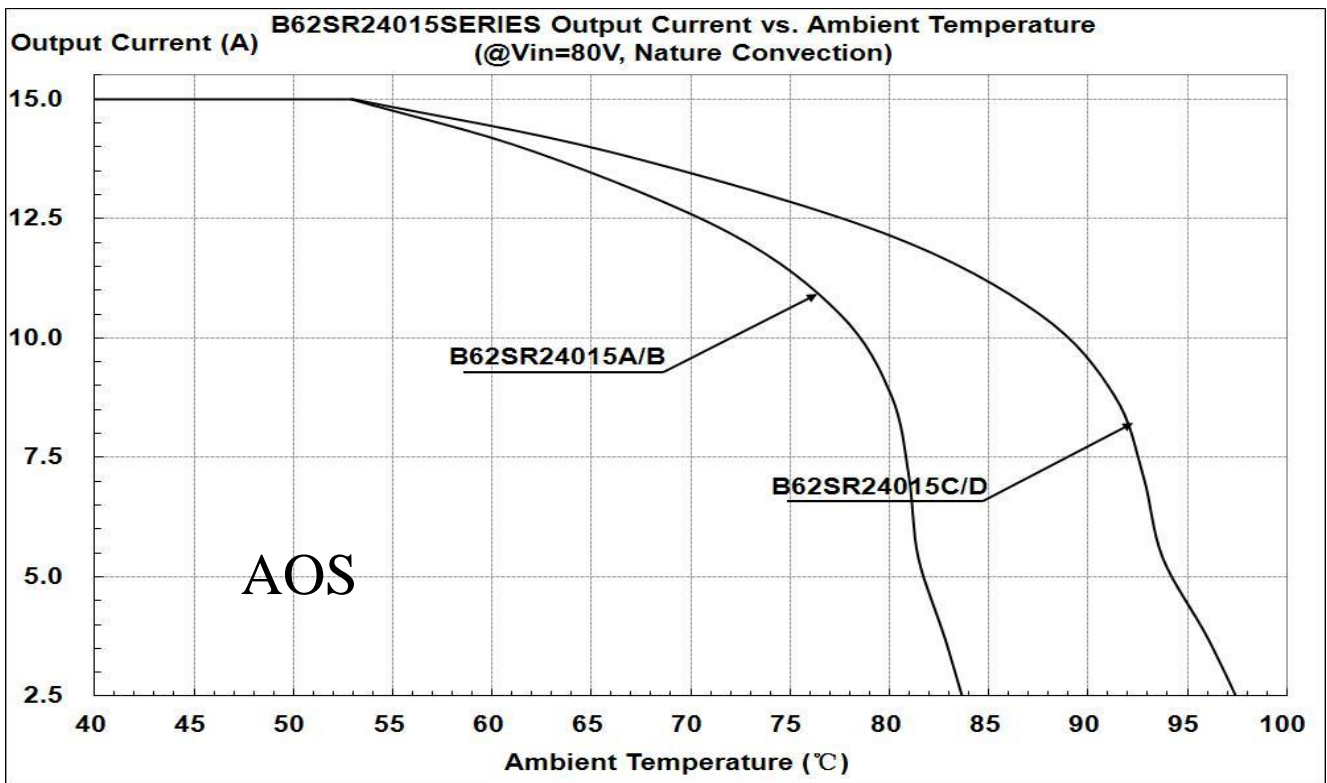


Figure 21: Output Current vs. Ambient temperature @ Vin=80V

THERMAL CONSIDERATION

The following figure shows the location to monitor the temperature of base plate. Before customer decides to use this DCDC converter, a thermal evaluation need to be done to make sure the temperature of base plate is lower than that read from below thermal curves (Figure23~27 base on different input voltage).

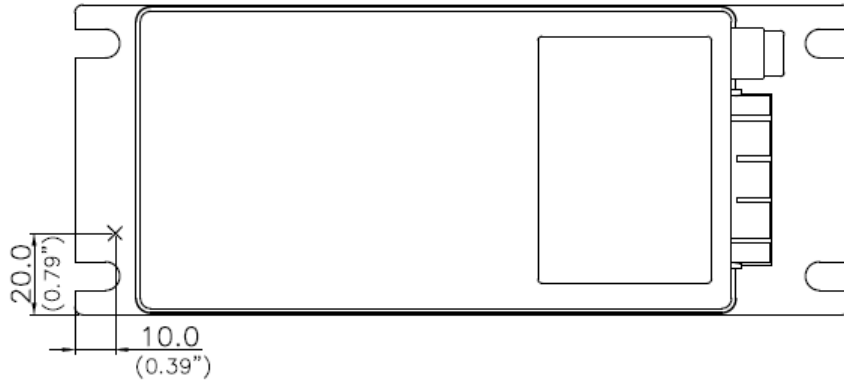


Figure 22: Thermal consideration

THERMAL CURVES

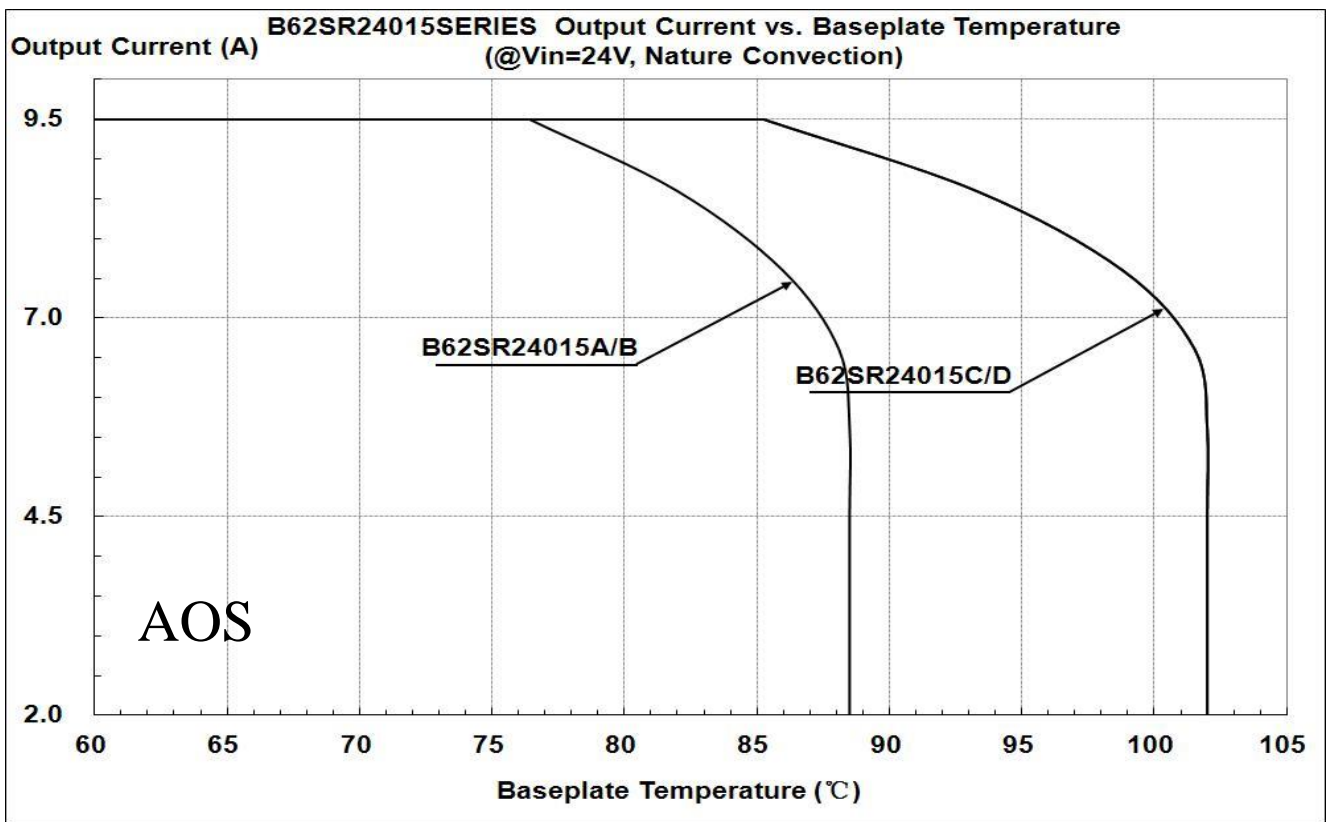


Figure 23: Output Current vs. Base Table temperature @ Vin=24V

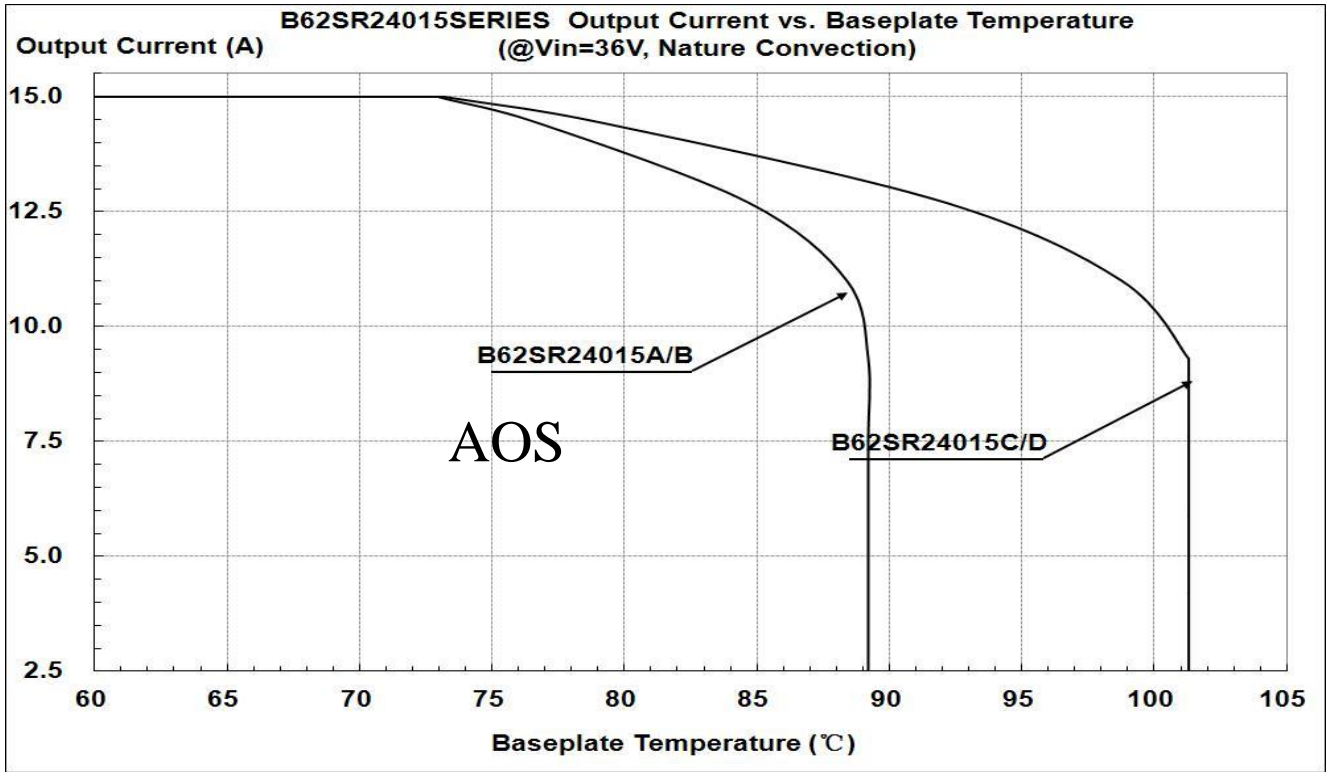


Figure 24: Output Current vs. Base Table temperature @ Vin=36V

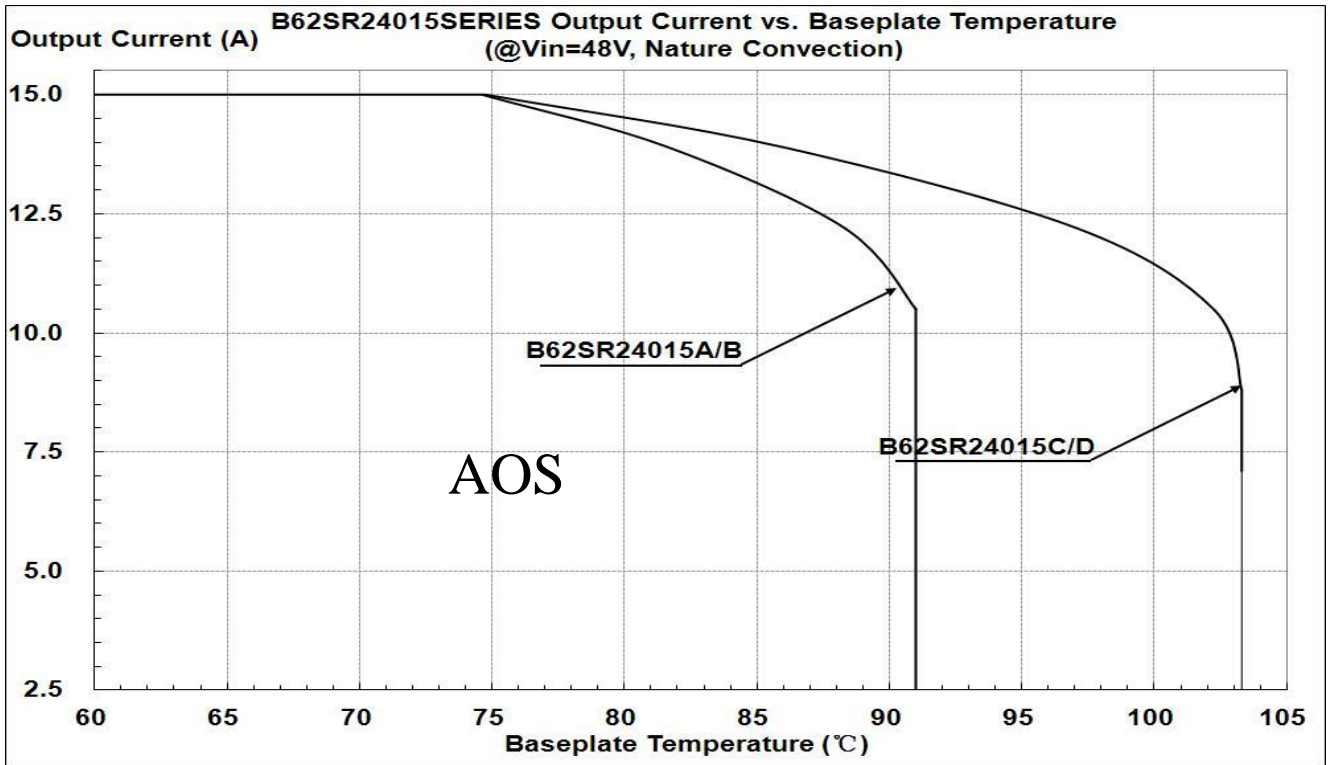


Figure 25: Output Current vs. Base Table temperature @ Vin=48V

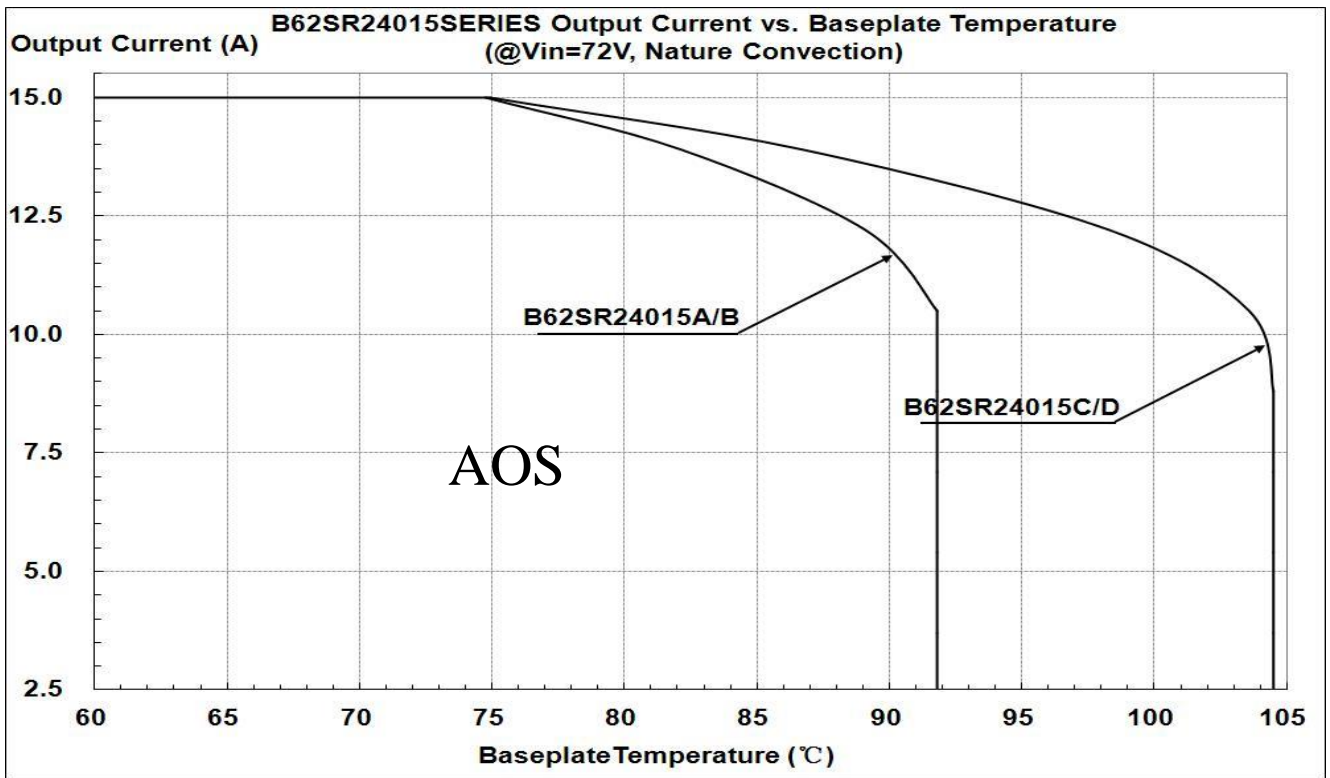


Figure 26: Output Current vs. Base Table temperature @ Vin=72V


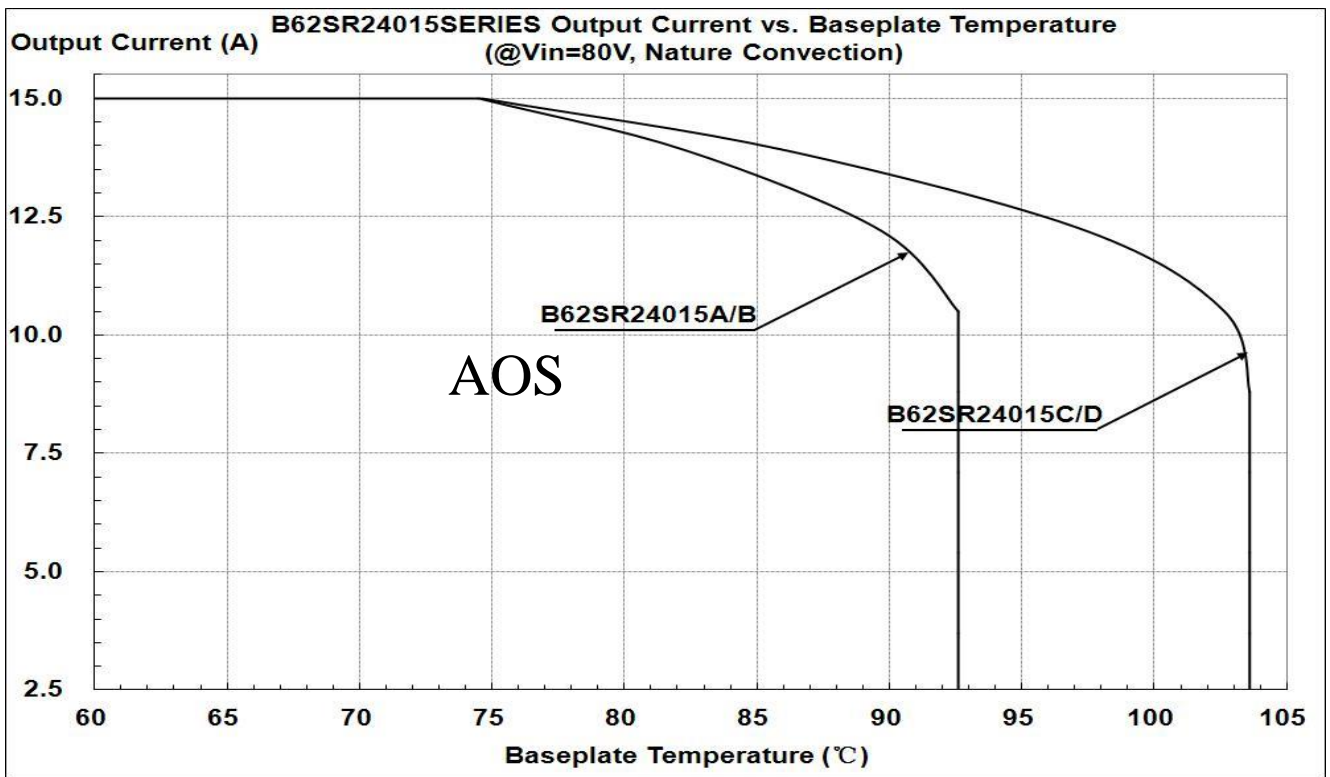



Figure 27: Output Current vs. Base Table temperature @ Vin=80V

Mechanical Drawing

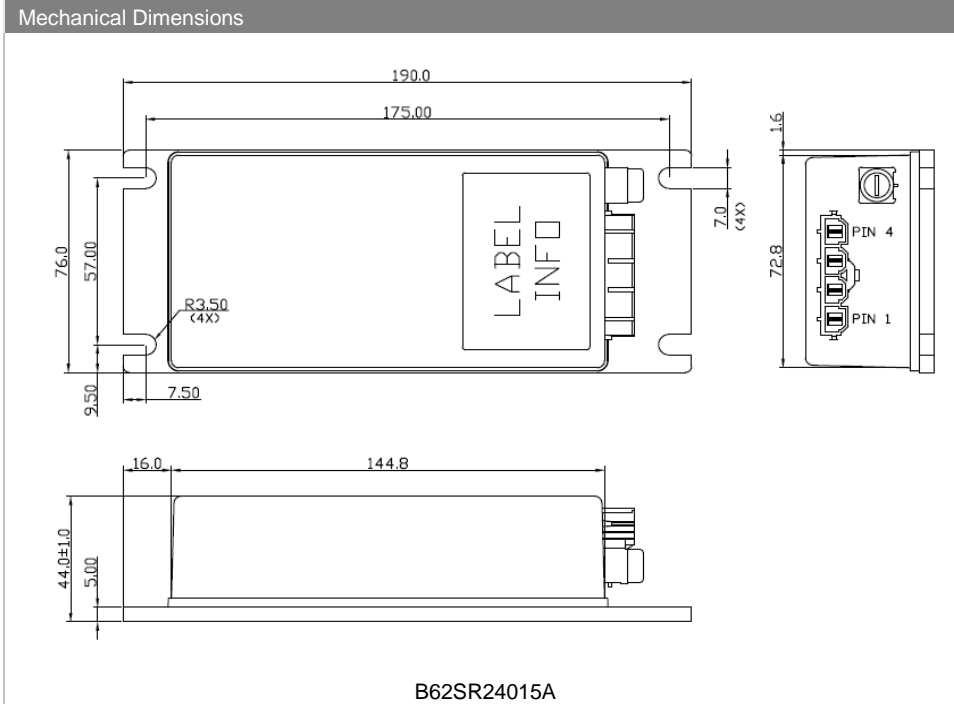

Pin Connections	
Pin	Function Description
1	OUTPUT -
2	OUTPUT +
3	INPUT -
4	INPUT +

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.010)
- Connector:
MOLEX MINI-FIT Sr™ Header
(MOLEX P/N :42819-4213)

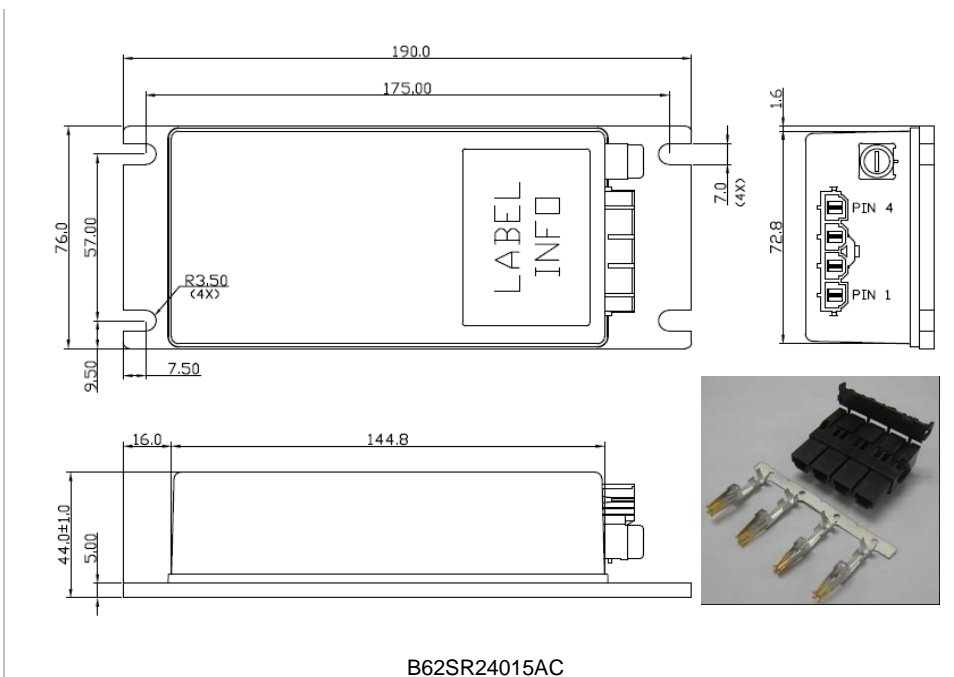


Pin	Function Description
1	OUTPUT -
2	OUTPUT +
3	INPUT -
4	INPUT +

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.010)
- Connector:
MOLEX MINI-FIT Sr™ Header
(MOLEX P/N :42819-4213)
- Connector kit :
Housing: 42816-0412
Terminal: 42815-0042

Mechanical Drawing


Mechanical Dimensions

Pin Connections

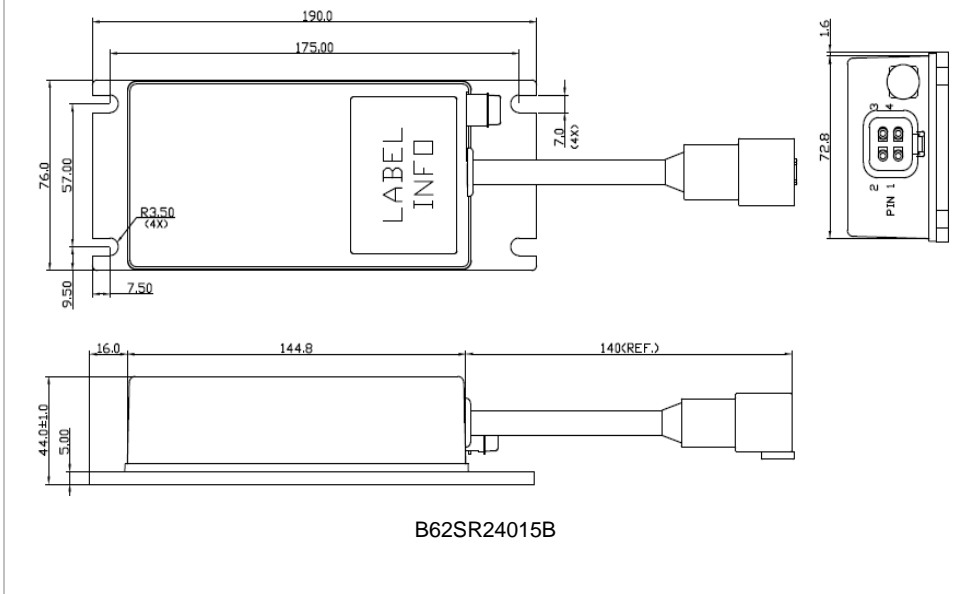

Pin	Function Description
1	OUTPUT -
2	OUTPUT +
3	INPUT -
4	INPUT +


- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.010)
- Connector:
Deutsch DTP Receptacles
(DEUTSCH P/N :DTP04-4P)

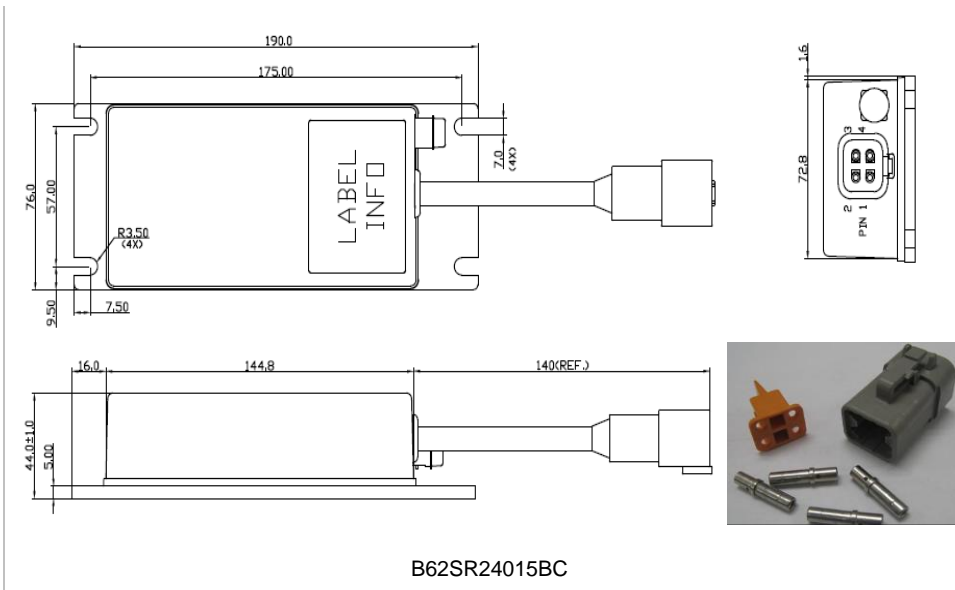


Pin	Function Description
1	OUTPUT -
2	OUTPUT +
3	INPUT -
4	INPUT +


- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.010)
- Connector:
Deutsch DTP Receptacles
(DEUTSCH P/N :DTP04-4P)
- Connector kit :
Housing: DTP06-4S
Wedge lock: WP-4S
Terminal: 0462-203-12141


Mechanical Drawing

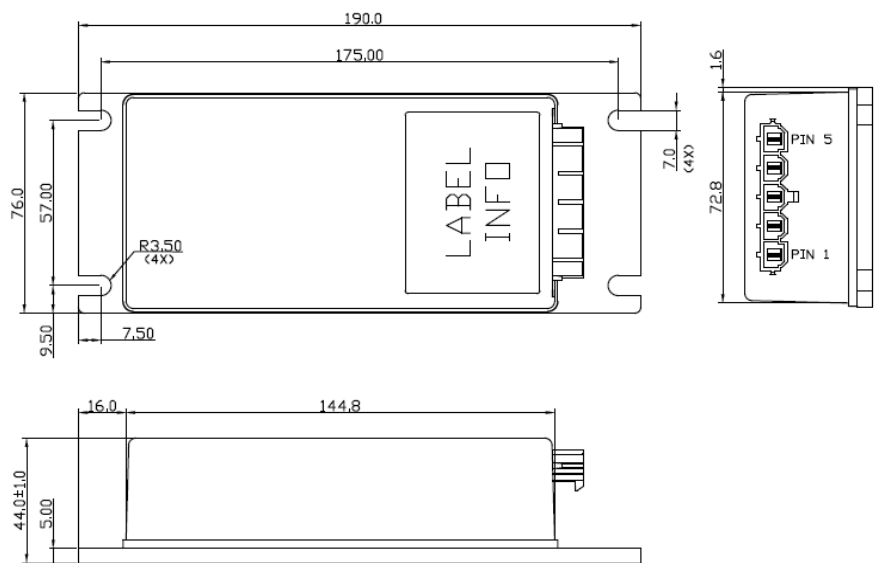Mechanical Dimensions		Pin Connections	
		Pin	Function Description
		1	OUTPUT -
		2	OUTPUT +
		3	INPUT -
		4	INPUT +
5	ENABLE		
		<ul style="list-style-type: none"> ➤ All dimensions in mm (inches) ➤ Tolerance: X.X±0.5 (X.XX±0.02) X.XX±0.25 (X.XXX±0.010) ➤ Connector: MOLEX MINI-FIT Sr™ Header (MOLEX P/N :42819-5213) 	
B62SR24015C			

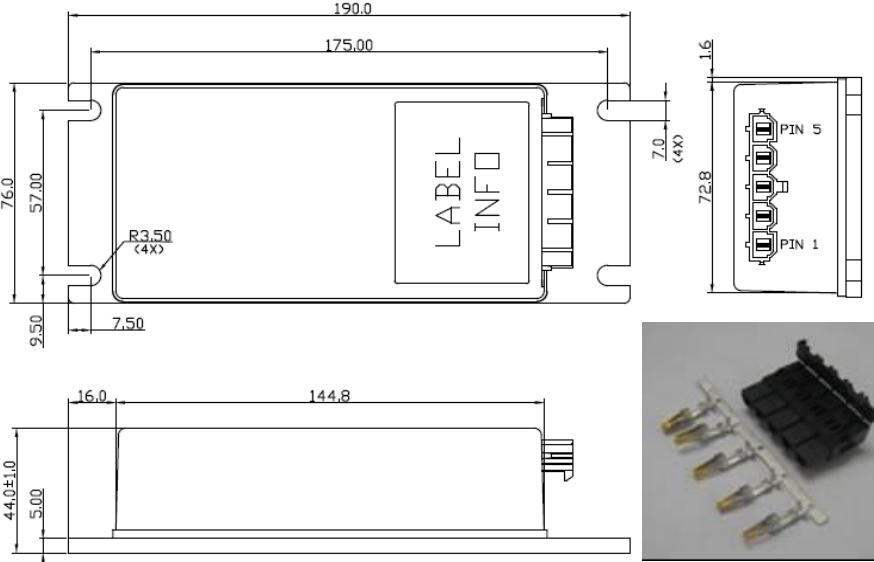		Pin	Function Description
		1	OUTPUT -
		2	OUTPUT +
		3	INPUT -
		4	INPUT +
5	ENABLE		
		<ul style="list-style-type: none"> ➤ All dimensions in mm (inches) ➤ Tolerance: X.X±0.5 (X.XX±0.02) X.XX±0.25 (X.XXX±0.010) ➤ Connector: MOLEX MINI-FIT Sr™ Header (MOLEX P/N :42819-5213) ➤ Connector kit : Housing: 42816-0512 Terminal: 42815-0042 	
B62SR24015CC			

Mechanical Drawing

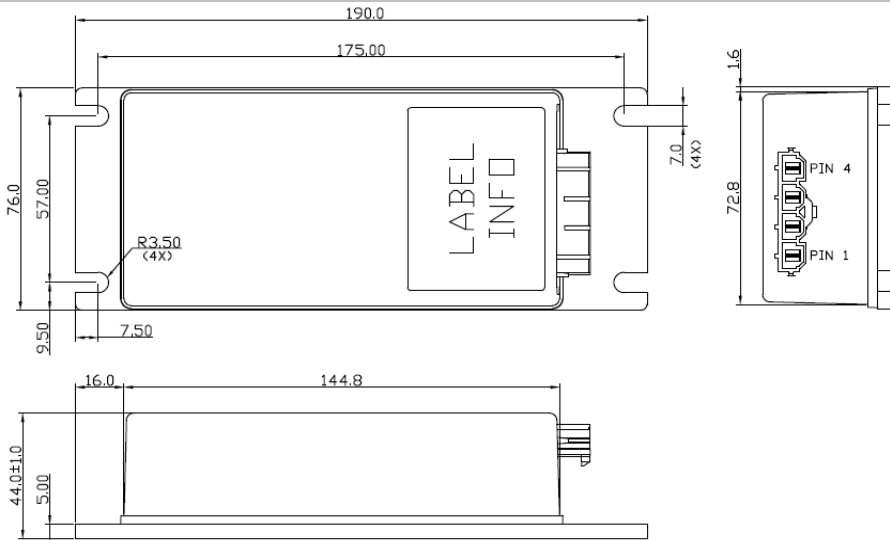Mechanical Dimensions		Pin Connections	
		Pin	Function Description
		1	OUTPUT -
		2	OUTPUT +
		3	INPUT -
		4	INPUT +
		<ul style="list-style-type: none"> ➤ All dimensions in mm (inches) ➤ Tolerance: X.X±0.5 (X.XX±0.02) X.XX±0.25 (X.XXX±0.010) ➤ Connector: MOLEX MINI-FIT Sr™ Header (MOLEX P/N :42819-4213) 	
B62SR24015D			

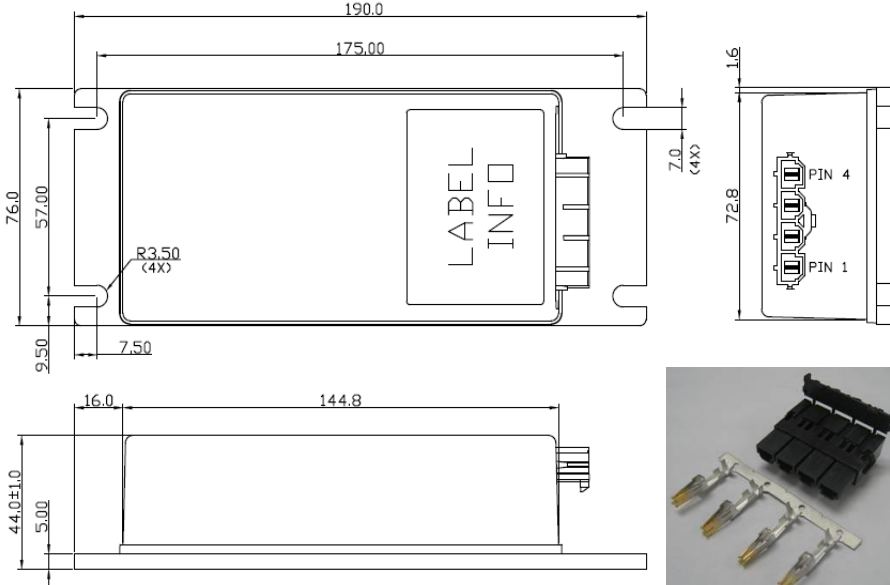		Pin	Function Description
		1	OUTPUT -
		2	OUTPUT +
		3	INPUT -
		4	INPUT +
		<ul style="list-style-type: none"> ➤ All dimensions in mm (inches) ➤ Tolerance: X.X±0.5 (X.XX±0.02) X.XX±0.25 (X.XXX±0.010) ➤ Connector: MOLEX MINI-FIT Sr™ Header (MOLEX P/N :42819-4213) ➤ Connector kit : Housing: 42816-0412 Terminal: 42815-0042 	
B62SR24015DC			

Physical Outline

Case Size	: 190.0x76.0x44.0 mm (7.48"x2.99"x1.73")
Case Material	: Case: PC; Plate: AL6063



Part Numbering System

B	62	S	R	24	015	A			C	
Form Factor	Input Voltage	Number of Outputs	Product Series	Output Voltage	Output Current	Option Code			Option Fitting	
B – Box	62 – 18V~106V	S – Single	R – Regular	24 – 24V	015 – 15A		With Built-in fuse holder	Enable pin	Sealed connector	Connector Kit
						A	YES	NO	NO	1xhousing+ 4 terminals
						B	YES	NO	YES	1xhousing+ 4 terminals
						C	NO	YES	NO	1xhousing+ 5 terminals
D	NO	NO	NO	1xhousing+ 4 terminals						

Model List

Input Voltage Range	Input		Output		EFF @48VIN 100% LOAD
B62SR24015(A B C D)	18V~106V	16A	24.5V	15A	90.5%

CONTACT: www.deltaww.com/dcdc

Email: dcdc@deltaww.com

USA:

Telephone:
East Coast: 978-656-3993
West Coast: 510-668-5100
Fax: (978) 656 3964

Europe:

Phone: +31-20-655-0967
Fax: +31-20-655-0999

Asia & the rest of world:

Telephone: +886 3 4526107
ext 6220~6224
Fax: +886 3 4513485

WARRANTY

Delta offers a two (2) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters - Chassis Mount](#) category:

Click to view products by [Delta](#) manufacturer:

Other Similar products are found below :

[RPS8-350ATX-XE](#) [AK-1615-7R](#) [EBC4050N042N75](#) [FK1601-7RT](#) [AM3040-9G](#) [BQ2660-9RF](#) [B62SR24125CC](#) [B40SR12424CC](#)
[VTD24SC24-O](#) [VTB05SC110-O](#) [B62SR13722AC](#) [TMDC 20-4811](#) [TMDC 20-4815](#) [TMDC 40-2411](#) [TMDC 40-4811](#) [TMDC 60-2411](#)
[TMDC 60-4815](#) [RSD-300D-5](#) [STMGFS152412](#) [TMDC 20-2411](#) [TMDC 20-2412](#) [TMDC 20-2418](#) [TMDC 60-4811](#) [TMDC 60-4812](#) [TMDC](#)
[60-4818](#) [VHK150W-Q24-S48](#) [EQ2001-9RG](#) [SD-100A-12](#) [RSD-30G-3.3](#) [RSD-30H-3.3](#) [RSD-30H-5](#) [RSD-30L-3.3](#) [RSD-30L-5](#) [RSD-60G-5](#)
[RSD-60H-24](#) [RSD-60H-3.3](#) [RSD-60H-5](#) [RSD-30G-5](#) [VHK200W-Q24-S12](#) [RSD-60L-5](#) [MGFS32412](#) [VHK150W-Q24-S12](#) [TEQ 300-](#)
[7216WIR](#) [MGFS32415](#) [MGFS3243R3](#) [PS8-250ATX-ZE](#) [RPS8-750ATX-XE](#) [PS8-300ATX-ZBE](#) [RPM40-2412DG](#) [TEQ 300-7215WIR](#)