


Internal door mount

# HEX010VA series



Dimension drawing

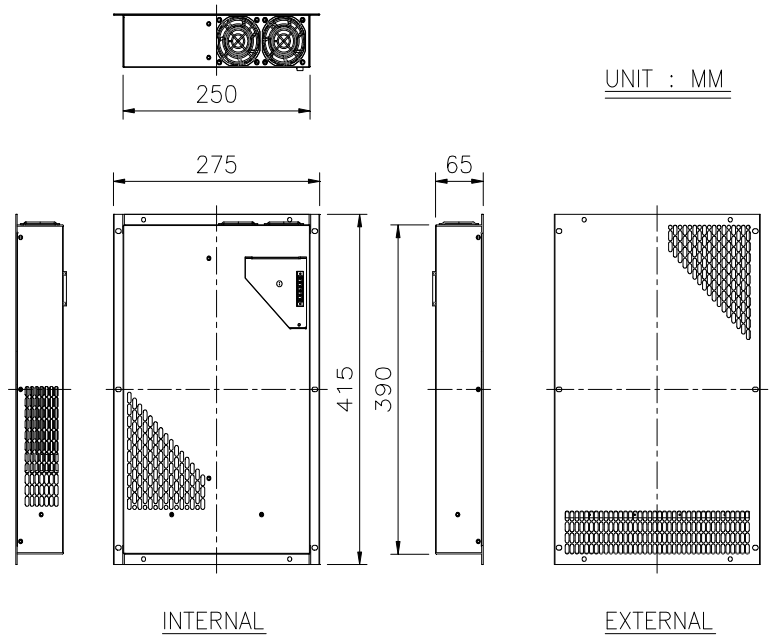

Features

- ◆ IP55 waterproof at external side
- ◆ Dry contact alarm output

Design

- ◆ Air to air heat exchange
- ◆ Rated voltage at 24V
- ◆ Redundant fan quantity design
- ◆ High efficiency and reliable fan
- ◆ Easy installation and maintenance

Main feature	Unit	Specification
Dimension (H x W x D)	mm (inch)	415 x 275 x 65 (16 x 11 x 2.6)
Cooling capacity* <sub>Note</sub>	W/K (W/°F)	10 (6)
Rated voltage	VDC	24
Operating current	A	1.2
Operating power	W	29
Operating voltage range	VDC	20 ~ 26
Operating temperature range	°C	-10 ~ +65
Noise (1.5 meter)	dB-A	61.0
Weight	Kg (Lb)	4 (9)

\* Note : The cooling capacity (W/K , W/°C or W/°F) is defined as  $Q / (T_I - T_A)$

Q : Heat dissipation (W) from inside of cabinet

T<sub>I</sub> : Return temperature of internal air circuit (K , °C or °F)

T<sub>A</sub> : Ambient temperature of external air circuit (K , °C or °F)

\* Specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Racks & Rack Cabinet Accessories](#) category:*

*Click to view products by [Delta](#) manufacturer:*

Other Similar products are found below :

[M00-PLN](#) [F2420](#) [F2424](#) [8310-1032-SS](#) [9104](#) [PLFF2000](#) [PLFF6000](#) [GP216](#) [PTFA60000LG](#) [H-9163-B](#) [HEH050BA](#) [1427C3](#) [BAS-5104](#) [N-700-2](#) [190-002](#) [HTL10](#) [HTS10](#) [PC-118](#) [PC-780L](#) [PC-79](#) [PC-800](#) [SC4-28](#) [F3024](#) [AKWAMT](#) [PLFF1000](#) [CG3-340S/12](#) [2CWDP36](#) [2CWDP48](#) [2SSHINGE](#) [CP-001BK](#) [CPL19431LG1](#) [R570-004-107](#) [M6123-4007-SS](#) [TS170](#) [531300535](#) [BRX-12290](#) [C4BD3077SBK1](#) [UPS](#) [7-17-14](#) [PLAIN](#) [LP40](#) [5261304-07](#) [CCA26-44-01](#) [706-102](#) [CG3-160G](#) [7112C-PLN](#) [ALUM](#) [CM10](#) [TS81](#) [7142](#) [GP134](#) [M6127-4007-SS](#) [PBCOVER](#)