Roof mount

HEX050QA series

Dimension drawing


EXTERNAL INLET

434.0

550.0   155.0
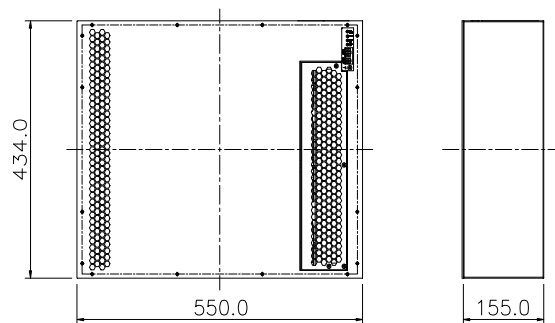
INTERNAL SIDE

UNIT : MM

EXTERNAL OUTLET

Features

◆ **IP55 waterproof at external side**

◆ **"One touch" dry run test and dust cleaning**

◆ **Standalone temperature control**

◆ **Clear LED status indicator**

◆ **Dry contact alarm output**

Design

◆ **Air to air heat exchange**

◆ **Rated voltage at 48V**

◆ **Reduntant fan quantity design**

◆ **High efficiency and reliable fan**

◆ **Easy installation and maintenance**

Main feature	Unit	Specification
Dimension (W x D x H)	mm (in)	550 x 434 x 155 (22 x 17 x 6)
Cooling capacity·Note	W/K (W/℉)	50 (28)
Rated voltage	VDC	48
Operating current	A	1.4
Opearting power	W	68
Operating voltage range	VDC	40 ~ 60
Operating temperature range	°C	-10 ~ +65
Noise (1.5 meter)	dB-A	64.0
Weight	Kg (Lb)	9 (20)

* Note : The cooling capacity (W/K , W/°C or W/℉) is defined as Q/ (TI-TA)

    Q : Heat dissipation (W) from inside of cabinet

    TI : Return temperature of internal air circuit (K , °C or ℉)

    TA : Ambient temperature of external air circuit (K , °C or ℉)

* Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Racks & Rack Cabinet Accessories *category:*

Click to view products by Delta *manufacturer:*

Other Similar products are found below :

M00-PLN F2420 F2424 8310-1032-SS 9104 PLFF2000 PLFF6000 GP216 PTFA60000LG H-9163-B HEH050BA 1427C3 BAS-5104 N-700-2 190-002 HTL10 HTS10 PC-118 PC-780L PC-79 PC-800 SC4-28 F3024 AKWAMT PLFF1000 CG3-340S/12 2CWDP36 2CWDP48 2SSHINGE CP-001BK CPL19431LG1 R570-004-107 M6123-4007-SS TS170 531300535 BRX-12290 C4BD3077SBK1 UPS 7-17-14 PLAIN LP40 5261304-07 CCA26-44-01 706-102 CG3-160G 7112C-PLN ALUM CM10 TS81 7142 GP134 M6127-4007-SS PBCOVER