

Door Mounting type



Features


- ♦ IP55 waterproof at external side
- ◆ "One touch" dry run test and dust cleaning
- Optional communication function design
- Easy installation and maintenance from internal side
- ♦ Clear LED status indicator
- High efficiency and reliable fan modules

Design

- Air to air heat exchange
- Door mounted
- ◆ Rated voltage at 48V
- Complete airtight design for outdoor application
- ◆ Drainage hole in the bottom
- Reduntant fan quantity design

HEX100PC series

Dimension drawing

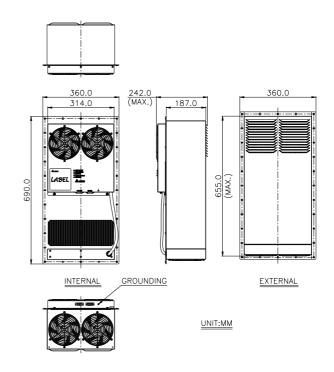

Main feature	Unit	Specification
Dimension (H x W x D)	mm	690 x 360 x 242
Cooling capacity	W/K	100 (MAX.) *Note
Rated voltage	Vdc	48 (TYP.)
Operating voltage range	Vdc	40 ~ 60
Rated current	Α	3.75 (MAX.)
Power consumption	W	180.0 (MAX.)
Operating temperature range	°C	-10 ~ +65
Internal airflow	CFM	360
External airflow	CFM	325
Weight	Kg	12.5

* Note : The cooling capacity (W/K OR W/°C) is defined as Q/ (T_I-T_A)

Q : Heat dissipation (W) from inside of cabinet

T_I: Return temperature of internal air circuit (K OR °C)

T_A: Ambient temperature of external air circuit (K OR °C)

* Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Racks & Rack Cabinet Accessories category:

Click to view products by Delta manufacturer:

Other Similar products are found below:

M00-PLN F2420 F2424 8310-1032-SS 9104 PLFF2000 PLFF6000 GP216 PTFA60000LG H-9163-B HEH050BA 1427C3 BAS-5104 N-700-2 190-002 HTL10 HTS10 PC-118 PC-780L PC-79 PC-800 SC4-28 F3024 AKWAMT PLFF1000 CG3-340S/12 2CWDP36 2CWDP48 2SSHINGE CP-001BK CPL19431LG1 R570-004-107 M6123-4007-SS TS170 531300535 BRX-12290 C4BD3077SBK1 UPS 7-17-14 PLAIN LP40 5261304-07 CCA26-44-01 706-102 CG3-160G 7112C-PLN ALUM CM10 TS81 7142 GP134 M6127-4007-SS PBCOVER