


## Internal door mount



## HEX150PB series

### Dimension drawing

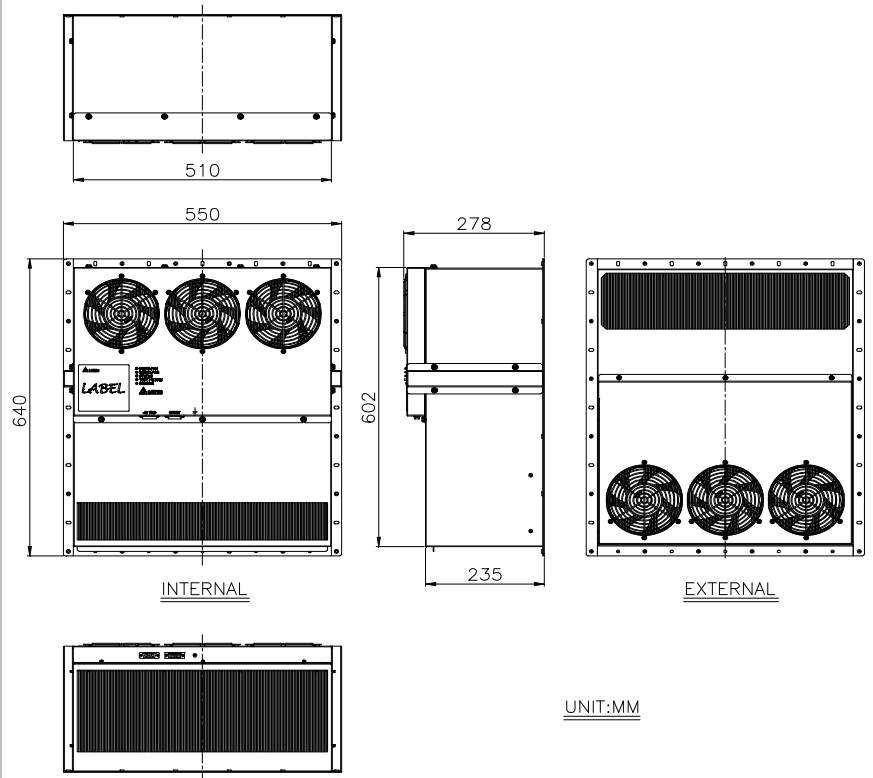

### Features

- ◆ IP55 waterproof at external side
- ◆ "One touch" dry run test and dust cleaning
- ◆ Standalone temperature control
- ◆ Clear LED status indicator
- ◆ Dry contact alarm output

### Design

- ◆ Air to air heat exchange
- ◆ Rated voltage at 48V
- ◆ Redundant fan quantity design
- ◆ High efficiency and reliable fan
- ◆ Easy installation and maintenance

Main feature	Unit	Specification	
Dimension (H x W x D)	mm (inch)	640 x 550 x 278 (25 x 22 x 11)	
Cooling capacity <sup>*Note</sup>	W/K (W/°F)	110 (61)	150 (83)
Rated voltage	VDC	48	
Operating current	A	2.6	5.8
Operating power	W	125	279
Operating voltage range	VDC	40 ~ 60	
Operating temperature range	°C	-10 ~ +65	
Noise (1.5 meter)	dB-A	65.0	73.0
Weight	Kg (Lb)	20 (44)	

\* Note : The cooling capacity (W/K , W/°C or W/°F) is defined as  $Q / (T_I - T_A)$

Q : Heat dissipation (W) from inside of cabinet

T<sub>I</sub> : Return temperature of internal air circuit (K , °C or °F)

T<sub>A</sub> : Ambient temperature of external air circuit (K , °C or °F)

\* Specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thermoelectric Assemblies](#) category:*

*Click to view products by [Delta](#) manufacturer:*

Other Similar products are found below :

[C3400-154](#) [HEX020VA](#) [HEX150PC](#) [HEX160PA](#) [HEX200PC](#) [HEX150PB](#) [HEX120PA](#) [HEX060PA](#) [HEX080PD](#) [HEX200PB](#) [HEX050QA](#)  
[HEX050PA](#) [371061,01](#) [MBS HH](#) [TEMA-AA-50-12](#) [TEMA-AP-40-12](#) [TEMA-AP-80-24](#) [DA-044-12-02-00-00](#) [387000866](#) [DA-044-24-02-00-00](#) [387000919](#) [TC-18-QC-50](#) [AA-060-24-22-00-00](#) [DA-020-12-02-00-00](#) [AAC050-24-22-00-00](#) [AA-070-24-22-00-00](#) [TC-18-QE-50](#) [LA-045-12-02-00-00](#) [DA-024-12-02-00-00](#) [WL 500](#) [AA-026-12-22-00-00](#) [DA-033-12-02-00-00](#) [DA-075-12-02-00-00](#) [DA-075-24-02-00-00](#) [DL-120-24-00-00-00](#) [DL-210-24-00-00-00](#) [TC-NTC-1](#) [TC-NTC-2](#) [385910-043](#) [385911-015](#) [387002415](#)