




Internal door mount



HEX260PA-A series

Dimension drawing

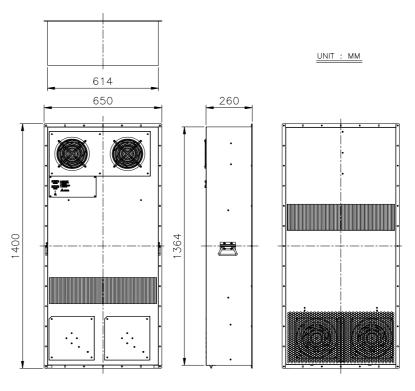

INTERNAL

EXTERNAL

Features

- IP55 waterproof at external side
- One touch" dry run test and dust cleaning
- Standalone temperature control
- Clear LED status indicator
- Dry contact alarm output

Design

- Air to air heat exchange
- Rated voltage at 48V
- Reduntant fan quantity design
- High efficiency and reliable fan
- Easy installation and maintenance

Main feature	Unit	Specification	
Dimension (H x W x D)	mm (in)	1400 x 650 x 260 (55 x 26 x 10)	
Cooling capacity _{*Note}	W/K (W/° F)	175 (97)	230 (128)
Rated voltage	VDC	48	
Operating current	Α	3.1	10.0
Opearting power	w	149	480
Operating voltage range	VDC	40 ~ 60	
Operating temperature range	°C	-10 ~ +65	
Noise (1.5 meter)	dB-A	65.0	75.0
Weight	Kg (Lb)	37 (82)	

* Note : The cooling capacity (W/K , W/°C or W/°F) is defined as $\,$ Q/ (TI-TA) $\,$

Q : Heat dissipation (W) from inside of cabinet

- TI : Return temperature of internal air circuit (K , °C or °F)
- TA : Ambient temperature of external air circuit (K , °C or °F)

* Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thermoelectric Assemblies category:

Click to view products by Delta manufacturer:

Other Similar products are found below :

C3400-154 HEX020VA HEX150PC HEX160PA HEX200PC HEX150PB HEX060PA HEX200PB HEX050QA TEC1-04908 TEC1-06310 TEC1-07103 HEX050PA HEX080QA 371061,01 MBS HH 387004204 TEC1-01708 TEC1-06308 TEC1-06306 CM036-20002N CM036-20003N TEC1-12703 TEMA-AA-50-12 TEMA-AA-50-24 TEMA-AP-40-12 TEMA-AP-80-24 DA-044-12-02-00-00 LA-075-24-02-00-00 TC-18-QC-50 AA-060-24-22-00-00 TC-18-QE-50 LA-045-12-02-00-00 DA-160-24-02-00-00 AA-150-24-22-00-00 AA-040-24-22-00-00 AA-034-12-22-00-00 AA-019-12-22-00-00 387000176 WL 500 AA-026-12-22-00-00 DA-033-12-02-00-00 DA-075-12-02-00-00 DA-075-24-02-00-00 DL-120-24-00-00-00 DL-210-24-00-00 TC-NTC-1 TC-NTC-2 385910-043 385911-015