

LED Driver

USC4 LITE



USC4 LITE

Highlights & Features

- Constant current design
- Programmable output current through program tool
- 6KV Combi-wave surge rating meet ANSI C82.77-5
- UL LISTED, Class P & Type HL , UL Dry & Damp
- 1-10V dimming available
- 50,000hours lifetime

Safety Standards



Model Number: USC4-□□□□□□GB

Dimensions (L x W x H):

| | |
|---------------|--|
| USC4-100140GB | 6.59" x 2.36" x 1.5" (168.0 x 60.0 x 38.0mm) |
| USC4-200140GB | 9.45" x 2.36" x 1.5" (240.0 x 60.0 x 38.0mm') |

General Description

Delta LED drivers come in different series to suit different application needs. The USC4 LITE series features program output current level. USC4 LITE series offers the capability to achieve different level of LED brightness via built-in 1-10V dimming function to meet various application and energy optimization needs. The products are designed and rigorously tested to work with various outdoor LED lighting conditions. Featuring high surge immunity (CM: 6kV, DM: 6kV) and complying to Dry and Damp location.

Model Information

USC4 LITE LED Driver

| Model Number | Input Voltage Range | Rated Output Voltage | Program Output Current | Constant Power Current |
|---------------|---------------------|----------------------|------------------------|------------------------|
| USC4-100140GB | | 50-143Vdc | 600-1400mA | 700-1400mA |
| USC4-200140GB | | 75-190Vdc | 600-1400mA | 1050-1400mA |

Model Numbering

| US | C | 4 | - | □□□ | □□□ | GB |
|--------------------------|---------------------|--------------------------------------|---|---------------------------------------|------------------------------------|--|
| Safety Approval - UL, | Constant current | Outdoor and High voltage input | | Output Power 100:100W/ 200:200W | Max Output Current 140 – 1400mA | Programmable output current 1-10V dimming |

LED Driver

USC4 LITE

Specifications

| | | |
|---------------------|---------------|---------------|
| Model Number | USC4-100140GB | USC4-200140GB |
|---------------------|---------------|---------------|

Input Ratings / Characteristics

| | | | |
|-----------------------------|----------------------|------------|-------------|
| Normal Input Voltage | 277-480Vac | | |
| Input Voltage Range | 254-528Vac | | |
| Normal Input Frequency | 50-60Hz | | |
| Input Frequency Range | 47-63Hz | | |
| Max. Input Current | 277Vac | 0.45A | 0.8A |
| | 480Vac | 0.23A | 0.5A |
| Efficiency ¹⁾ | 277Vac | 91.5%@0.7A | 92.5%@1.05A |
| | 480Vac | 92.5%@0.7A | 93.5%@1.05A |
| Inrush Current @ Cold Start | 277Vac | 100A/200uS | 100A/200uS |
| | 480Vac | 200A/200uS | 200A/200uS |
| Power Factor | > 0.9 @Full Load | | |
| Total Harmonic Distortion | THD < 20% @Full Load | | |
| Leakage Current | < 0.75mA peak | | |

1) 100% Load (typical) and tested after 30 minutes warm up.

Output Ratings / Characteristics

| | | |
|---------------------------------|--|------------|
| Output Voltage Range | 50-143Vdc | 75-190Vdc |
| Max. No Load Output Voltage | 150Vrms | 230Vrms |
| Output Power Range | 100W | 200W |
| Adjustable Output Current (AOC) | 600-1400mA | 600-1400mA |
| | With steps of 1mA, configurable via software | |
| Minimum Output Current | +/-10% dim level | |
| Current Accuracy | ± 5% (@ Typical output current range) | |
| Line Regulation | ± 1% (@ 277-480Vac input) | |
| Load Regulation | ± 3% (@ Min-Max output voltage) | |
| Output Current LF Ripple | 15% (ripple = peak-average/average) and Low frequency (≤120 Hz) content <5% @Full Load | |
| Start-up Time | 1000ms max. @ 277-480Vac @Full Load | |

LED Driver

USC4 LITE

| | | |
|---------------------|---------------|---------------|
| Model Number | USC4-100140GB | USC4-200140GB |
|---------------------|---------------|---------------|

Mechanical

| | | |
|---------------------------------------|---|---|
| Casing | Steel case, color : Black | |
| Dimensions (L x W x H) [inch] [mm] | 6.59" x 2.36" x 1.5" (168.0 x 60.0 x 38.0mm) | 9.45" x 2.36" x 1.5" (240.0 x 60.0 x 38.0mm) |
| Unit Weight [lb] / [kg] | 1.83 / 0.83 | 2.53 / 1.15 |
| Cooling System | Convection | |
| Input Cable | L: Black, N: White; UL1316 18AWG solid copper wires Length 300mm | |
| Output Cable | Positive: Red, Negative: Blue; NTC/PRG: Orange ; UL1316 18AWG solid copper wires Length 300mm | |
| Dimming Cable | Dim(+): Purple, Dim(-): Pink ; UL1316 18AWG solid copper wires Length 300mm | |
| Noise | Sound Pressure Level (SPL) < 24dBA (30cm distance) | |

Environment

| | | | |
|--------------------------|------------|-------------------------------|-------|
| Ambient Temperature | Operating | -40°C to +55°C | |
| | Storage | -40°C to +85°C | |
| Maximum Case Temperature | | +85°C | +90°C |
| Relative Humidity | Operating | 10 to 85% RH (Non-Condensing) | |
| | Storage | 5 to 95% RH (Non-Condensing) | |
| Environmental Locations | Dry & Damp | | |

Protections

| | | |
|------------------------|--|---------|
| Over Voltage | 150Vrms | 230Vrms |
| | Auto-Recovery when the fault is removed | |
| Overload / Overcurrent | Reduce output current. Auto-Recovery when the fault is removed | |
| Short Circuit | Auto-Recovery when the fault is removed | |
| Over Temperature | Reduce output current. Auto-Recovery when the fault is removed | |
| Case connection | Case must be grounding | |

Reliability Data

| | | |
|---------------|---|-------|
| Lifetime | 50,000 hours at case temp. tc & full load. Refer to "Lifetime VS Case Temperature" | |
| Lifetime @ tc | +75°C | +80°C |

LED Driver

USC4 LITE

| | | |
|---------------------|---------------|---------------|
| Model Number | USC4-100140GB | USC4-200140GB |
|---------------------|---------------|---------------|

Safety Standards / Directives

| | | | | |
|--------------------|-------------------------------------|------------|------------|------------|
| Electrical Safety | UL 8750 Class P & type "HL" | | | |
| Material and Parts | RoHS Directive 2011/65/EU Compliant | | | |
| Isolation | Main | Output | 0-10V dim | Case |
| Main | N/A | 2U + 1000V | 2U + 1000V | 2U + 1000V |
| Output | 2U + 1000V | N/A | 2U + 1000V | 2U + 1000V |
| 0-10V dim | 2U + 1000V | 2U + 1000V | N/A | 2U + 1000V |
| Case | 2U + 1000V | 2U + 1000V | 2U + 1000V | N/A |

EMC Compliance

| | |
|---------------------|--|
| Emissions (CE & RE) | Compliance to 47 CFR FCC Part 15, Subpart B, Class A Compliance to CAN ICES-005(A) / NMB-005(A) |
| Surge | Compliance to ANSI C82.77-5 CAT C low 6KV Meet Criteria A or B |

- 1) Criteria A: Normal performance within the specification limits
- 2) Criteria B: Temporary degradation or loss of function, which is self-recoverable

LED Driver

USC4 LITE

| | | |
|---------------------|---------------|---------------|
| Model Number | USC4-100140GB | USC4-200140GB |
|---------------------|---------------|---------------|

0-10V Dimming Specification

| | |
|--------------------------|--|
| Absolute Maximum Voltage | ± 20V |
| Source Current | 100μA (typ) |
| Dimming Input Range | (1)1-10V for 10-100% dimming and 1V for 10% of Io_set and ≥ 8.5V is 100% of Io_set (2) Short is 10% of Io_set (or 100mA minimum) & Open is 100% (3)See 1-10V Dimming Curve |


Default Settings of the Driver (can be changed with programmable tools)

| | | |
|-------------------------------------|---|--------|
| Adjustable Output Current (AOC) | 700mA | 1050mA |
| Smart Timer DIM | Disabled Smart Time Dim | |
| Module Temperature Protection (MTP) | Disabled. Settable though programmable tools | |
| Constant Lumen Output (CLO) | Disabled. Settable though programmable tools. | |
| End of Life indication (EOL) | Disabled. Settable though programmable tools | |


LED Driver

USC4 LITE

Operation Window for programming

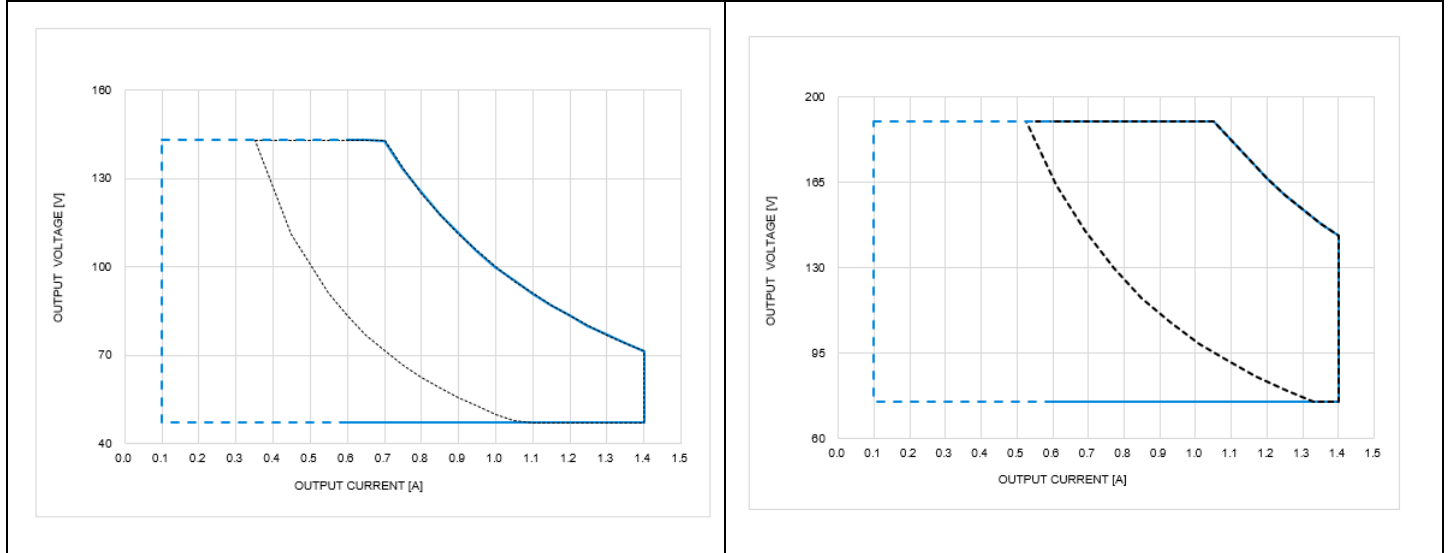



Dimming Curve

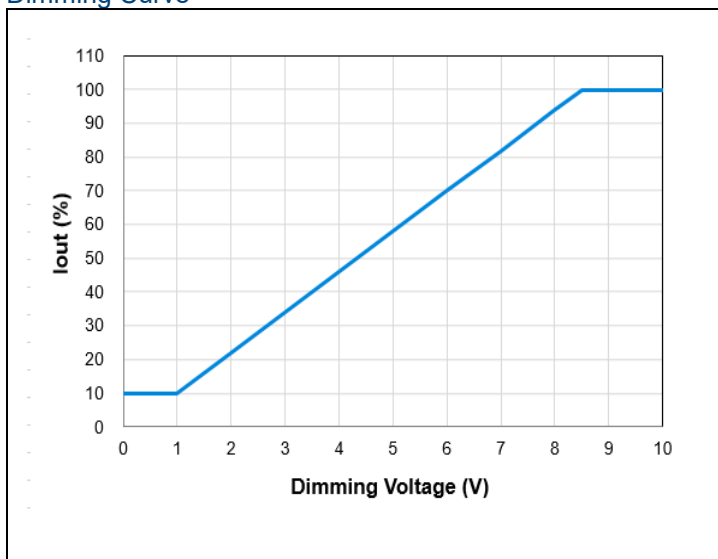

LED Driver

USC4 LITE

Efficiency VS Output Power

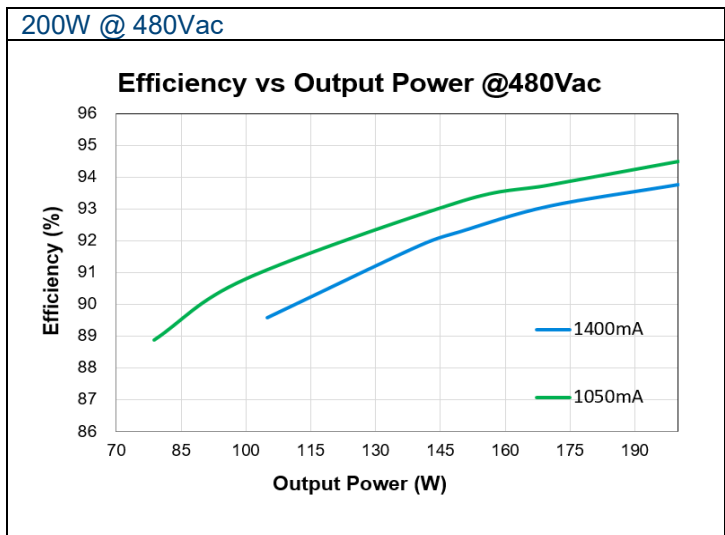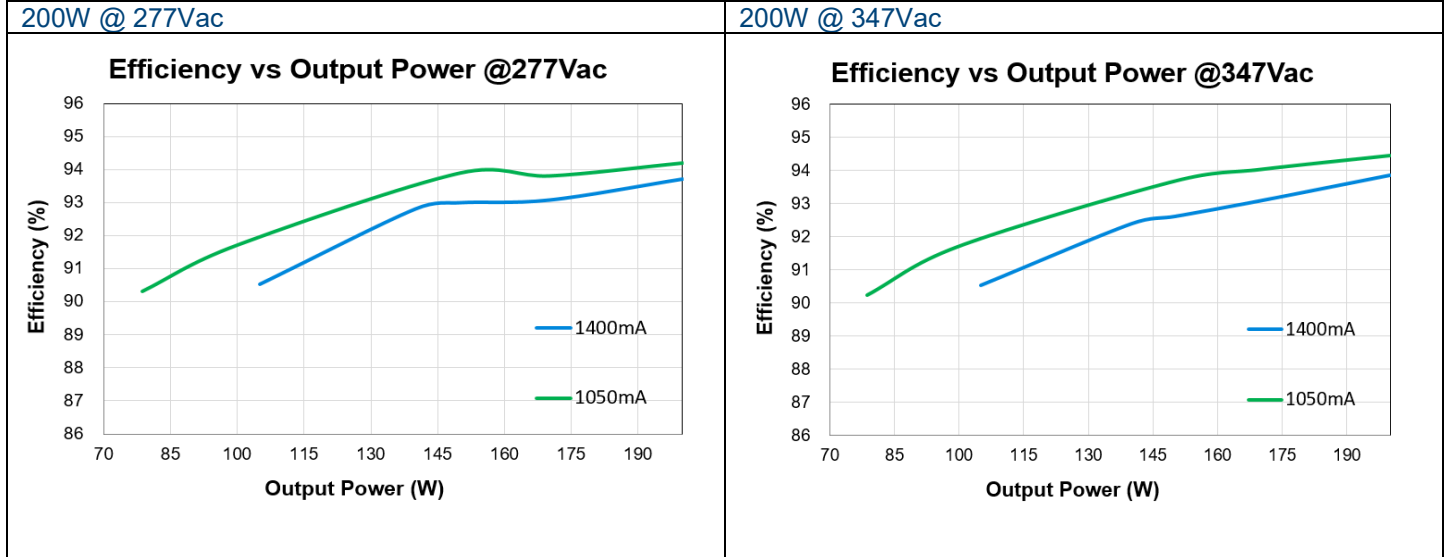


LED Driver


USC4 LITE

Power Factor VS Output Powe


200W @ 277Vac

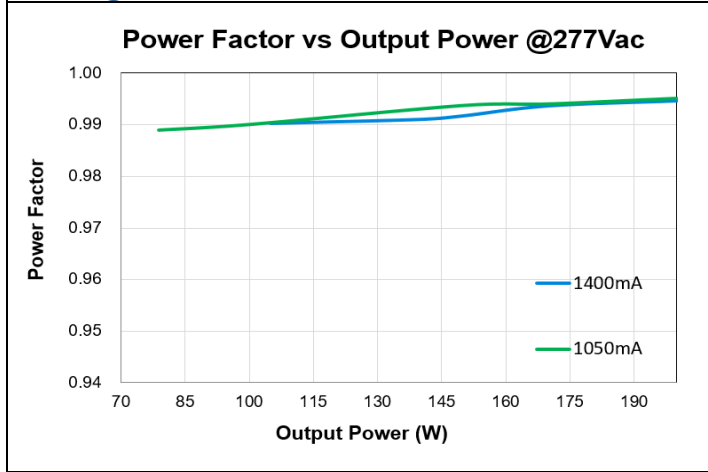

200W @ 347Vac

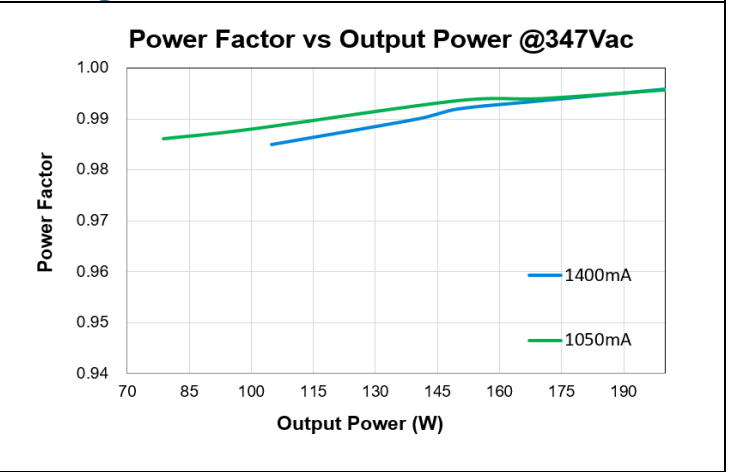



200W @ 480Vac

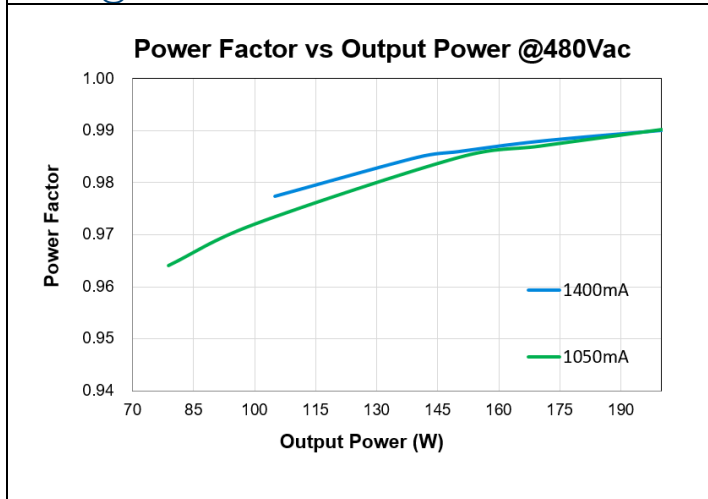

LED Driver

USC4 LITE



Total Harmonic Distortion VS Output Power

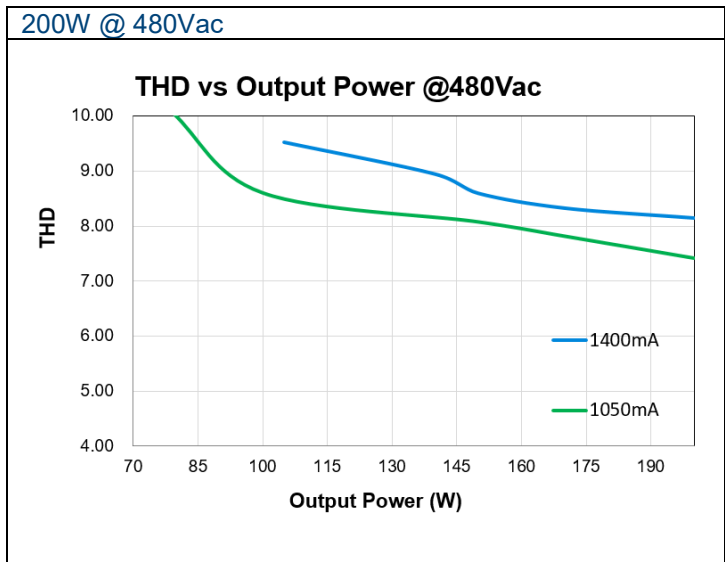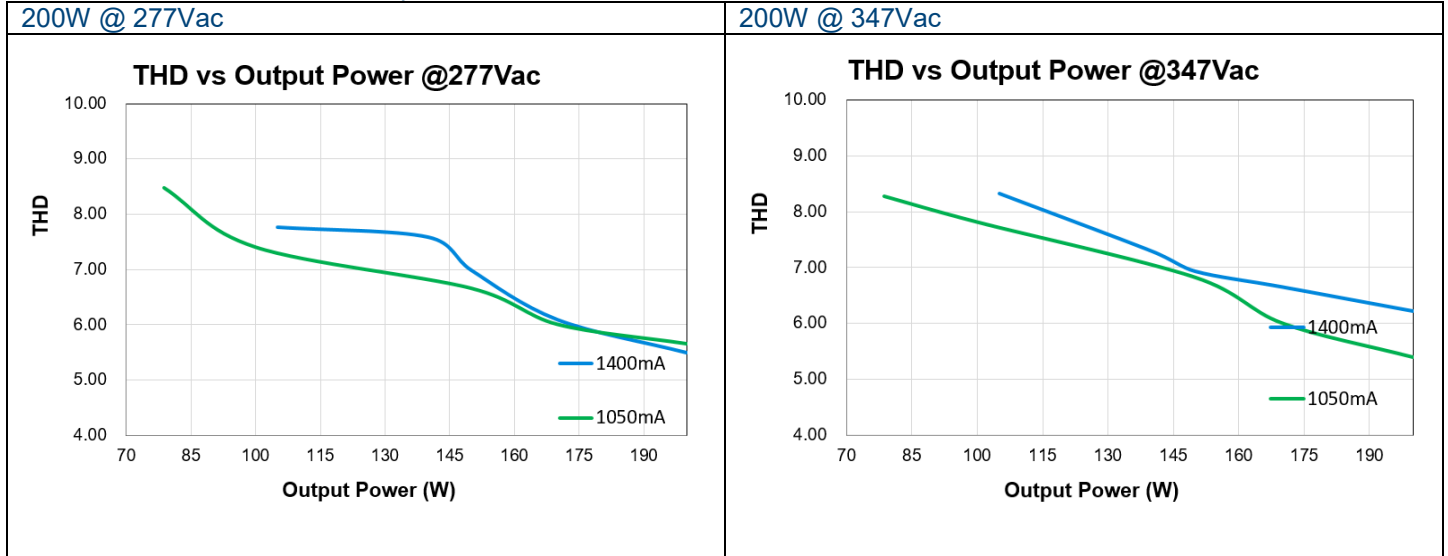

LED Driver

USC4 LITE



Efficiency VS Output Power

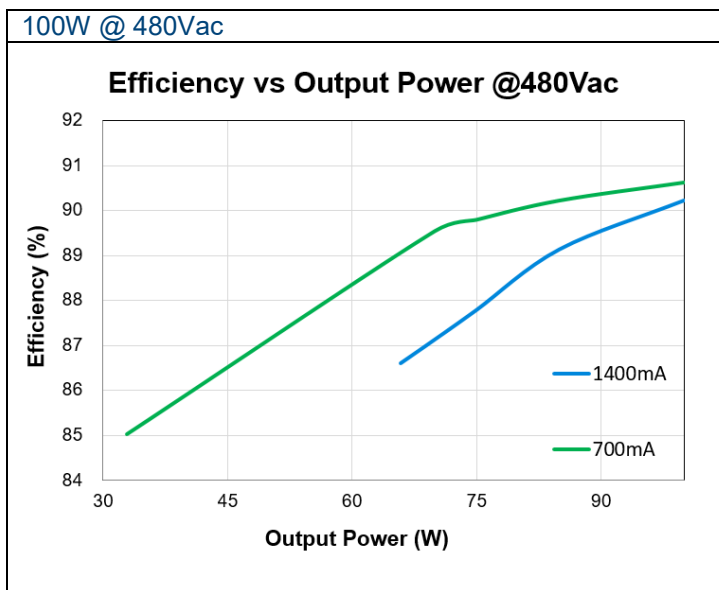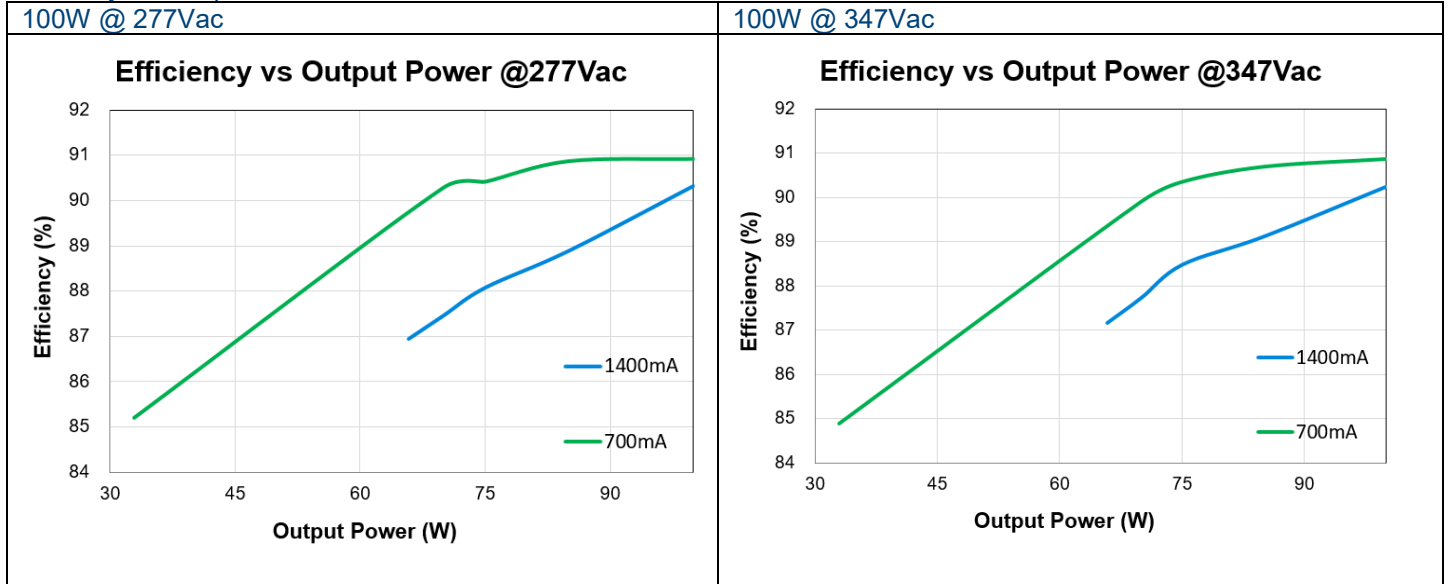

LED Driver

USC4 LITE



Power Factor VS Output Power

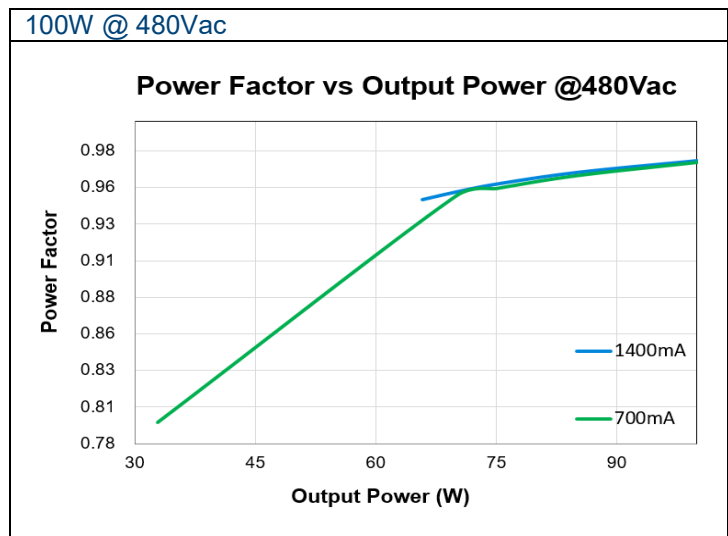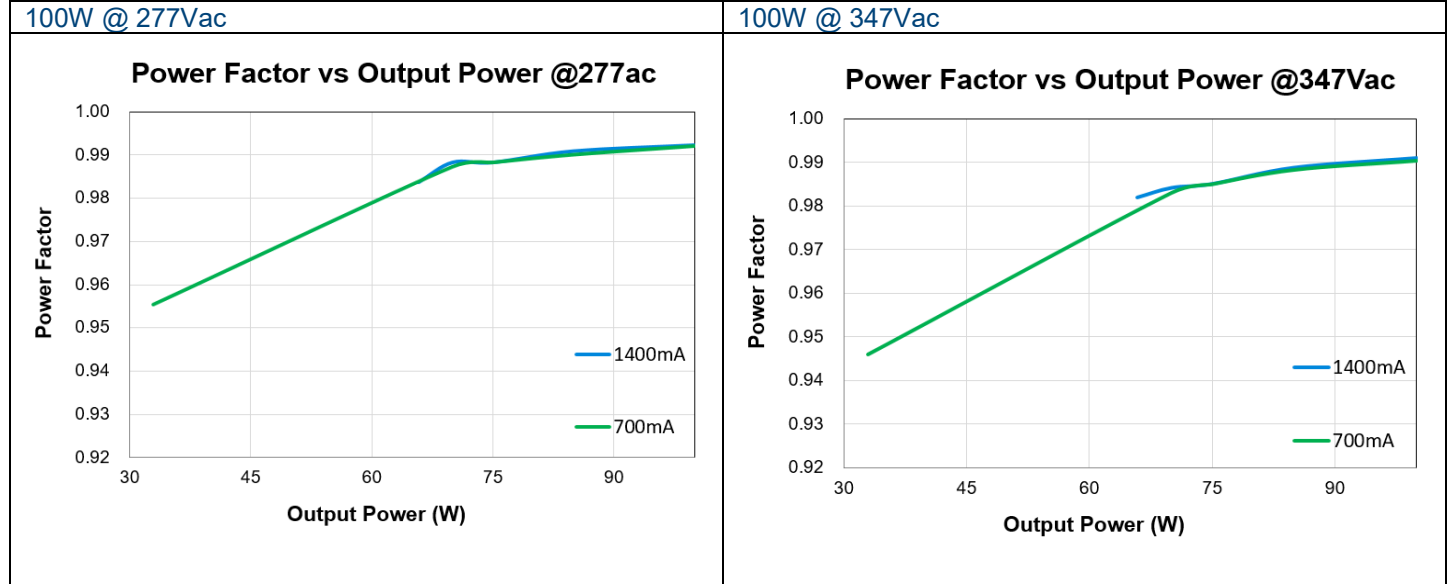

LED Driver

USC4 LITE


Total Harmonic Distortion VS Output Power

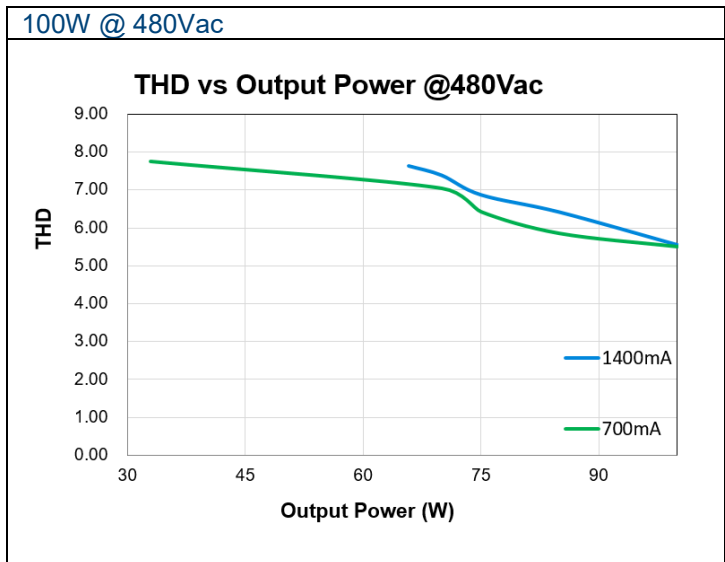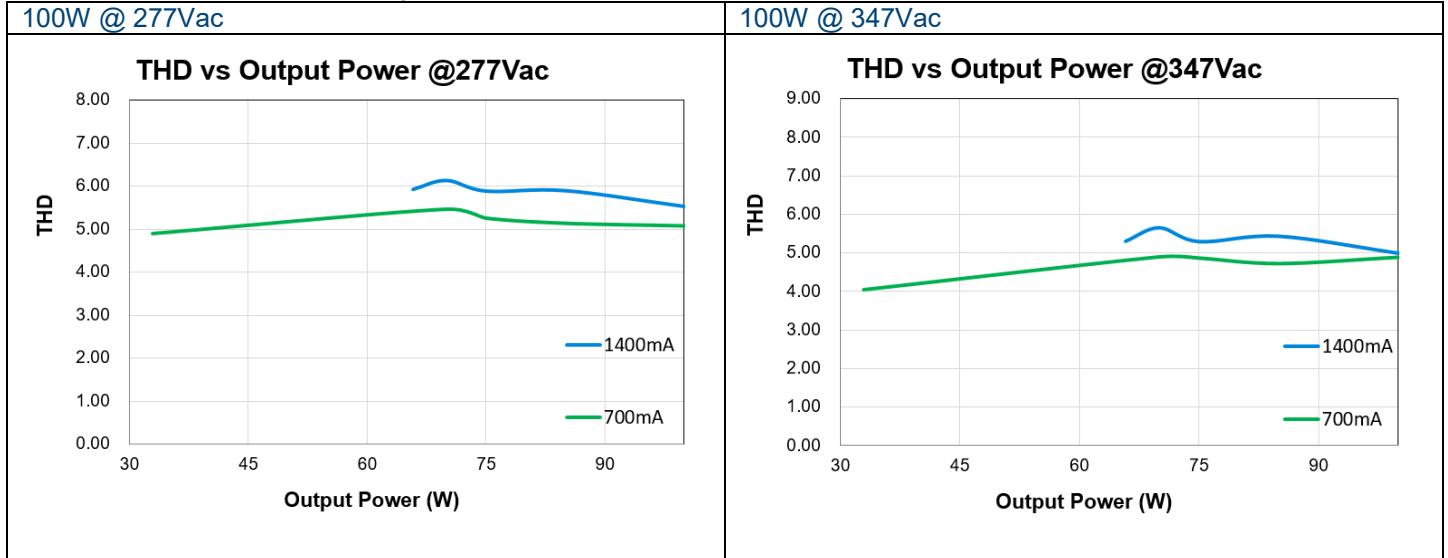


LED Driver

USC4 LITE


200W @ 277Vac

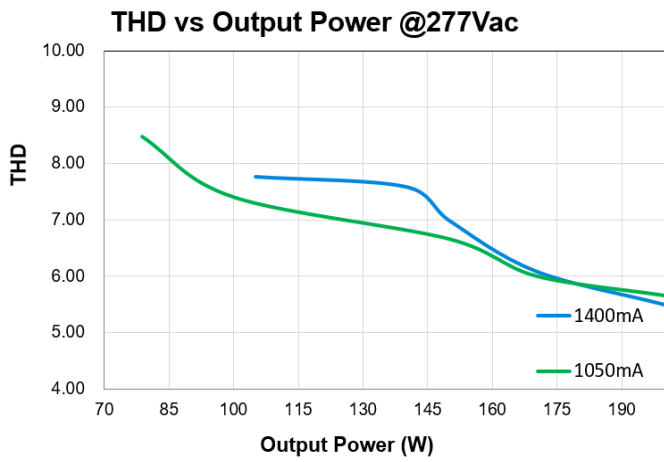

200W @ 347Vac

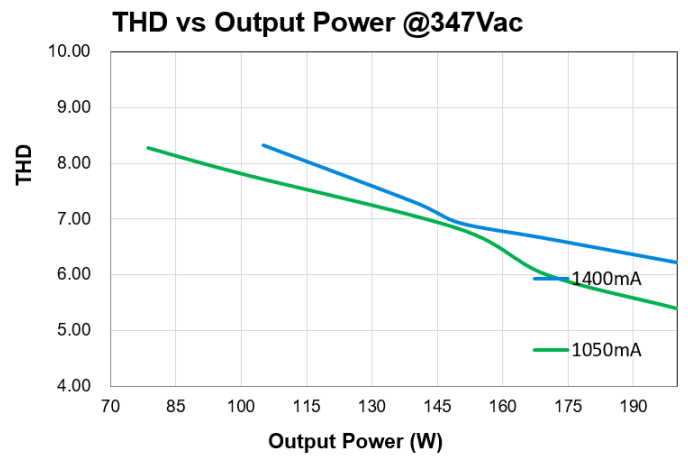


200W @ 480Vac

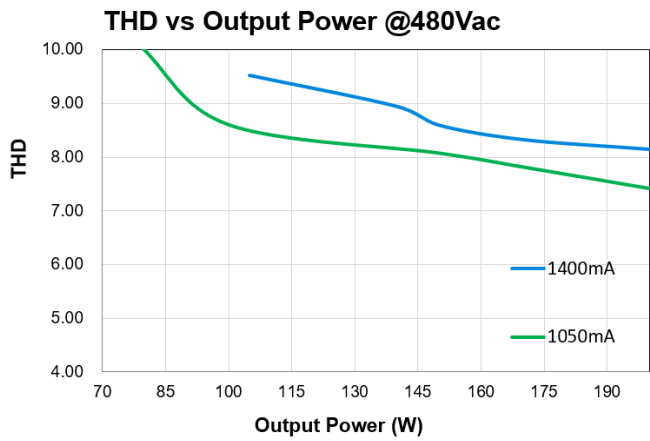

LED Driver

USC4 LITE

Lifetime VS Case Temperature

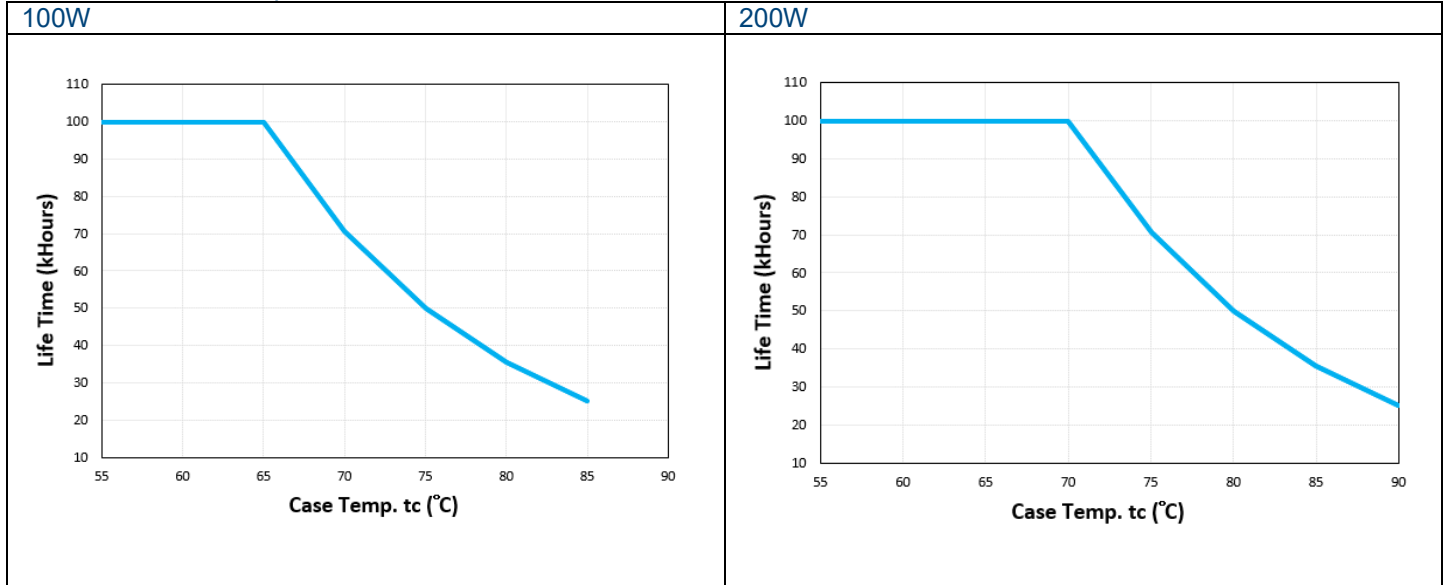


LED Driver

USC4 LITE

Enclosure

| | USC4-100140GB | USC4-200140GB |
|-----------------------------|---------------|---------------|
| | inch [mm] | inch [mm] |
| Total length (L1) | 6.59 [168] | 9.45 [240] |
| Case length (L2) | 5.48 [139.2] | 8.39 [213.2] |
| Case width (W) | 2.36 [60.0] | 2.36 [60.0] |
| Case height (H) | 1.5 [38.0] | 1.5 [38.0] |
| Mounting length (M1) | 6.03 [153.2] | 8.9 [226] |
| Mounting hole diameter (M2) | 0.32 [8.0] | 0.32 [8.0] |

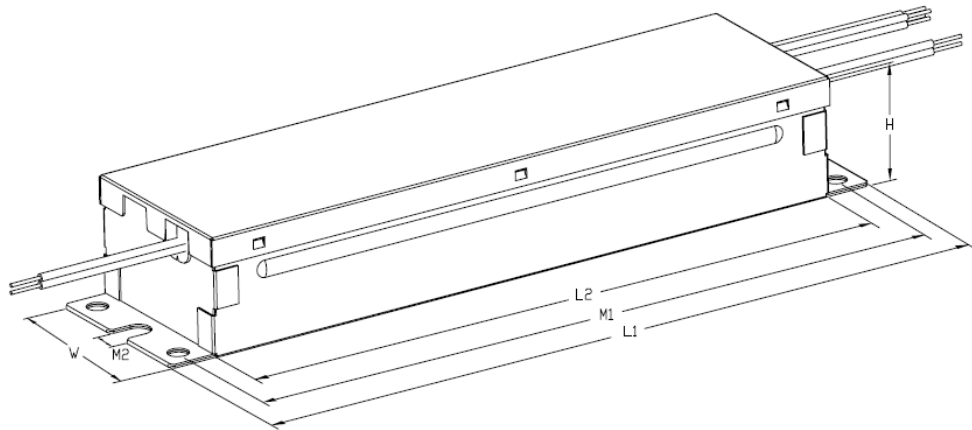


LED Driver

USC4 LITE

Assembly & Installation

The device is not recommended to be placed on low thermal conductive surfaces. For example, plastics.

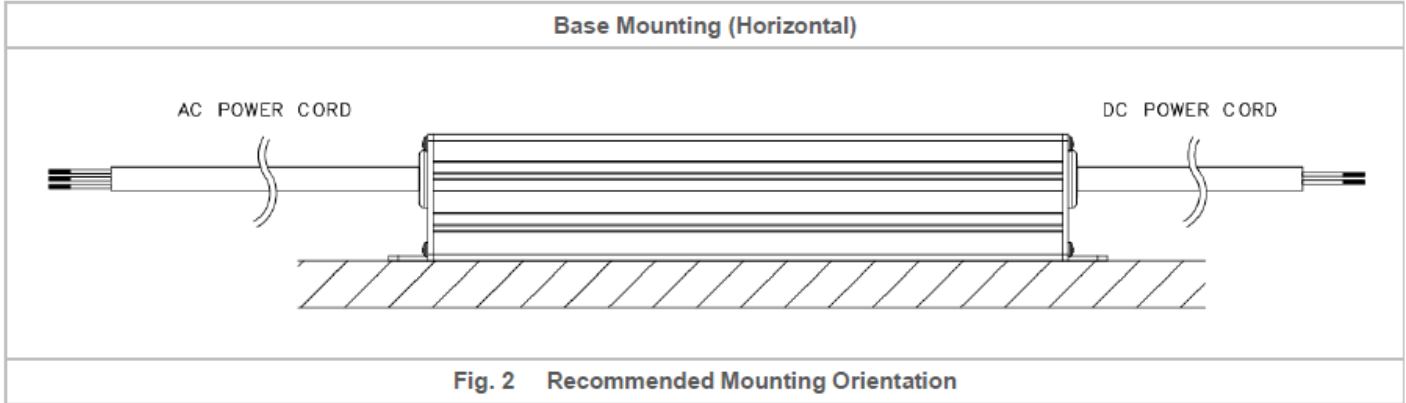

Safety Instructions

- ALWAYS switch mains of input power OFF before connecting and disconnecting the input voltage to the device. If mains are not turned OFF, there is risk of explosion / severe damage.
- To guarantee sufficient convection cooling, keep a distance of 50mm above and lateral distance to other units.
- DO NOT insert any objects into the device.
- The case of LED driver must be connected with grounding (PE).
- The current rating for the output cable must be rated higher than or equal to the output current of the power supply. Please refer to the product specifications..

Others

Warranty Policy

Please reach out our [Warranty Policy](#) should you require any further clarification.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Delta](#) manufacturer:

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [BPOXL 4-12-035](#) [ESS010W-0180-42](#)
[ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [ESS010W-0500-12](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [HVG-320-](#)
[36AB](#) [HVG-320-54AB](#) [DAL30W-0600-42-T](#) [HVG-320-48AB](#) [CNB50W-1200-42-CAS](#) [CNB30W-0600-42-CAS](#) [87500757](#) [I-SELECT 2](#)
[PLUG 900MA BL](#) [LCU 48V 75W DC-STR FO](#) [I-SELECT 2 PLUG 200MA BL](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [LC 50/200-](#)
[350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LC 28W 300-700MA 42 FLEXC NF SC EXC3](#) [LC 44/1050/42 FIXC SRL](#)
[ADV2](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-](#)
[E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC PRE SP](#) [LC 15/350/42 FIXC SRL ADV2](#) [LC 60W 75-330MA](#)
[310V FLEXC NF H16 EXC4](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 25/500/43 FIXC SR SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC](#)
[25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC](#)
[60/700/86 FIXC SR SNC2](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC 15W](#)
[350MA FIXC C SNC](#) [LC 14W 700MA FIXC PC SR SNC2](#)