
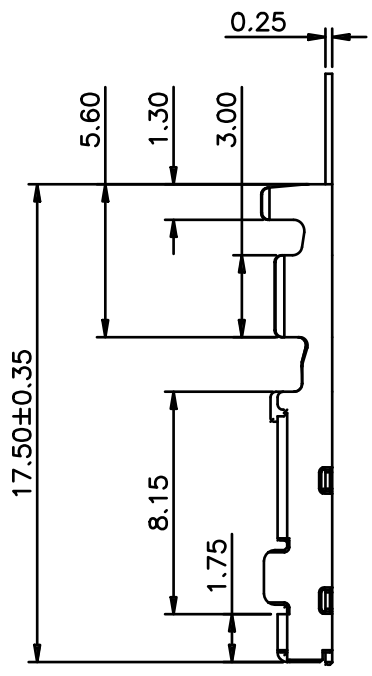


REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
1			INITIAL RELEASE	2023.03.01	Yy_D


NOTES:

1. MATERIAL:
 - 1.1 HIGH CONDUCTIVITY COPPER
2. FINISH:
 - 2.1 CONTACT: TIN 40~120u"
3. ELECTRICAL SPECIFICATION:
 - 3.1 VOLTAGE RATING: 50V MAX. AC/DC.
 - 3.2 CURRENT RATING: 3A MAX. AC/DC.
 - 3.3 WITHSTANDING VOLTAGE: 1000V AC/MINUTE.
 - 3.4 TEMPERATURE RANGE: -40°C~+125°C
 - 3.5 INSULATION RESISTANCE: 1000MΩ.
 - 3.6 CONTACT RESISTANCE: 5MΩ MAX.AFTER ENVIRONMENT TESTING:<10MΩ

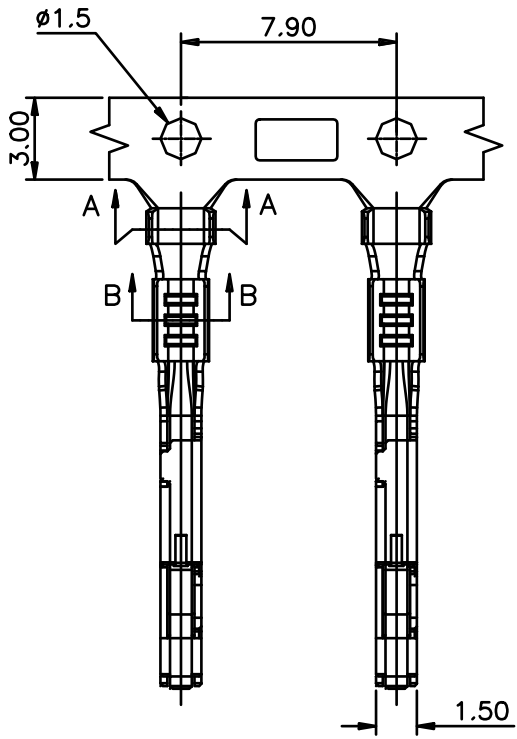


570CBG-036R**0**R**

- CUSTOMER CODE
- T: TRAY
- R: REEL
- APPEARANCE TYPE:
 - 1: ORDINARY 2: HIGH FEET
 - 3: LOW FEET
- AWG:
 - 1: AWG#18 2: AWG#20
 - 3: AWG#24~22
- SPECIAL NO.
 - 1: WITH LOGO
 - 2: WITHOUT LOGO
- R:RoHS
- H:HALOGEN-FREE
- FEMALE TERMINAL





Section A-A
Scale 1:1




Section B-B
Scale 1:1

High conductivity copper	AWG#18 (0.85mm ²)	1.80mm(Max)	2.70	2.90	2.55	3.00
	AWG#20 (0.5~0.75mm ²)	1.60~1.80mm	2.70	2.70	2.50	2.45
	AWG#24~22 (0.22~0.35mm ²)	1.20~1.60mm	2.60	2.60	2.10	2.10
Material	Wire Size	Insulation O.D	DIM a	DIM b	DIM c	DIM d

DIM		TOL		 DEREN SHENZHEN DEREN ELECTRONIC CO., LTD	CUSTOMER DRAWING		DATE		TITLE: WAFER FEMALE TERMINAL 2.20MM			
x	±0.35	x	±2'		DRAW NO.	DESIGN:	Yy_D	2023.03.14	P/N:SEE TABLE			
.x	±0.30					***	CHECK:			SHEET:	1/2	
.xx	±0.25				REV.	1	APPROVAL:		SCALE:	1:1	UNIT:	mm

A

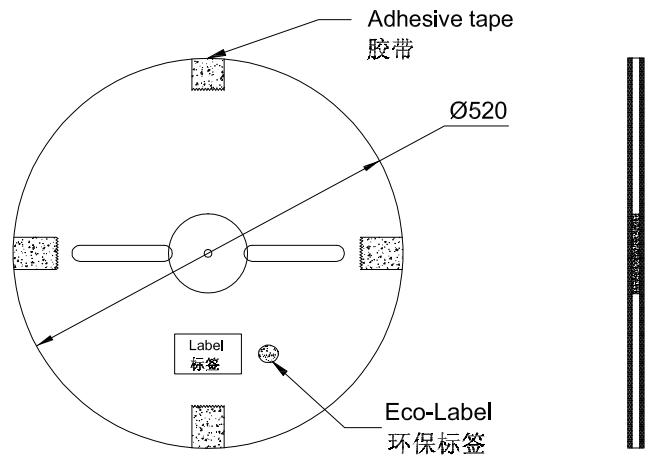


Note 注解:

- Quantity 数量: 5K PCS/REEL 一卷5K/PCS ; 8 REEL/BOX 一箱8卷 ; 40K PCS/BOX 一箱40K/PCS
每盘和外箱都必须有标签及环保标签分别标示
- Each reel and outer box must be labeled and Eco-Label Respectively labeled
每盘和外箱都必须有标签及环保标签分别标示
- Terminal winding direction as shown 端子缠绕方向如左图所示
- There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used
每箱不可有脏污,变形现象,尾数箱必须用填充物
- Carton material : K=K, Carton thickness : 6~7mm 纸箱材质:K=K, 纸箱厚度:6~7mm
- The paper tape shall be white paper tape with adhesive film and moisture proof
纸带需使用带胶膜防潮白色纸带
- One waterproof bag, two packets of desiccant 10g and four triangle guard plates should be placed in each carton
每箱里面要放一个防水袋和两包干燥剂10g及四个三角护板
- Up and down "工" type sealing form
上下"工"字型封箱形式
- Storage conditions: Temperature 10~30 °C; Humidity 20%~65%RH
存储条件: 温度10~30 °C; 湿度20%~65%RH

B

C

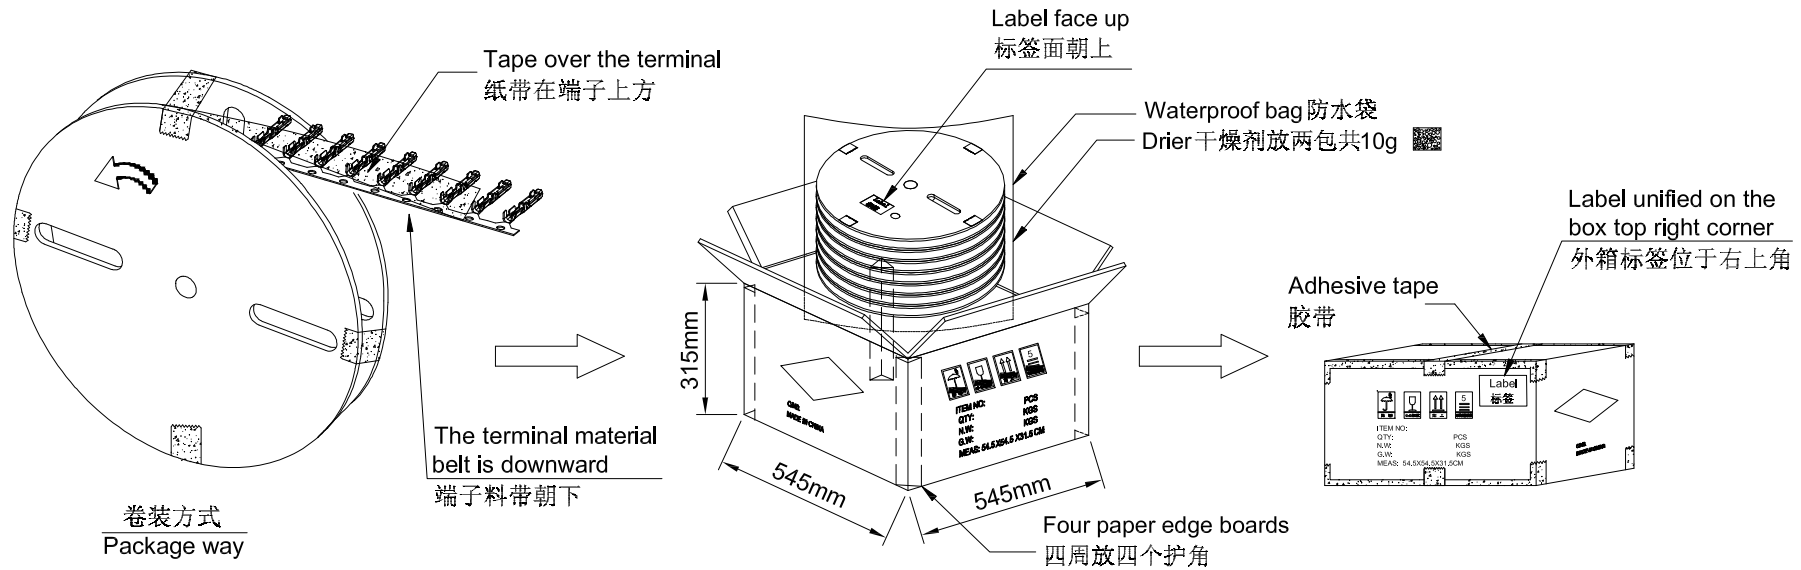

D

E

DIM	TOL	DIM	TOL
x.		x.	
.x			
.xx			

	DEREN SHENZHEN DEREN ELECTRONIC CO., LTD		
	CUSTOMER DRAWING		DATE
	DESIGN: Yy_D	2023.03.14	TITLE: WAFER FEMALE TERMINAL 2.20MM
	CHECK:		P/N: SEE TABLE
REV. 1	APPROVAL:		SHEET: 2/2
			SCALE: N/A UNIT: mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [DEREN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)