

# 安规陶瓷电容器承认书

## APPROVAL SPECIFICATIONS FOR SAFETY CERAMIC CAPACITOR (AEC-Q200 REV.)

客户 CUSTOMER	立创商城		
客户料号 CUSTOMER P/N	C3293130		
规格描述 DESCRIPTION	CY2471KD1IEB45VZAE		
产品品号 PART NUMBER	Y2/471K/F7.5/L24/Y5P/300VAC/AEC-Q200		
日期 DATE	2022-07-08	文件编号 DOC. NO.	DEC-SA-WI010

德尔创承认栏 APPROVED BY DERSONIC			客户承认栏 APPROVED BY CUSTOMER	
批准 APPROVED BY	审核 CHECK BY	制订 FORMULATE BY	批准 APPROVED BY	审核 CHECK BY
彭少雄	吴成爱 样品承认章	陈冬花		

東莞市德尔创电子有限公司

DONGGUAN CITY DERSONIC ELECTRONICS CO., LTD.

广东省东莞市长安镇锦厦河南工业区锦平路 5 号

NO.5, JINGPING ROAD, JINXIA HENAN INDUSTRIAL ZONE, CHANGAN TOWN DONGGUAN CITY, PRC

TEL: 86-769-8155 5686

FAX: 86-0769-8155 5989

WEBSITE: [HTTP://WWW.DERSONIC.COM](http://www.dersonic.com)

E-MAIL: [SALES@DERSONIC.COM](mailto:SALES@DERSONIC.COM)



**APPROVAL SPECIFICATIONS FOR  
SAFETY CERAMIC CAPACITOR (AEC-Q200 REV.)**


DOC NO.:	DEC-SA-WI001
REV.:	A/0
DATE:	2020-08-14
PAGE:	1 / 10

## CONTENTS


1. FEATURES.....	2
2. APPLICATIONS.....	2
3. STANDARD CERTIFICATION.....	2
4. HOW TO ORDER.....	3
5. MARKING.....	3
6. SPECIFICATIONS LIST.....	4
7. SPECIFICATION AND TEST METHODS.....	4
8. MEASURING AND APPLICATION NOTICE.....	8
9. TAPING SPECIFICATIONS.....	10

**1. FEATURES**

- CAPACITORS DESIGNED FOR AC LINE FILTERS FOR PHEV/EV
- MEET AEC-Q200
- HEAT CYCLE: 1000 CYCLE (-55/+125 DEG.)
- CLASS Y2 CAPACITORS CERTIFIED BY CQC, UL, VDE/ENEC
- RATED VOLTAGE: 250/300/400/500VAC
- COATED WITH FLAME-RETARDANT EPOXY RESIN (CONFORMING TO UL94V-0 STANDARD).
- TYPICAL TEMPERATURE CHARACTERISTIC CURVES (FOR REFERENCE)


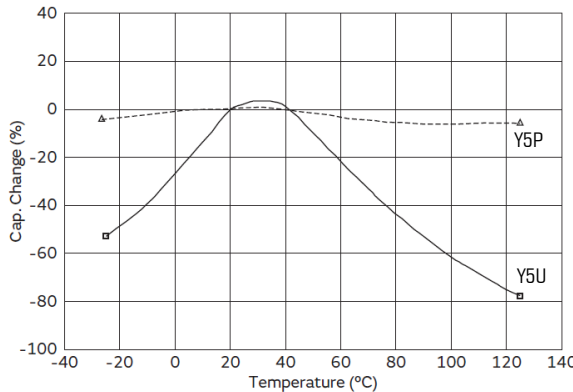


FIG, TEMP-CHARACTERISTIC

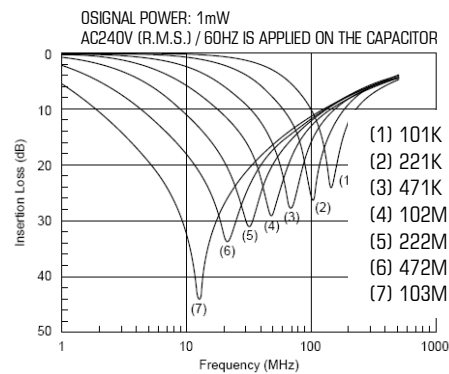

FIG, INSERTION LOSS-FREQUENCY

- INSERTION LOSS-FREQUENCY CHARACTERISTICS (SEE ABOVE RIGHT)
- LEAKAGE CURRENT CHARACTERISTICS

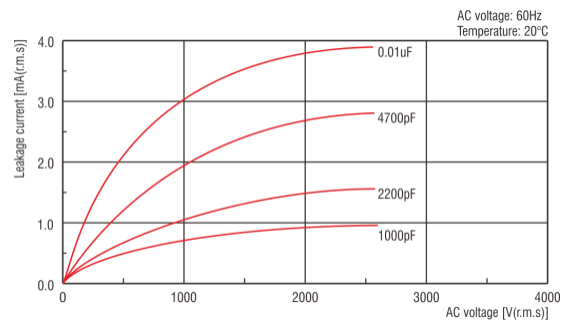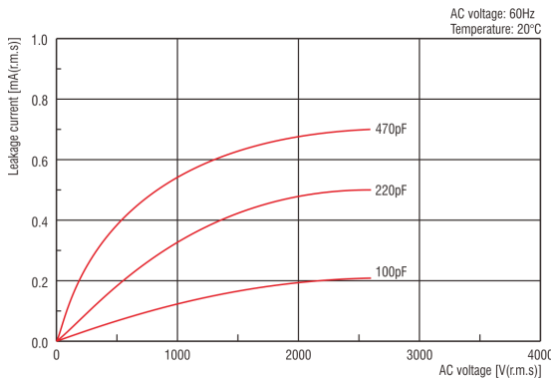

- TAPING AVAILABLE FOR AUTOMATIC INSERTION.
- AVAILABLE PRODUCT FOR ROHS RESTRICTION (EU DIRECTIVE 2002/95/EC).

**2. APPLICATIONS**

- IDEAL FOR USE AS Y CAPACITORS FOR AC LINE FILTERS AND PRIMARY-SECONDARY COUPLING ON BATTERY CHARGERS FOR PHEV/EV.
- IDEAL FOR USE AS A FILTER CAPACITOR FOR DC-DC CONVERTERS FOR PHEV/EV AND HEV.

**3. STANDARD CERTIFICATION**

APPROVAL MARK	APPROVAL STANDARDS	RATED VOLTAGE	CERTIFICATE NUMBER
	UL 60384-14	AC500V AC400V AC300V AC250V	E472525
	DIN EN 60384-14(VDE 0565-1-1):2014-04 EN 60384-14:2013-08 IEC 60384-14(ed. 4)		40045478
	IEC 60384-14:2013		CQC17001162592

#### 4. HOW TO ORDER


<u>CY2</u>	<u>471</u>	<u>K</u>	<u>D</u>	<u>1</u>	<u>I</u>	<u>E</u>	<u>B4</u>	<u>5V</u>	<u>ZAE</u>
TYPE	NOMINAL CAPACITANCE	TOLERANCE	LEAD SPACING	LEAD STYLE	LEAD LENGTH OR TAPING SPECIFICATION	COATING STYLE	TEMPERATURE CHARACTERISTICS	INTER CONTROL CODE	SERIES
■ TYPE	CY2: CLASS 2 TYPE SAFETY CERAMIC CAPACITORS								
■ NOMINAL CAPACITANCE	THREE-DIGIT REPRESENTATION, IN PICO-FARADS. EX. <b>471: 470PF;</b> 222: 2200PF								
■ TOLERANCE	<b>K: ±10%;</b> M: ±20%								
■ LEAD SPACING	<b>D: 7.5MM±1.0MM;</b> E: 10.0MM±1.0								
■ LEAD STYLE	<b>1: STRAIGHT LEAD;</b>			2: OUTSIDE KINK LEAD		5: VERTICAL KINK LEAD			
■ LEAD LENGTH OR TAPING SPECIFICATION	● <b>BULK (LEAD LENGTH)</b>		2: 3.0MM±0.5MM; 4: 3.5MM±0.5MM; 6: 4.0MM±1.0MM; 8: 5.0MM±1.0MM; 9: 6.0MM±1.0MM;			A: 8.0MM±2.0MM; B: 10.0MM±2.0MM; <b>I: 24.0MM±4.0MM;</b> J: 26.0MM±4.0MM M: 32.0MM±4.0MM		● TAPING	
								T: REEL PACKING; P: AMMO PACKING	
								NOTE: SEE SECTION 9 FOR DIMENSIONS.	
■ COATING MATERIAL	<b>E: EPOXY COATING (BLUE)</b>								
■ TEMPERATURE CHARACTERISTICS	<b>B4: Y5P;</b> E4: Y5U								
■ INTER CONTROL CODE	NOT BE DESCRIBED IN THIS AN APPROVAL SPECIFICATIONS.								
■ SERIES	<b>ZAE: COMPLIES AEC-Q200 REQUIREMENTS, RATED VOLTAGE 300VAC</b>								

#### 5. MARKING

THE MARKING IS COMPOSED OF COMPANY TRADEMARKS, SPECIFICATIONS, SAFETY MARKS AND CLIMATIC CATEGORY, ETC., AS DESCRIBED BELOW.

MARKING (EXAMPLE)	EXPLANATION
	COMPANY TRADEMARK (ZNRC)
	SPECIFICATIONS, INCLUDING FOR SAFETY SUBCLASS, NOMINAL CAPACITANCE AND ITS TOLERANCE. CS: Y2; 471: NOMINAL CAPACITANCE, 470PF; K: CAPACITANCE TOLERANCE, ±10%
	RATED VOLTAGE AND SAFETY SUBCLASS 300V~: RATED VOLTAGE Y2: SAFETY SUBCLASS
	SAFETY CERTIFICATION MARK VDE MARK:  ENEC MARK: CQC MARK:  UL/cUL MARK:
	CLIMATIC CATEGORY (40/125/21) AND PASSIVE FLAMMABILITY CATEGORY (C)

**6. SPECIFICATIONS LIST**

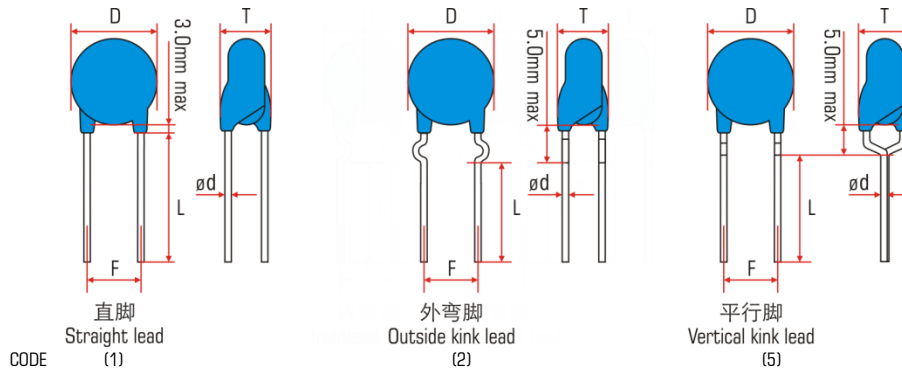

TEMP. CHAR.	CAP. (PF)	TOL.	BODY DIAMETER (D max)	BODY THICKNESS (T max)	LEAD SPACING (F±1.0mm)	LEAD WIRE DIAMETER (Φd±0.1mm)	PART NUMBER
Y5P	100	±10%	7.0mm	5.0mm	7.5mm	0.55mm	CY2101KD□□EB44GZAE
	150	±10%	7.0mm	5.0mm	7.5mm	0.55mm	CY2151KD□□EB44GZAE
	220	±10%	7.0mm	5.0mm	7.5mm	0.55mm	CY2221KD□□EB44GZAE
	330	±10%	7.0mm	5.0mm	7.5mm	0.55mm	CY2331KD□□EB44GZAE
	470	±10%	7.5mm	5.0mm	7.5mm	0.55mm	CY2471KD□□EB45VZAE
	680	±10%	8.5mm	5.0mm	7.5mm	0.55mm	CY2681KD□□EB46ZAE
	1000	±10%	11.0mm	5.0mm	7.5mm	0.55mm	CY2102KD□□EB48UZAE
Y5U	1000	±20%	7.5mm	5.0mm	7.5mm	0.55mm	CY2102MD□□EE45VZAE
	1500	±20%	8.5mm	5.0mm	7.5mm	0.55mm	CY2152MD□□EE46ZAE
	2200	±20%	10.0mm	5.0mm	7.5mm	0.55mm	CY2222MD□□EE48FZAE
	3300	±20%	12.0mm	5.0mm	7.5mm	0.55mm	CY2332MD□□EE49VZAE
					7.5mm	0.55mm	CY2472MD□□EE4BHZAE
	4700	±20%	14.0mm	5.5mm	10.0mm	0.55mm	CY2472ME□□EE4BHZAE
					7.5mm	0.55mm	CY2103MD□□EE4GBZAE
	10000	±20%	18.0mm	5.5mm	7.5mm	0.55mm	CY2103MD□□EE4GBZAE
10.0mm					0.55mm	CY2103ME□□EE4GBZAE	

\*: "□□" IS THE CODE OF LEAD STYLE AND LEAD LENGTH (BULK) OR TAPING SPECIFICATIONS, WHICH CAN BE CUSTOMIZED.

**7. SPECIFICATION AND TEST METHODS**

- TEST AND MEASUREMENT SHALL BE MADE AT THE STANDARD CONDITION (TEMPERATURE 15~35°C, RELATIVE HUMIDITY 45~75%). UNLESS OTHERWISE SPECIFIED HEREIN. IF DOUBT OCCURRED ON THE VALUE OF MEASUREMENT, AND MEASUREMENT WAS REQUESTED BY CUSTOMER CAPACITORS SHALL BE MEASURED AT THE REFERENCE CONDITION (TEMPERATURE 25±2°C, RELATIVE HUMIDITY 60~70%).
- OPERATING TEMPERATURE RANGE: -40 TO +125°C

NO.	ITEM	SPECIFICATIONS	TESTING METHOD
1	APPEARANCE AND DIMENSION	NO MARKED DEFECT ON APPEARANCE FORM AND DIMENSIONS ARE WITHIN SPECIFIED RANGE.	THE CAPACITOR SHOULD BE VISUALLY INSPECTED FOR EVIDENCE OF DEFECT. DIMENSIONS SHOULD BE MEASURED WITH SLIDE CALIPERS.
2	MARKING	TO BE EASILY LEGIBLE	THE CAPACITOR SHOULD BE VISUALLY INSPECTED.
3	CAPACITANCE (C <sub>r</sub> )	WITHIN SPECIFIED TOLERANCE	THE CAPACITANCE, TANδ SHOULD BE MEASURED AT 25°C ± 1°C WITH 1KHZ AND AC1.0V (R.M.S.). READ 8.1 BEFORE MEASUREMENT
4	TANGENT OF LOSS ANGLE (TANδ)	<0.025	
5	INSULATION RESISTANCE (IR)	>10000MΩ	THE INSULATION RESISTANCE SHOULD BE MEASURED WITH A DC 500V AT NORMAL TEMPERATURE AND HUMIDITY AND LESS THAN 1 MIN. OF CHARGING (THE TEST MAY BE TERMINATED IN A SHORTER TIME, IF THE REQUIRED VALUE OF INSULATION RESISTANCE IS REACHED).

CONTINUED FROM THE PRECEDING PAGE

NO.	ITEM	SPECIFICATIONS	TESTING METHOD												
6	LEAD WIRES	NO FAILURE	<p>THE CAPACITOR SHOULD NOT BE DAMAGED WHEN TEST VOLTAGES OF FOLLOWING TABLE ARE APPLIED BETWEEN THE LEAD WIRES FOR 60 SEC. (CHARGE/DISCHARGE CURRENT <math>\leq 50\text{MA}</math>)</p> <table border="1"> <tr> <td>TYPE</td> <td>Y2</td> </tr> <tr> <td>TEST VOLTAGE</td> <td>AC2500V</td> </tr> </table>	TYPE	Y2	TEST VOLTAGE	AC2500V								
	TYPE	Y2													
TEST VOLTAGE	AC2500V														
TEST VOLTAGE (TV)	BODY INSULATION	NO FAILURE	<p>FIRST, THE TERMINALS OF THE CAPACITOR SHOULD BE CONNECTED TOGETHER. THEN, AS SHOWN IN FIGURE AT RIGHT, A METAL FOIL SHOULD BE CLOSELY WRAPPED AROUND THE BODY OF THE CAPACITOR TO THE DISTANCE OF ABOUT 3 TO 4MM FROM EACH TERMINAL.</p> <p>THEN, THE CAPACITOR SHOULD BE INSERTED INTO A CONTAINER FILLED WITH METAL BALLS OF ABOUT 1MM DIAMETER. FINALLY, AC VOLTAGE OF FOLLOWING TABLE IS APPLIED FOR 60 SEC. BETWEEN THE CAPACITOR LEAD WIRES AND METAL BALLS.</p> <table border="1"> <tr> <td>TYPE</td> <td>Y2</td> </tr> <tr> <td>TEST VOLTAGE</td> <td>AC2500V</td> </tr> </table>	TYPE	Y2	TEST VOLTAGE	AC2500V								
TYPE	Y2														
TEST VOLTAGE	AC2500V														
7	TEMPERATURE CHARACTERISTICS	<p>Y5P: WITHIN <math>\pm 10\%</math>                      Y5U: WITHIN <math>+20/-55\%</math>                      (TEMP. RANGE: <math>-25</math> TO <math>+85^{\circ}\text{C}</math>)</p>	<p>THE CAPACITANCE MEASUREMENT SHOULD BE MADE AT EACH STEP SPECIFIED IN FOLLOWING TABLE.</p> <table border="1"> <thead> <tr> <th>STEP</th> <th>TEMPERATURE (<math>^{\circ}\text{C}</math>)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>+20 \pm 2</math></td> </tr> <tr> <td>2</td> <td><math>-25 \pm 2</math></td> </tr> <tr> <td>3</td> <td><math>+20 \pm 2</math></td> </tr> <tr> <td>4</td> <td><math>+85 \pm 2</math></td> </tr> <tr> <td>5</td> <td><math>-20 \pm 2</math></td> </tr> </tbody> </table> <p>PRE-TREATMENT:                      CAPACITOR SHOULD BE STORED AT <math>125 \pm 3^{\circ}\text{C}</math> FOR 1H, THEN PLACED AT ROOM CONDITION FOR <math>24 \pm 2\text{H}</math> BEFORE INITIAL MEASUREMENTS.</p>	STEP	TEMPERATURE ( $^{\circ}\text{C}$ )	1	$+20 \pm 2$	2	$-25 \pm 2$	3	$+20 \pm 2$	4	$+85 \pm 2$	5	$-20 \pm 2$
STEP	TEMPERATURE ( $^{\circ}\text{C}$ )														
1	$+20 \pm 2$														
2	$-25 \pm 2$														
3	$+20 \pm 2$														
4	$+85 \pm 2$														
5	$-20 \pm 2$														
8	SOLDERABILITY	LEAD WIRE SHOULD BE SOLDERED WITH UNIFORM COATING ON THE AXIAL DIRECTION OVER 3/4 OF THE CIRCUMFERENTIAL DIRECTION.	<p>SHOULD BE PLACED INTO STEAM AGING FOR <math>8\text{H} \pm 15\text{MIN}</math>. AFTER THE STEAM AGING, THE LEAD WIRE OF A CAPACITOR SHOULD BE DIPPED INTO AN ETHANOL SOLUTION OF 25% ROSIN AND THEN INTO MOLTEN SOLDER FOR <math>5 \pm 0/-0.5\text{S}</math>. THE DEPTH OF IMMERSION IS UP TO ABOUT 1.5 TO 2.0MM FROM THE ROOT OF LEAD WIRES.</p> <p>TEMP. OF SOLDER: LEAD FREE SOLDER (SN-3AG-0.5CU) <math>245 \pm 5^{\circ}\text{C}</math>                      H63 EUTECTIC SOLDER (PB37/SN63) <math>235 \pm 5^{\circ}\text{C}</math></p>												
9	RESISTANCE TO SOLDERING HEAT	APPEARANCE	NO MARKED DEFECT												
		$\Delta\text{C}/\text{C}$	$\pm 10\%$												
		IR	$> 2000\text{M}\Omega$												
		TV	PER ITEM 6												
10	VIBRATION RESISTANCE	APPEARANCE	NO MARKED DEFECT												
		$\text{C}_R$	WITHIN THE SPECIFIED TOLERANCE												
		TAN $\delta$	PER ITEM 4												
11	MECHANICAL SHOCK	APPEARANCE	NO MARKED DEFECT												
		$\text{C}_R$	WITHIN THE SPECIFIED TOLERANCE												
		TAN $\delta$	$< 0.050$												
		TV	$> 10000\text{M}\Omega$												

CONTINUED FROM THE PRECEDING PAGE

NO.	ITEM	SPECIFICATIONS	TESTING METHOD
12	HUMIDITY (UNDER STEADY STATE)	APPEARANCE	NO MARKED DEFECT
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 15\%$
		TAN $\delta$	<0.050
		IR	>2000M $\Omega$
		TV	PER ITEM 6
13	HUMIDITY LOADING	APPEARANCE	NO MARKED DEFECT
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 20\%$
		TAN $\delta$	<0.050
		IR	>2000M $\Omega$
		TV	PER ITEM 6
14	LIFE	APPEARANCE	NO MARKED DEFECT
		$\Delta C/C$	$\pm 20\%$
		IR	>3000M $\Omega$
		TV	PER ITEM 6
15	ROBUSTNESS OF TERMINATIONS	TENSILE	LEAD WIRE SHOULD NOT BE CUT OFF. CAPACITOR SHOULD NOT BE BROKEN.
		BENDING	EACH LEAD WIRE SHOULD BE SUBJECTED TO 5N OF WEIGHT AND BENT 90° AT THE POINT OF EGRESS, IN ONE DIRECTION, THEN RETURNED TO ITS ORIGINAL POSITION AND BENT 90° IN THE OPPOSITE DIRECTION AT THE RATE OF ONE BEND IN 2 TO 3S.
16	ACTIVE FLAMMABILITY		<p>THE CAPACITOR SHOULD BE INDIVIDUALLY WRAPPED IN AT LEAST ONE BUT NOT MORE THAN TWO COMPLETE LAYERS OF CHEESE-CLOTH. THE CAPACITOR SHOULD BE SUBJECTED TO 20 DISCHARGES. THE INTERVAL BETWEEN SUCCESSIVE DISCHARGES SHOULD BE 5 SEC. THE UAC SHOULD BE MAINTAINED FOR 2 MIN. AFTER THE LAST DISCHARGE.</p> <p>                     C1, C2: 1<math>\mu</math>F <math>\pm 10\%</math>                      C3: 0.033<math>\mu</math>F <math>\pm 5\%</math> 10KV                      Ct: 3<math>\mu</math>F <math>\pm 5\%</math> 10KV                      Cx: CAPACITOR UNDER TEST                      F: FUSE, RATED 10A                      R: 100<math>\Omega</math> <math>\pm 5\%</math>                      U<sub>c</sub>: RATED VOLTAGE                      Ut: VOLTAGE APPLIED TO Ct.                      L1 TO L4: 1.5mH <math>\pm 20\%</math> 16A ROD CORE CHOKE                 </p>
			<p>THE CHEESE-CLOTH SHOULD NOT BE ON FIRE.</p>
17	PASSIVE FLAMMABILITY	THE BURNING TIME SHOULD NOT EXCEED 30 SEC. THE TISSUE PAPER SHOULD NOT IGNITE.	<p>THE CAPACITOR UNDER TEST SHOULD BE HELD IN THE FLAME IN THE POSITION WHICH BEST PROMOTES BURNING. EACH SPECIMEN SHOULD ONLY BE EXPOSED ONCE TO THE FLAME. TIME OF EXPOSURE TO FLAME: 30 SEC.</p> <p>                     LENGTH OF FLAME: 12 <math>\pm</math> 1MM                      GAS BURNER: LENGTH 35MM MIN.                      INSIDE DIA. 0.5 <math>\pm</math> 0.1MM                      OUTSIDE DIA. 0.9MM MAX.                      GAS: BUTANE GAS PURITY 95% MIN.                 </p>

CONTINUED FROM THE PRECEDING PAGE

NO.	ITEM	SPECIFICATIONS	TESTING METHOD															
18	TEMPERATURE AND IMMERSION CYCLE	APPEARANCE	NO MARKED DEFECT															
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 20\%$															
		TAN $\delta$	<0.050															
		IR	>3000M $\Omega$															
		TV	PER ITEM 6															
			<p>THE CAPACITOR SHOULD BE SUBJECTED TO 1000 TEMPERATURE CYCLES.</p> <table border="1"> <thead> <tr> <th>STEP</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>TEMPERATURE (°C)</td> <td>-55 +0/-3</td> <td>ROOM TEMP.</td> <td>125 +3/-0</td> <td>ROOM TEMP.</td> </tr> <tr> <td>TIME (MIN)</td> <td>30</td> <td>3</td> <td>30</td> <td>3</td> </tr> </tbody> </table> <p>PRE-TREATMENT: CAPACITOR SHOULD BE STORED AT 85<math>\pm</math>2°C FOR 1H., AND THEN PLACED AT ROOM CONDITION FOR 24<math>\pm</math>2 H.</p> <p>POST-TREATMENT: CAPACITOR SHOULD BE STORED FOR 24<math>\pm</math>2 H. AT ROOM CONDITION.</p>	STEP	1	2	3	4	TEMPERATURE (°C)	-55 +0/-3	ROOM TEMP.	125 +3/-0	ROOM TEMP.	TIME (MIN)	30	3	30	3
STEP	1	2	3	4														
TEMPERATURE (°C)	-55 +0/-3	ROOM TEMP.	125 +3/-0	ROOM TEMP.														
TIME (MIN)	30	3	30	3														
19	HIGH TEMPERATURE EXPOSURE (STORAGE)	$\Delta C/C$	$\pm 20\%$															
		TAN $\delta$	<0.050															
		IR	>1000M $\Omega$															
			<p>SET THE CAPACITOR FOR 1000<math>\pm</math>12H AT 150<math>\pm</math>3°C.</p> <p>PRE-TREATMENT: CAPACITOR SHOULD BE STORED AT 125<math>\pm</math>3°C FOR 1H, THEN PLACED AT ROOM CONDITION FOR 24<math>\pm</math>2H.</p> <p>POST-TREATMENT: CAPACITOR SHOULD BE STORED FOR 24<math>\pm</math>2H AT ROOM CONDITION.</p>															
20	THERMAL SHOCK	APPEARANCE	NO MARKED DEFECT EXCEPT COLOR CHANGE OF OUTER COATING.															
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 20\%$															
		TAN $\Delta$	<0.050															
		IR	>3000M $\Omega$															
			<p>THE CAPACITOR SHOULD BE SUBJECTED TO 300 CYCLES.</p> <table border="1"> <thead> <tr> <th>STEP</th> <th>1</th> <th>2</th> </tr> </thead> <tbody> <tr> <td>TEMPERATURE (°C)</td> <td>-55+0/-3</td> <td>125+3/-0</td> </tr> <tr> <td>TIME (MIN)</td> <td>15.0<math>\pm</math>3.0</td> <td>15.0<math>\pm</math>3.0</td> </tr> </tbody> </table> <p>PRE-TREATMENT: CAPACITOR SHOULD BE STORED AT 85<math>\pm</math>2°C FOR 1H., AND THEN PLACED AT ROOM CONDITION FOR 24<math>\pm</math>2 H.</p> <p>POST-TREATMENT: CAPACITOR SHOULD BE STORED FOR 24<math>\pm</math>2 H. AT ROOM CONDITION.</p>	STEP	1	2	TEMPERATURE (°C)	-55+0/-3	125+3/-0	TIME (MIN)	15.0 $\pm$ 3.0	15.0 $\pm$ 3.0						
STEP	1	2																
TEMPERATURE (°C)	-55+0/-3	125+3/-0																
TIME (MIN)	15.0 $\pm$ 3.0	15.0 $\pm$ 3.0																
21	RESISTANCE TO SOLVENTS	APPEARANCE	NO MARKED DEFECT															
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 20\%$															
		TAN $\Delta$	<0.050															
		IR	>3000M $\Omega$															
			<p>PER MIL-STD-202 METHOD 215</p> <p>SOLVENT 1: 1 PART (BY VOLUME) OF ISOPROPYL ALCOHOL 3 PARTS (BY VOLUME) OF MINERAL SPIRITS</p> <p>SOLVENT 2: TERPENE DEFLUXER</p> <p>SOLVENT 3: 42 PARTS (BY VOLUME) OF WATER 1 PART (BY VOLUME) OF PROPYLENE GLYCOL MONOMETHYL ETHER 1 PART (BY VOLUME) OF MONOETHANOLAMINE</p>															
22	BIASED HUMIDITY	APPEARANCE	NO MARKED DEFECT															
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 20\%$															
		TAN $\Delta$	<0.050															
		IR	>3000M $\Omega$															
			<p>APPLY THE RATED VOLTAGE AND DC1.3+0.2/-0V (ADD 6.8K<math>\Omega</math> RESISTOR) AT 85<math>\pm</math>3°C AND 80 TO 85% HUMIDITY FOR 1000<math>\pm</math>12H.</p> <p>PRE-TREATMENT: CAPACITOR SHOULD BE STORED AT 125<math>\pm</math>3°C FOR 1H, THEN PLACED AT ROOM CONDITION FOR 24<math>\pm</math>2H.</p> <p>POST-TREATMENT: CAPACITOR SHOULD BE STORED FOR 24<math>\pm</math>2H AT ROOM CONDITION.</p>															
23	MOISTURE RESISTANCE	APPEARANCE	NO MARKED DEFECT															
		$\Delta C/C$	Y5P: $\pm 10\%$ Y5U: $\pm 20\%$															
		TAN $\Delta$	<0.050															
		IR	>3000M $\Omega$															
			<p>APPLY 24H OF HEAT (25 TO 65°C) AND HUMIDITY (80 TO 98%) TREATMENT SHOWN BELOW, 10 CONSECUTIVE TIMES.</p> <p>PRE-TREATMENT: CAPACITOR SHOULD BE STORED AT 125<math>\pm</math>3°C FOR 1H, THEN PLACED AT ROOM CONDITION FOR 24<math>\pm</math>2H.</p> <p>POST-TREATMENT: CAPACITOR SHOULD BE STORED FOR 24<math>\pm</math>2H AT ROOM CONDITION.</p> <p>One cycle 24 hours</p> <p>0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24</p> <p>→ Hours</p>															



**8. MEASURING AND APPLICATION NOTICE**

**8.1. MEASUREMENT NOTICE**

PLEASE MEASURE UNDER THE FOLLOWING CONDITIONS.

**8.1.1. STANDARD ATMOSPHERIC CONDITIONS**

UNLESS OTHERWISE SPECIFIED, ALL TESTS AND MEASUREMENTS SHALL BE MADE UNDER STANDARD ATMOSPHERIC CONDITIONS FOR TESTING AS GIVEN IN 5.3 OF IEC 60068-1.

TEMPERATURE, °C	RELATIVE HUMIDITY, %	AIR PRESSURE, KPA
15~35	25~75	86~106

BEFORE THE MEASUREMENTS ARE MADE, THE CAPACITOR SHALL BE STORED AT THE MEASURING TEMPERATURE FOR A TIME SUFFICIENT TO ALLOW THE ENTIRE CAPACITOR TO REACH THIS TEMPERATURE. THE PERIOD AS PRESCRIBED FOR RECOVERY AT THE END OF A TEST IS NORMALLY SUFFICIENT FOR THIS PURPOSE. TEST AND MEASUREMENT SHALL BE MADE UNDER STANDARD ATMOSPHERIC CONDITIONS FOR TESTING, IN THE EVENT OF A DISPUTE, THE MEASUREMENTS SHALL BE REPEATED USING ONE OF THE REFEREE TEMPERATURES (AS GIVEN IN 8.1.3).

WHEN TESTS ARE CONDUCTED IN A SEQUENCE, THE FINAL MEASUREMENTS OF ONE TEST MAY BE TAKEN AS THE INITIAL MEASUREMENTS FOR THE SUCCEEDING TEST.

DURING MEASUREMENTS THE CAPACITOR SHALL NOT BE EXPOSED TO DRAUGHTS, DIRECT SUNLIGHT OR OTHER INFLUENCES LIKELY TO CAUSE ERROR.

**8.1.2. RECOVERY CONDITIONS**

UNLESS OTHERWISE SPECIFIED RECOVERY SHALL TAKE PLACE UNDER THE STANDARD ATMOSPHERIC CONDITIONS FOR TESTING (8.1.1).

IF RECOVERY UNDER CLOSELY CONTROLLED CONDITIONS IS NECESSARY, THE CONTROLLED RECOVERY CONDITIONS OF 5.4.1 OF IEC 60068-1 SHALL BE USED.

UNLESS OTHERWISE SPECIFIED IN THE RELEVANT SPECIFICATION, A DURATION OF 1 H TO 2 H SHALL BE USED.


**8.1.3. REFEREE CONDITIONS**

TEMPERATURE, °C	RELATIVE HUMIDITY, %	AIR PRESSURE, KPA
25±1	48~52	86~106

FOR REFEREE PURPOSES, ONE OF THE STANDARD ATMOSPHERIC CONDITIONS FOR REFEREE TESTS TAKEN FROM 5.2 OF IEC 60068-1, AS GIVEN IN TABLE 1 BELOW, SHALL BE SELECTED:

**8.2. OPERATING VOLTAGE**

WHEN DC-RATED CAPACITORS ARE TO BE USED IN AC OR RIPPLE CURRENT CIRCUITS, BE SURE TO MAINTAIN THE VP-P VALUE OF THE APPLIED VOLTAGE OR THE VO-P WHICH CONTAINS DC BIAS WITHIN THE RATED VOLTAGE RANGE. WHEN THE VOLTAGE IS APPLIED TO THE CIRCUIT, STARTING OR STOPPING MAY GENERATE IRREGULAR VOLTAGE FOR A TRANSIT PERIOD BECAUSE OF RESONANCE OR SWITCHING. BE SURE TO USE A CAPACITOR WITH A RATED VOLTAGE RANGE THAT INCLUDES THESE IRREGULAR VOLTAGES.

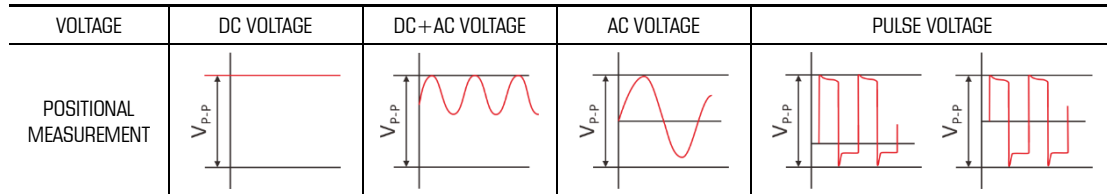

**8.3. OPERATING TEMPERATURE AND SELF-GENERATED HEAT**

KEEP THE SURFACE TEMPERATURE OF A CAPACITOR BELOW THE UPPER LIMIT OF ITS RATED OPERATING TEMPERATURE RANGE. BE SURE TO TAKE INTO ACCOUNT THE HEAT GENERATED BY THE CAPACITOR ITSELF. WHEN THE CAPACITOR IS USED IN A HIGH FREQUENCY CURRENT, PULSE CURRENT OR SIMILAR CURRENT, IT MAY HAVE SELF-GENERATED HEAT DUE TO DIELECTRIC LOSS. APPLIED VOLTAGE LOAD SHOULD BE SUCH THAT SELF-GENERATED HEAT IS WITHIN 20°C UNDER THE CONDITION WHERE THE CAPACITOR IS SUBJECTED AT AN ATMOSPHERE TEMPERATURE OF 25°C. WHEN MEASURING, USE A THERMOCOUPLE OF SMALL THERMAL CAPACITY-K OF Ø0.1MM UNDER CONDITIONS WHERE THE CAPACITOR IS NOT AFFECTED BY RADIANT HEAT FROM OTHER COMPONENTS OR WIND FROM SURROUNDINGS. EXCESSIVE HEAT MAY LEAD TO DETERIORATION OF THE CAPACITOR'S CHARACTERISTICS AND RELIABILITY. (NEVER ATTEMPT TO PERFORM MEASUREMENT WITH THE COOLING FAN RUNNING. OTHERWISE, ACCURATE MEASUREMENT CANNOT BE ENSURED.)

**8.4. TEST CONDITION FOR WITHSTANDING VOLTAGE**

**8.4.1. TEST EQUIPMENT**

TEST EQUIPMENT FOR AC WITHSTANDING VOLTAGE SHOULD BE USED WITH THE PERFORMANCE OF THE WAVE SIMILAR TO 50/60HZ SINE WAVE. IF THE DISTORTED SINE WAVE OR OVERLOAD EXCEEDING THE SPECIFIED VOLTAGE VALUE IS APPLIED, A DEFECT MAY BE CAUSED.


**8.4.2. VOLTAGE APPLIED METHOD**

WHEN THE WITHSTANDING VOLTAGE IS APPLIED, CAPACITOR'S LEAD OR TERMINAL SHOULD BE FIRMLY CONNECTED TO THE OUTPUT OF THE WITHSTANDING VOLTAGE TEST EQUIPMENT, AND THEN THE VOLTAGE SHOULD BE RAISED FROM NEAR ZERO TO THE TEST VOLTAGE (RISING SPEED 150V/S).

IF THE TEST VOLTAGE WITHOUT THE RAISE FROM NEAR ZERO VOLTAGE WOULD BE APPLIED DIRECTLY TO CAPACITOR, TEST VOLTAGE SHOULD BE APPLIED WITH THE ZERO CROSS. AT THE END OF THE TEST TIME, THE TEST VOLTAGE SHOULD BE REDUCED TO NEAR ZERO, AND THEN CAPACITOR'S LEAD OR TERMINAL SHOULD BE TAKEN OFF THE OUTPUT OF THE WITHSTANDING VOLTAGE TEST EQUIPMENT.

IF THE TEST VOLTAGE WITHOUT THE RAISE FROM NEAR ZERO VOLTAGE WOULD BE APPLIED DIRECTLY TO CAPACITOR, THE SURGE VOLTAGE MAY ARISE, AND THEREFORE, A DEFECT MAY BE CAUSED.

ZERO CROSS IS THE POINT WHERE VOLTAGE SINE WAVE PASSES 0V. SEE FIGURE AT RIGHT.



**8.5. FAIL-SAFE**


WHEN CAPACITOR WOULD BE BROKEN, FAILURE MAY RESULT IN A SHORT CIRCUIT. BE SURE TO PROVIDE AN APPROPRIATE FAIL-SAFE FUNCTION LIKE A FUSE ON YOUR PRODUCT IF FAILURE WOULD RESULT IN AN ELECTRIC SHOCK, FIRE OR FUMING.

**8.6. CAPACITANCE CHANGE OF CAPACITORS**

CAPACITORS HAVE AN AGING CHARACTERISTIC, WHEREBY THE CAPACITOR CONTINUALLY DECREASES ITS CAPACITANCE SLIGHTLY IF THE CAPACITOR IS LEFT ON FOR A LONG TIME. MOREOVER, CAPACITANCE MIGHT CHANGE GREATLY DEPENDING ON THE SURROUNDING TEMPERATURE OR AN APPLIED VOLTAGE. SO, IT IS NOT LIKELY TO BE SUITABLE FOR USE IN A CONSTANT TIME CIRCUIT.

PLEASE CONTACT US IF YOU NEED DETAILED INFORMATION.

DOC NO.:	DEC-SA-WI001
REV.:	A/0
DATE:	2020-08-14
PAGE:	9 / 10

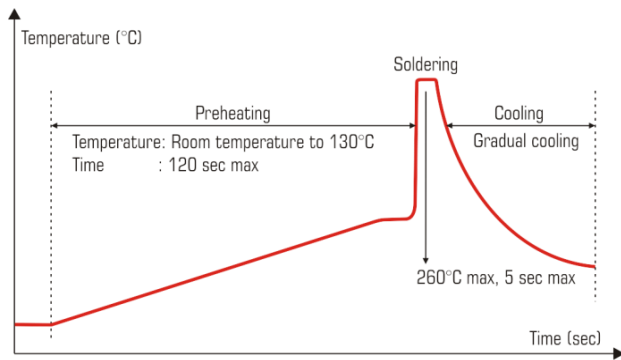
- 8.7. PERFORMANCE CHECK BY EQUIPMENT  
BEFORE USING A CAPACITOR, CHECK THAT THERE IS NO PROBLEM IN THE EQUIPMENT'S PERFORMANCE AND THE SPECIFICATIONS. GENERALLY SPEAKING, CLASS 2 (B/E/F CHAR.) CERAMIC CAPACITORS HAVE VOLTAGE DEPENDENCE CHARACTERISTICS AND TEMPERATURE DEPENDENCE CHARACTERISTICS IN CAPACITANCE. SO, THE CAPACITANCE VALUE MAY CHANGE DEPENDING ON THE OPERATING CONDITION IN THE EQUIPMENT. THEREFORE, BE SURE TO CONFIRM THE APPARATUS PERFORMANCE OF RECEIVING INFLUENCE IN THE CAPACITANCE VALUE CHANGE OF A CAPACITOR, SUCH AS LEAKAGE CURRENT AND NOISE SUPPRESSION CHARACTERISTIC. MOREOVER, CHECK THE SURGE-PROOF ABILITY OF A CAPACITOR IN THE EQUIPMENT, IF NEEDED, BECAUSE THE SURGE VOLTAGE MAY EXCEED SPECIFIC VALUE BY THE INDUCTANCE OF THE CIRCUIT.
- 8.8. OPERATING AND STORAGE ENVIRONMENT  
THE INSULATING COATING OF CAPACITORS DOES NOT FORM A PERFECT SEAL; THEREFORE, DO NOT USE OR STORE CAPACITORS IN A CORROSIVE ATMOSPHERE, ESPECIALLY WHERE CHLORIDE GAS, SULFIDE GAS, ACID, ALKALI, SALT OR THE LIKE ARE PRESENT. AND AVOID EXPOSURE TO MOISTURE. BEFORE CLEANING, BONDING, OR MOLDING THIS PRODUCT, VERIFY THAT THESE PROCESSES DO NOT AFFECT PRODUCT QUALITY BY TESTING THE PERFORMANCE OF A CLEANED, BONDED OR MOLDED PRODUCT IN THE INTENDED EQUIPMENT. STORE THE CAPACITORS WHERE THE TEMPERATURE AND RELATIVE HUMIDITY DO NOT EXCEED 5 TO 40 DEGREES CENTIGRADE AND 20 TO 70%. USE CAPACITORS WITHIN 6 MONTHS AFTER DELIVERED.
- 8.9. SOLDERING AND MOUNTING
- 8.9.1. VIBRATION AND IMPACT  
DO NOT EXPOSE A CAPACITOR OR ITS LEADS TO EXCESSIVE SHOCK OR VIBRATION DURING USE.
- 8.9.2. SOLDERING  
WHEN SOLDERING THIS PRODUCT TO A PCB/PWB, DO NOT EXCEED THE SOLDER HEAT RESISTANCE SPECIFICATIONS (260°C, 5S) OF THE CAPACITOR. SUBJECTING THIS PRODUCT TO EXCESSIVE HEATING COULD MELT THE INTERNAL JUNCTION SOLDER AND MAY RESULT IN THERMAL SHOCKS THAT CAN CRACK THE CERAMIC ELEMENT. WHEN SOLDERING CAPACITOR WITH A SOLDERING IRON, IT SHOULD BE PERFORMED IN THE FOLLOWING CONDITIONS.  
TEMPERATURE OF IRON-TIP: 320 DEGREES C. MAX.  
SOLDERING IRON WATTAGE: 40W MAX.  
SOLDERING TIME: 3.0 SEC. MAX.
- 

The graph plots Temperature (°C) on the y-axis against Time (sec) on the x-axis. It shows three distinct phases: 1. Preheating: A gradual linear increase from room temperature to 130°C, with a maximum time of 120 seconds. 2. Soldering: A sharp rise to a peak of 260°C, which is maintained for a maximum of 5 seconds. 3. Cooling: A gradual decrease from the peak temperature back to room temperature.
- Fig.: Wave-soldering temperature-time profile to recommend
- 8.9.3. BONDING, RESIN MOLDING AND COATING  
BEFORE BONDING, MOLDING OR COATING THIS PRODUCT, VERIFY THAT THESE PROCESSES DO NOT AFFECT THE QUALITY OF CAPACITOR BY TESTING THE PERFORMANCE OF THE BONDED, MOLDED OR COATED PRODUCT IN THE INTENDED EQUIPMENT. IN CASE THE AMOUNT OF APPLICATIONS, DRYNESS/HARDENING CONDITIONS OF ADHESIVES AND MOLDING RESINS CONTAINING ORGANIC SOLVENTS (ETHYL ACETATE, METHYL ETHYL KETONE, TOLUENE, ETC.) ARE UNSUITABLE, THE OUTER COATING RESIN OF A CAPACITOR IS DAMAGED BY THE ORGANIC SOLVENTS AND IT MAY RESULT, WORST CASE, IN A SHORT CIRCUIT. THE VARIATION IN THICKNESS OF ADHESIVE, MOLDING RESIN OR COATING MAY CAUSE OUTER COATING RESIN CRACKING AND/OR CERAMIC ELEMENT CRACKING OF A CAPACITOR IN A TEMPERATURE CYCLING.
- 8.9.4. CLEANING (ULTRASONIC CLEANING)  
TO PERFORM ULTRASONIC CLEANING, OBSERVE THE FOLLOWING CONDITIONS.  
RINSE BATH CAPACITY: OUTPUT OF 20 WATTS PER LITER OR LESS.  
RINSING TIME: 5 MIN. MAXIMUM.  
DO NOT VIBRATE THE PCB/PWB DIRECTLY.  
EXCESSIVE ULTRASONIC CLEANING MAY LEAD TO FATIGUE DESTRUCTION OF THE LEAD WIRES.

**9. TAPING SPECIFICATIONS**


■ **MODE 1**  
AS SHOWN IN THE FOLLOWING FIGURE:

12.7MM BY FEED HOLE PITCH (P0) AND COMPONENTS PITCH (P)  
OR, 15.0MM BY FEED HOLE PITCH (P0) AND COMPONENTS PITCH (P)

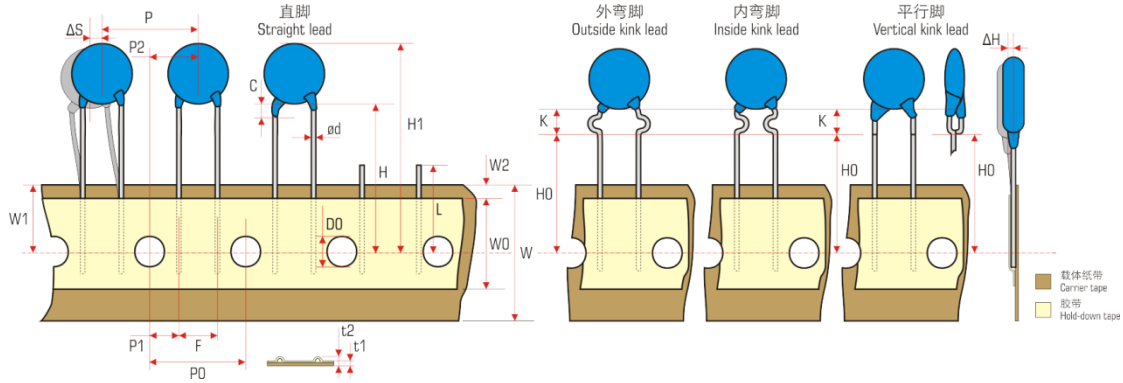

■ **MODE 2**  
AS SHOWN IN THE FOLLOWING FIGURE:

FEED HOLE PITCH (P0) WITH 12.7MM AND COMPONENTS PITCH (P) WITH 25.4MM

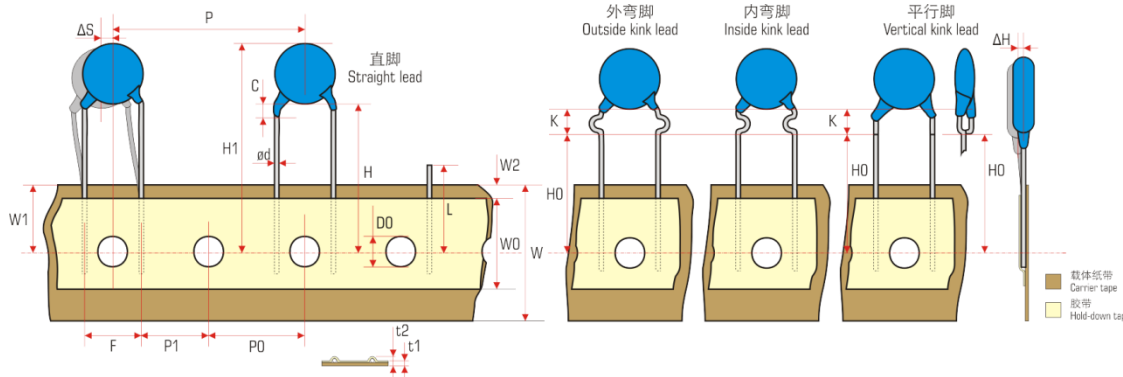

■ **DIMENSIONS (MM)**

ITEM	SYMBOL	SPECIFICATIONS		TOLERANCE
		MODE 1	MODE 2	
HOLE CENTER TO COMPONENT CENTER	P2	6.35	7.5	±1.3
FEED CENTER TO LEAD	P1	3.85	3.85	±0.7
FEED HOLE PITCH	P0	12.7	12.7	±0.3
COMPONENT PITCH	P	12.7	25.4	±1.0
LEAD TO LEAD DISTANCE	F	5.0	10.0	±0.8

ITEM	SYMBOL	SPECIFICATIONS	TOLERANCE		
				HEIGHT OF KINK	K
COATING ROUNDOFF ON LEADS	C	3.0	MAX		
SNIPPED LENGTH	L	11.0	MAX		
TOTAL TAPE, TAPE AND LEAD WIRE	T2	1.5	MAX		
TOTAL TAPE THICKNESS	T1	0.9	MAX		
FEED HOLE DIAMETER	D0	4.0	±0.3		
COMPONENT HEIGHT	H1	40.0*	MAX		
HEIGHT OF COMPONENT FROM TAPE CENTER	H	KINK LEAD TYPE	H0	16.0	±0.5
		STRAIGHT LEAD TYPE	H	18.0	+2.0 -0
HOLD-DOWN TAPE POSITION	W2	3.0	MAX		
HOLE POSITION	W1	9.0	+0.75 -0.5		
HOLD-DOWN TAPE WIDTH	W0	7.0	MIN		
TAPE WIDTH	W	18.0	+1.0 -0.5		
DEVIATION ALONG TAPE, FRONT OR BACK	ΔH	2.0	MAX		
DEVIATION ALONG TAPE, LEFT OR RIGHT	ΔS	1.3	MAX		
LEAD WIRE DIAMETER	ΦD	0.55	±0.1		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Safety Capacitors](#) category:*

*Click to view products by [Dersonic](#) manufacturer:*

Other Similar products are found below :

[R49AN347000A1K](#) [B32022B3223K026](#) [B32912A3104K026](#) [46KI3470DQM1K](#) [B32913A3154K](#) [MKPY2-.02230020P15](#) [46KN333000M1M](#)  
[DE1E3KX222MJ4BN01F](#) [46KN347000M1M](#) [46KR422000M1K](#) [B32924C3824K189](#) [46KI3100DQM1M](#) [HUB2200-S](#) [HUB820-P](#) [BFC2](#)  
[33910103](#) [46KN3330JBM1K](#) [463I333000M1K](#) [46KF2470JBN0M](#) [46KF268000M1M](#) [46KI22205001M](#) [46KI24705201K](#) [46KI2470CK01M](#)  
[46KI2470ND01K](#) [46KI2680JH01M](#) [46KI315000M2K](#) [46KI3150CKM2K](#) [46KI3150CKM2M](#) [46KI3150NDM2M](#) [46KI3220JLM1M](#)  
[46KN3150JH01K](#) [46KN34705001K](#) [46KN347050N0K](#) [46KN3470JHP0M](#) [46KN410040H1M](#) [46KN415000P1M](#) [46KW510050M1K](#)  
[474I24700003K](#) [PHE840MD6220MD13R30](#) [PHE840MY6470MD14R06](#) [PHE845VD5470MR06](#) [R463N4100ZAM1K](#) [46KR410050M1K](#)  
[YV500103Z060B20X5P](#) [MKPX2R-1/400/10P27](#) [YP500101K040B20C2P](#) [YU0AH222M090DAMD0B](#) [LS1808N102K302NX080TM](#)  
[ERK610Z472MCRU](#) [R463F210000N0K](#) [R463I26800001K](#)