
STATSHIELD® 81705 SERIES



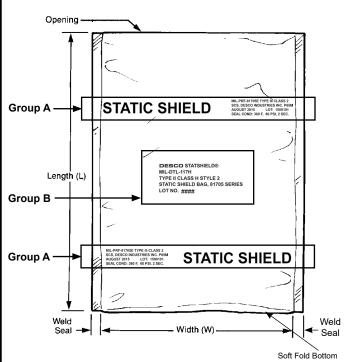

Specifications:

Standard Document
MIL-PRF-81705E

Electrical Properties

MIL-PTC-01703

Meets Requirements of:

Type III, Class 2

Type II, Class H, Style 2

Typical Values

Surface Resistance:

Outer Surface

Inner Surface $1 \times 10^{12} \text{ ohms/sq}$ $2 \times 1 \times 10^{12} \text{ ohms/sq}$ Discharge Shielding $1 \times 10^{12} \text{ ohms/sq}$ $1 \times 10^{12} \text{ ohms/sq}$ $1 \times 10^{12} \text{ ohms/sq}$

EMI Attenuation ≥ 10 db Static Decay ≤ 2 seconds **Test Procedures/Method**

MIL-PRF-81705E, 4.6.8 MIL-PRF-81705E, 4.6.8 MIL-PRF-81705E, 4.6.9 MIL-PRF-81705E, 4.6.7 MIL-STD-3010, 4046

Physical Properties

Film Thickness
Tensile Strength
Puncture Resistance
Non-corrosive
Marking Abrasion Resistance
Transparency


2.8 mils, 0.071 mm ± 10% 4600 PSI, 32 MPa 12 lbs, 53 N Pass Pass 40% MIL-STD-3010, 1003

ASTM D882

MIL-STD-3010, 2065 MIL-STD-3010, M3005* MIL-PRF-81705E, 4.6.6 MIL-STD-3010, 4034

Heat Sealing Conditions

Temperature 360°F, 182°C
Time 2 seconds
Pressure 60 PSI, 414 KPa



Note: Default hot stamp color is yellow. Artwork not to scale.

RoHS 2, REACH, and Conflict Minerals Statement See the Desco Industries RoHS 2, REACH, and Conflict Minerals Statement:

http://www.descoindustries.com/ROHS2.aspx

See the Desco Limited Warranty:

http://desco.descoindustries.com/Limited-Warranty.aspx

Markings: Group A

Material identification printed between polyester and aluminum shielding layer. Specification number, type, class, manufacturer's name, manufacturer's designation, month and year of manufacture, lot number and heat sealing conditions (temperature, pressure and dwell time). Not shown to scale. Color: black. Appears every 6 inches along length of the material. Meets marking requirements of MIL-PRF-81705E: 3.6

Group B

Identification hot stamped on surface layer. Specification number, revision letter, type, class, manufacturer's name, manufacturer's designation, and lot number. Not shown to scale. Color: yellow. Meets marking requirements of MIL-DTL-117H: 3.5 for converted bags.

This product is on the Qualified Product Listing under the Defense Standardization Program. Check our listing here.

*Passes on all surfaces noted in MIL-PRF-81705E Special Requirement 6/ Bag is free of silicones and heavy metals. Specifications and procedures subject to change without notice.

STATSHIELD® 81705 SERIES

Made in the United States of America



DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: <u>Desco.com</u> PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407 PHONE (781) 821-8370

DRAWING NUMBER 12910 DATE January 2017

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Other Tools category:

Click to view products by Desco manufacturer:

Other Similar products are found below:

CR-05FL7--150R CR-05FL7--698K 899-2-KT46 899-5-KT46 CR-0AFL4--332K CR-12FP4--260R CRCW04021100FRT7

CRCW04021961FRT7 5800-0090 CRCW04024021FRT7 CRCW040254R9FRT7 CRCW0603102JRT5 59065-5 00-8273-RDPP 00-8729WHPP 593033 593058 593072 593564100 593575 593591 593593 011349-000 CRCW08052740FRT1 LUC-012S070DSM LUC018S070DSP 599-2021-3-NME 599-JJ-2021-03 00-5080-YWPP 5E4750/01-20R0-T/R LW1A-L1-GL LW1A-P1-GD LW1L-A1C10V-GL
LW1L-M1C70-A 0202-0173 00-9089-RDPP 00-9300-RDPP CRCW2010331JR02 01-1003W-8/32-10 601-GP-08-KT39 601-JJ-06 601-SPB
601YSY 602-JJ-03 602SPB 602Z 603-JJ-07-FP 603-JJY-04 604J 604-JJ-05