



# STATFREE® B2 PLUS DISSIPATIVE VINYL

## Specifications

### Standard Document

ANSI/ESD S20.20

### Meets Requirements of:

Worksurface

### Electrical Properties

#### Dissipative Surface Layer

Rtt Resistance:

$1 \times 10^6$  to  $< 1 \times 10^9$  ohms

Rtg Resistance:

$1 \times 10^6$  to  $< 1 \times 10^9$  ohms

### Test Procedures/Method

ANSI/ESD STM4.1 and ESD TR53

ANSI/ESD STM4.1 and ESD TR53

#### Ground Plane Layer

Rtt Resistance:

$< 1 \times 10^6$  ohms

ANSI/ESD STM4.1 and ESD TR53

### Physical Properties

Construction:

Multi-layer vinyl, dissipative top layer, reinforced conductive bottom layer

Thickness:

0.080" (2 mm), nominal  $\pm 10\%$

Color:\*

Blue or Green (top side), Black (bottom side)


Texture:\*

KidGrain (top side), Textured (bottom side)

Hardness:

$85 \pm 5$  Shore "A", per ASTM-D2240

\*Color and texture may vary between lots and mills

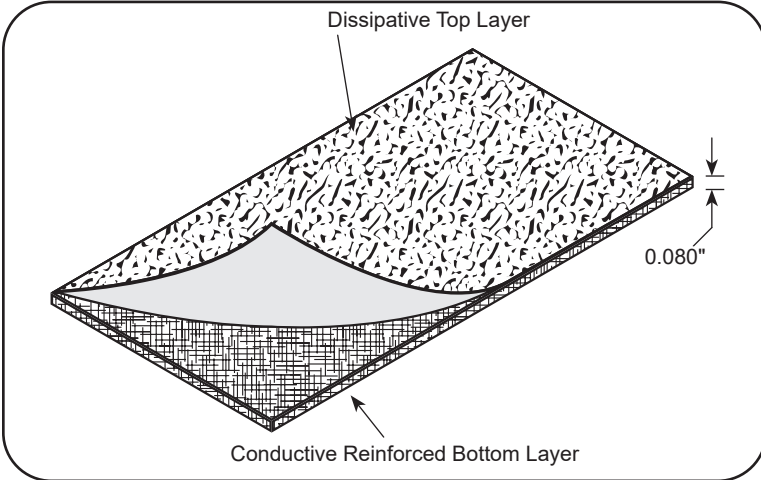

### Grounding & Cleaning

If the material is used on top of an already properly grounded surface, [grounding hardware](#) may not be necessary. Where no properly grounded surface is available, [grounding hardware](#) is required to provide a path-to-ground. Rtg compliance verification measurements must be made as outlined in ESD TR53 with a [surface resistance meter](#).

See Tech Bulletin [TB-7062](#) for Reztore® Alcohol-Free Surface & Mat Cleaner - Application Instructions.

### Limited Lifetime Warranty:

Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by [Desco Limited Warranty](#).

### Desco Regulatory Statement

See the Desco Industries Regulatory Statement:  
<http://www.descoindustries.com/pdf/Regulatory.pdf>

See the Desco Limited Warranty:  
<http://desco.descoindustries.com/Limited-Warranty.aspx>

See the Desco Disclaimer:  
<http://desco.descoindustries.com/Disclaimer.aspx>

Specifications and procedures subject to change without notice.

### Tolerances:

Width  $\pm 0.250$ "

Length  $\pm 0.250$ " every 1 linear foot of running material.

Thickness  $\pm 10\%$

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to condition for at least 4 hours before cutting to size. Always using care, trim with a sharp knife or razor blade.

For product listings, [Click Here](#)



Made in the United States of America

\*\*Tray liners have 3/4" radius corners and do not include grounding hardware.

## STATFREE® B2 PLUS 2-LAYER VINYL ESD MATTING, 0.080" THICKNESS

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](http://Desco.com)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

STATFREE® B2 PLUS  
DRAWING PM-134

DATE:  
February  
2024

# DESCO

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antistatic Control Products](#) category:*

*Click to view products by [Desco](#) manufacturer:*

Other Similar products are found below :

[14404](#) [2202SP](#) [37061](#) [42470](#) [09813](#) [09857](#) [09037](#) [09086](#) [09813](#) [68101](#) [68103](#) [98132](#) [73741](#) [13457](#) [13245](#) [13420](#) [13205](#) [91070](#) [66085](#)  
[13080](#) [010-0115](#) [13390](#) [09121](#) [07501](#) [09204](#) [66086](#) [66121](#) [16316](#) [13331](#) [ZJ-SD100](#) [1900-8X12](#) [1910-10X12](#) [82A3](#) [1900-6X8](#) [1900-7-15](#)  
[19866](#) [20-082-1012](#) [STS1327](#) [STW404111](#) [20-871-1418](#) [20-871-1624](#) [20-871-1818](#) [20-871-1824](#) [20-872-1418](#) [53707](#) [ELSEC 5/10](#) [52889](#)  
[52867](#) [52865](#) [52849](#)