
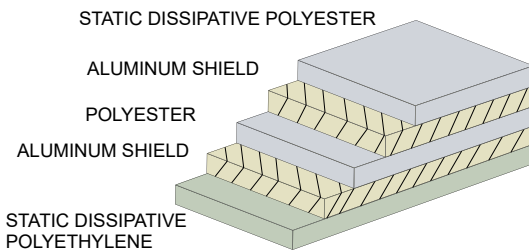


Moisture Barrier Bag Dri-Shield® 2000

This aluminized moisture barrier bag is designed to provide packaging for ESD and moisture sensitive items, both inside and outside an ESD protected area. The bags are heat sealable and suitable for vacuum packaging. Bags are printed with ESD and moisture warning symbols and a lot code for traceability.

SCS Moisture Barrier Bags Dri-Shield® 2000 are manufactured from a laminate of multiple layers of aluminized polyester and polyethylene. Polyester provides puncture resistance. Metal layers are intended to provide shielding of Electrostatic Discharge (ESD) and to help minimize the penetration of electric field while providing moisture protection.

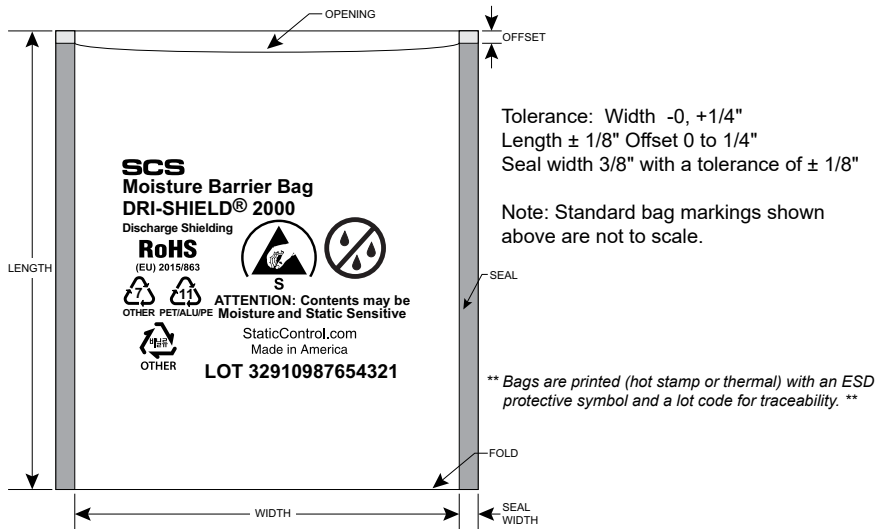

SCS Moisture Barrier Bags are packaged in a polyethylene bag.

RoHS, REACH, and Conflict Minerals Statement

See the SCS RoHS, REACH and Conflict Minerals Statement:
http://staticcontrol.com/PDF/Regulatory_Statement_SCS_Bags.pdf

See the SCS Limited Warranty:
StaticControl.com/Limited-Warranty.aspx

Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3 (except Transparency)



Made in the United States of America

| Physical | Typical Value | Testing Method |
|---|--|---------------------------|
| Moisture Vapor Transmission Rate (MVTR) | ≤0.035 grams/100 sq. in./24 hrs | MIL-STD-3010C Method 3030 |
| Tensile Strength | 7800 PSI, 54 MPa | ASTM D882 |
| Puncture Resistance | 20 lbs, 89 N | MIL-STD-3010 Method 2065 |
| Seal Strength | 15 lbs, 66 N | ASTM D882 |
| Thickness | 3.6 mils, 0.0914 mm ±10% | MIL-STD-3010 Method 1003 |
| Marking Adhesion | Pass | IPC-TM-650 2.4.1 |
| Electrical | Typical Value | Testing Method |
| ESD Shielding | <10 nJ | ANSI/ESD STM11.31 |
| Surface Resistance - Interior | 1 x 10 ⁴ to < 1 x 10 ¹¹ ohms | ANSI/ESD STM11.11 |
| Surface Resistance - Exterior | 1 x 10 ⁴ to < 1 x 10 ¹¹ ohms | ANSI/ESD STM11.11 |
| EMI Attenuation | 45 dB | 1 to 10 GHz |
| Cleanliness | Typical Value | Testing Method |
| Silicone | Not Detected | FTIR |
| Heat Sealing Conditions | Typical Value | |
| Temperature | 300°F - 400°F, 140°C - 204°C | |
| Time | 0.6 – 4.5 seconds | |
| Pressure | 30 – 70 PSI, 206 – 482 KPa | |

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

NOTE: The complete dry package concept of packaging for electronics requires three elements:

- [Moisture Barrier Bags](#) - To Protect
- [Desiccants](#) - To Absorb Moisture
- [Humidity Indicator Cards](#) - To Monitor Performance

Unless otherwise noted, ±10%

Specifications and procedures subject to change without notice.

| DRI-SHIELD® 2000 MOISTURE BARRIER BAG | | |
|--|---|-------------------------------|
| 926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000 | DRAWING NUMBER Dri-Shield® 2000 | DATE September 2021 |



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antistatic Control Products](#) category:

Click to view products by [Desco](#) manufacturer:

Other Similar products are found below :

[13020](#) [13490](#) [13870](#) [13879](#) [13881](#) [13883](#) [13882](#) [14404](#) [2202SP](#) [3039](#) [37061](#) [42470](#) [09060](#) [09857](#) [42516](#) [37059](#) [04563](#) [17252](#) [19691](#)
[19695](#) [09037](#) [09826](#) [09813](#) [66070](#) [100816](#) [68101](#) [68103](#) [98132](#) [73741](#) [13868](#) [13485](#) [13457](#) [13245](#) [13468](#) [13420](#) [13332](#) [13205](#) [13135](#)
[91070](#) [8031](#) [8523](#) [66085](#) [40931](#) [37081](#) [13080](#) [13215](#) [13806](#) [73749](#) [010-0225](#) [17260](#)