



Made in the
United States of America

Description

stat-A-REST™ Foot Grounders provide contact with ESD flooring providing a more continuous and reliable path-to-ground to remove electrostatic charges. stat-A-REST™ are easier to install than most foot grounders, designed to be used on standard shoes placing the grounding tab in the shoe under the foot. It is a suitable ESD footwear component in a Footwear / Flooring System meeting the ANSI/ESD S20.20 required limits $< 1 \times 10^9$ ohms (footwear) per ESD SP9.2 and ESD TR53 and Footwear / Flooring requirements of $< 3.5 \times 10^7$ ohms per ANSI/ESD STM97.1 and < 100 volts per ANSI/ESD STM97.2.

Components

- A. Non-Marring Thermoplastic Elastomer (TPE)
- B. 30 Inch Conductive 8-Strand Nylon Polyester Grounding Tab
- C. Size molded on bottom of unit

Electrical Properties

Property	Test Method	Value
Point to Groundable	ANSI/ESD STM97.1, ESD SP9.2, ESD TR53	$< 1 \times 10^9$ ohms
Point Resistance:		

See independent test lab report [here](#).

Specifications

Item	SAR-S	SAR-M	SAR-L	SAR-XL
Size	Small	Medium	Large	XLarge
Length	9.5"	10.25"	11"	11.75"
Width	3.25"	3.75"	4.375"	4.625"
Shoe Size Women	5-8	8.5-10.5	11-13.5	13.5+
Shoe Size Men	4-6	6.5-8.5	9-12	12.5-14.5
Shoe Size EU	35-38	39-43	44-46	46-48

Sold in pairs


Specifications and procedures subject to change without notice.

stat-A-REST™ FOOT GROUNDERS

926 JR Industrial Drive, Sanford, NC 27332
 WEB SITE: StaticControl.com
 PHONE (919) 718-0000

**DRAWING
NUMBER**
SAR-S

DATE
July
2015

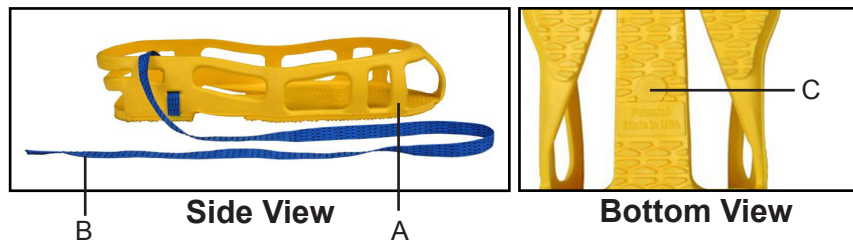

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

"All personnel shall be bonded or electrically connected to the grounding / equipotential bonding system when handling ESDS [ESD sensitive] items. ...For standing operations, personnel shall be grounded via a wrist strap or by a footwear/flooring system." [ANSI/ESD S20.20 section 8.2 Personnel Grounding]

"If the contact area between the bottom of the foot and the floor is not continuous, charge generation may occur; especially when a person is walking. Heel straps must be worn on both feet to minimize the amount of time that the body of the person is isolated from ground while walking." [ESD Handbook ESD TR20.20 section 5.2.3 Flooring-Footwear System]

*Patent US008189318B2

Unless otherwise noted, tolerance +/- 10%

SCS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antistatic Control Products](#) category:

Click to view products by [Desco](#) manufacturer:

Other Similar products are found below :

[13020](#) [13490](#) [13870](#) [13879](#) [13881](#) [13883](#) [13882](#) [14404](#) [2202SP](#) [3039](#) [37061](#) [42470](#) [09060](#) [09857](#) [42516](#) [37059](#) [04563](#) [17252](#) [19691](#)
[19695](#) [09037](#) [09826](#) [09813](#) [66070](#) [100816](#) [68101](#) [68103](#) [98132](#) [73741](#) [13868](#) [13485](#) [13457](#) [13245](#) [13468](#) [13420](#) [13332](#) [13205](#) [13135](#)
[91070](#) [8031](#) [8523](#) [66085](#) [40931](#) [37081](#) [13080](#) [13215](#) [13806](#) [73749](#) [010-0225](#) [17260](#)