


Model(型號): DS-03-R-T 2.54mm 3POS DIP


KE Switches



※ Features:

- ▶ Lowest contact resistance less than 50mΩ.
- ▶ Gold-plated contact provides high reliability.
- ▶ All materials are UL 94V0 grade, high temperature resistant plastic.
- ▶ All DIP switches Packaging are IC TUBES and the switches are OFF state.
- ▶ Shell colour: Red or Blue or Black.

※ Dimensions(規格圖): DS Series

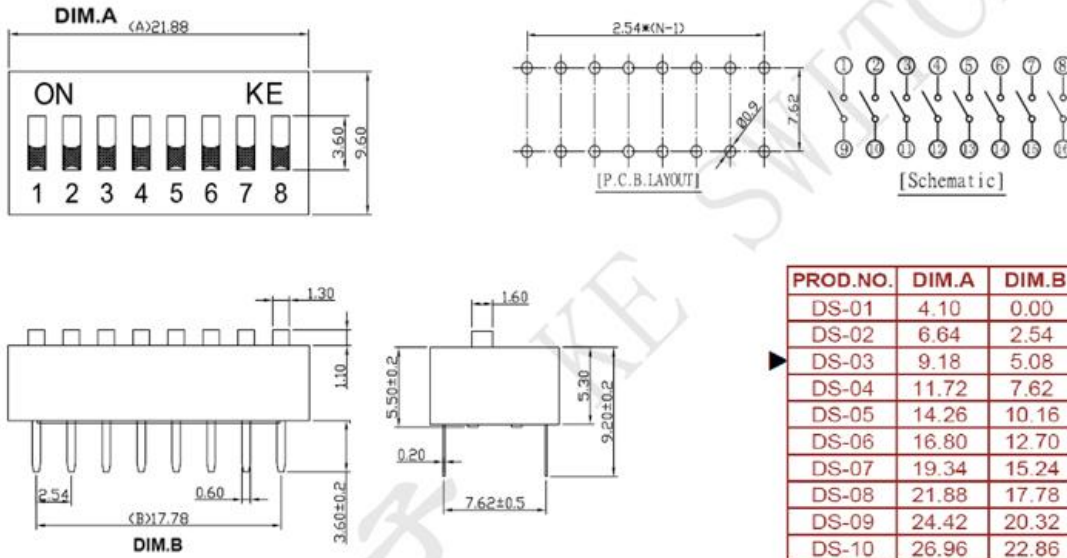

PROD.NO.	DIM.A	DIM.B
DS-01	4.10	0.00
DS-02	6.64	2.54
DS-03	9.18	5.08
DS-04	11.72	7.62
DS-05	14.26	10.16
DS-06	16.80	12.70
DS-07	19.34	15.24
DS-08	21.88	17.78
DS-09	24.42	20.32
DS-10	26.96	22.86
DS-12	32.04	27.94

※ Specifications(規格)

● Electrical Characteristics [電氣性能]	
Positions [位數]	▶ <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 12
Contact Rating [触点容量]	▶ Switching: DC24V 25mA Non-Switching: DC50V 100mA
Contact resistance [接觸阻抗]	▶ 50mΩ Max at initial ; 100mΩ Max after life test
Insulation resistance [絕緣阻抗]	▶ 1000MΩ Min at DC500V
Dielectric strength [耐電壓]	▶ 1 minute at AC 500VAC
Wave soldering [波峰焊]	▶ 255±5°C for 3----5 Seconds
● Mechanical Characteristics [機械性能]	
Circuit [開關形式]	▶ SPST
Operation force [動作力]	▶ 1000gf Max
Operating Temperature Range [工作溫度範圍]	▶ -30°C~85°C
Storage Temperature Range [儲存溫度範圍]	▶ -40°C~85°C
Packing Specifications [包裝規格]	▶ 53 PCS / Tube, 2650 PCS / Box
● Endurance Characteristics [耐久性能]	
Mechanical life [機械壽命]	▶ 3,000 Cycles Operations

Http://www.kswitch.com

Email:kswitch@126.com

TEL:(86)0769-82633166

FAX:(86)0769-82633255

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [DGI manufacturer](#):

Other Similar products are found below :

[78M03S](#) [79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [A7SS-M](#) [DBP 2110](#) [DBP 2112](#) [DBS1008](#) [DHN02FTVTR](#) [DHN10T](#) [DHS108](#)
[DPL08TN](#) [DRD16CSE04](#) [DRR4010](#) [DRR60016](#) [DRS4016](#) [BD06E](#) [1825008-1](#) [1825444-1](#) [25.350.0653.0](#) [LA2-DC12](#) [SBS 5004 TG](#)
[SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [2161391-1](#) [2-1825058-8](#) [CCVA 2.5/ 4-G-5.08](#) [P26THRR32](#)
[25.330.0653.1](#) [25.352.0353.0](#) [MDG305ST](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DBP2008](#) [DBS1003](#) [DBS2008](#) [438872000](#)
[DRD10CRAE04](#) [DRS1604](#) [DSR02T](#) [DSS 208 N](#) [5-1825033-1](#) [106-SDN06-EV](#) [1-1437507-6](#) [E2FMX2D1M1TGJ03M](#)
[E3ZMCT81M1TJ03M](#)