
5.8mm Round **mic**ED** Optopipe** Optical Light Pipe, Single



515-1038

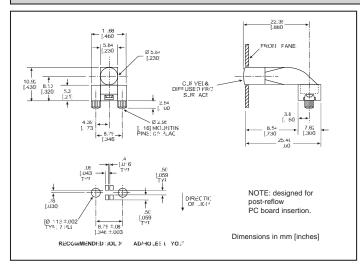

MicroLED SMT LEDs for use with 515-1038

PART NO.	PAGE #
Recommended	
597-3xx1-2xx	1-21
597-77x1-2xx	1-23 & 1-24
Alternatives	
597-3xx1-1xx	1-19
597-3xx1-4xx	1-28
597-3xx1-5xx	1-30
597-77x1-1xx	1-20
597-77x1-5xx	1-31

LED alternatives may not produce optimum light output

Solder Pad/Holes layout shown is for bi-color LEDs listed under "Recommended" category Contact factory for other layouts

Features

- · High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- · Wide viewing angle
- · Secures to PCB by press-fit

LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

Operating/Storage Temperature

-30°C to +100°C

Dialight Optopipe® Light Pipe Description

This Optopipe® is a shorter version of 515-1039. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe® solutions for your applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Light Pipes category:

Click to view products by Dialight manufacturer:

Other Similar products are found below:

1367627-1 SLP3-300-450-F SLP3-400-450-R LPA-C011301S-23 LPA-C011301S-6 LPF-C011306S FLP25-1.95 VLP-640-F LPA-C011301S-5.4 LPA-C041301S-2 LPA-R051171S-12 LPA-S011331S 515-1027-803F 515-1217F SLP3-150-300-R SLP3-500-450-R 515-1064-810F FLPV-SG BDL-1187 7511A41 7511A87-500 FLPV-SBC 5151064802F 5151-192-0055-0DF LPF-R011340S 515-1166-801F FLPF-6.0 SLP3-350-200-F PM4-C1522-3.70 LC-11.25 CLP-1214 515-1064-808F FLX3_05 515-1192-0025-0DF 515-1192-80-3DF PBLP-1001-1 LC2-4.1 LPC062CTP LSS024CTP LPC088CTP SLP3-150-300-F 2202312 515-1302-0500F RLP1-200-800 RLP1-400-500 LPA-C011301S-15 2202311 SLP3-150-450-R 7511A53 1270.1003