




#### **Dimensions**

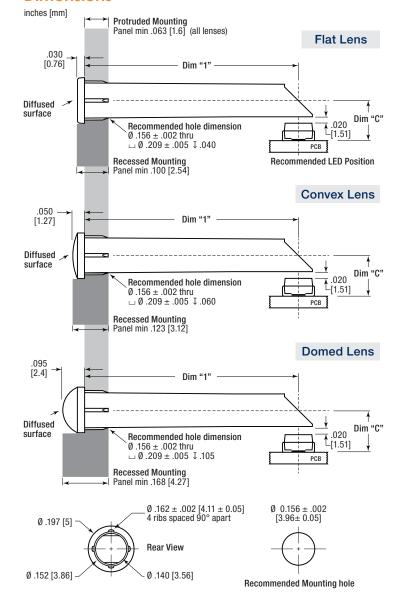

# Optopipe® Light Pipes Right Angle Vertical Panel Mount

**5mm Diameter Output** 

#### **Features & Benefits**

- Lengths varying from .250"–1.500"
- Flat, Convex and Domed lens options with diffused textured finish
- Designed for both single and multiple colored LEDs
- Precision molded from ROHS compliant UL94-V0, water clear polycarbonate with oxygen index of 35%
- Halogen-free PC material
- Optimally designed to be used with Dialight surface mount LEDs; see Surface Mount Selector Guide for LED options
- Recommend PLCC-2 and PLCC-4, surface mount LEDs part # 597-XXXX-207F

### **Application**

Dialight's Right Angle Vertical Panel Mount Optopipe® Light Pipes provide an excellent solution for products that contain a PCB that is perpendicular to the front panel. The UL94-V0 water clear polycarbonate light pipes are secured to the front panel with a press fit that is easy to install. Dialight Optopipe® Light Pipes are a cost effective way of bringing indication to your front panel.

#### **Mechanical Information**

Mounting Hole Size:  $.156" \pm .002"$ Min. Panel Thickness: .063" (1.6 mm) Operating Temp: -40°C to +100°C Storage Temp: -40°C to +100°C





## **Ordering Information 515 Series**

#### **Flat**

#### Dialight P/N Dim "C" 515-1361-0250F .190 [4.83] .165 [4.19] 515-1361-0350F .290 [7.37] .165 [4.19] 515-1361-0375F .315 [8.00] .165 [4.19] 515 1361-0500F .440 [11.18] .165 [4.19] 515-1361-0625F .565 [14.35] .165 [4.19] 515-1361-0750F .690 [17.53] .165 [4.19] 515-1361-0800F .740 [18.80] .165 [4.19] 515-1361-0900F .840 [21.34] .165 [4.19] 515-1361-1050F .990 [25.15] .165 [4.19] 515-1361-1250F 1.19 [30.23] .165 [4.19] 515-1361-1500F 1.44 [36.58] .165 [4.19]

#### Convex

Dialight P/N	Dim "1"	Dim "C"
515-1362-0250F	.190 [4.83]	.165 [4.19]
515-1362-0350F	.290 [7.37]	.165 [4.19]
515-1362-0375F	.315 [8.00]	.165 [4.19]
515-1362-0500F	.440 [11.18]	.165 [4.19]
515-1362-0625F	.565 [14.35]	.165 [4.19]
515-1362-0750F	.690 [17.53]	.165 [4.19]
515-1362-0800F	.740 [18.80]	.165 [4.19]
515-1362-0900F	.840 [21.34]	.165 [4.19]
515-1362-1050F	.990 [25.15]	.165 [4.19]
515-1362-1250F	1.19 [30.23]	.165 [4.19]
515-1362-1500F	1.44 [36.58]	.165 [4.19]

#### **Domed**

Dialight P/N	Dim "1"	Dim "C"
515-1363-0250F	.190 [4.83]	.165 [4.19]
515-1363-0350F	.290 [7.37]	.165 [4.19]
515-1363-0375F	.315 [8.00]	.165 [4.19]
515-1363-0500F	.440 [11.18]	.165 [4.19]
515-1363-0625F	.565 [14.35]	.165 [4.19]
515-1363-0750F	.690 [17.53]	.165 [4.19]
515-1363-0800F	.740 [18.80]	.165 [4.19]
515-1363-0900F	.840 [21.34]	.165 [4.19]
515-1363-1050F	.990 [25.15]	.165 [4.19]
515-1363-1250F	1.19 [30.23]	.165 [4.19]
515-1363-1500F	1.44 [36.58]	.165 [4.19]

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Light Pipes category:

Click to view products by Dialight manufacturer:

Other Similar products are found below:

1367627-1 SLP3-300-450-F SLP3-400-450-R LPA-C011301S-23 LPA-C011301S-6 LPF-C011306S FLP25-1.95 VLP-640-F LPA-C011301S-5.4 LPA-C041301S-2 LPA-R051171S-12 LPA-S011331S 515-1027-803F 515-1217F SLP3-150-300-R SLP3-500-450-R 515-1064-810F FLPV-SG BDL-1187 7511A41 7511A87-500 FLPV-SBC 5151064802F 5151-192-0055-0DF LPF-R011340S 515-1166-801F FLPF-6.0 SLP3-350-200-F PM4-C1522-3.70 LC-11.25 CLP-1214 515-1064-808F FLX3\_05 515-1192-0025-0DF 515-1192-80-3DF PBLP-1001-1 LC2-4.1 LPC062CTP LSS024CTP LPC088CTP SLP3-150-300-F 2202312 515-1302-0500F RLP1-200-800 RLP1-400-500 LPA-C011301S-15 2202311 SLP3-150-450-R 7511A53 1270.1003