


5mm 5V LED CBI® Circuit Board Indicator Bi-Level For Backlighting



552-22xx-100

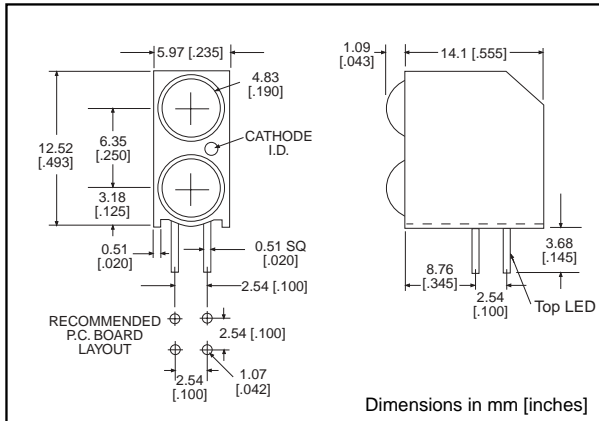

Standard Polarity shown in drawing: Cathode right

PART NO.

**HIGH EFFICIENCY, TINTED,
NON DIFFUSED**

- 552-2211-100
- 552-2222-100
- 552-2223-100
- 552-2232-100
- 552-2233-100

COLOR*

- Red-Red
- Green-Green
- Green-Yellow
- Yellow-Green
- Yellow-Yellow

* Top-Bottom LED

**Reverse Polarity (Cathode Left) option available.
See Part Number Ordering Code.**

Features


- Multiple CBIs form horizontal LED arrays on 6.35mm (0.250") center-lines.
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 32%
- Polymer content: PBT, 0.845 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN-60825-1

Tolerance note: As noted, otherwise:

- LED Protrusion: ± 0.04 mm [± 0.016]
- CBI Housing: ± 0.02 mm [± 0.008]

Custom Combinations

- Contact factory for information on custom color combinations and ganged arrays

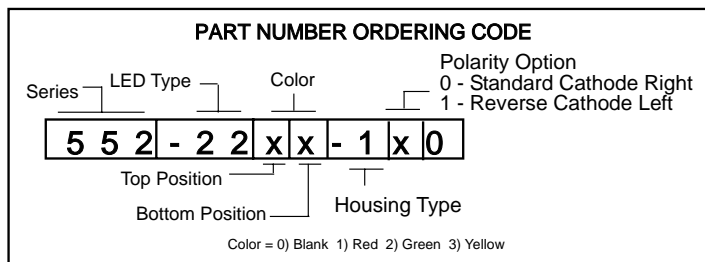

6

Typical Operating Characteristics ($T_A=25^\circ\text{C}$)

See LED data sheet for additional information
See page 6-55 and 6-56 for Reference Only LED Drive Circuit Examples. See page 6-58 for Pin Out

Color	Peak Wavelength nm	I_v mcd	V_f Volts	Test Current (mA)	Viewing Angle $2\theta_{\%}$	LED Data sheet	Page #
Red	650	110	2.1	20	30°	5HN-9419	6-50
Green	565	110	2.2	20	30°	5HN-9420	6-50
Yellow	585	110	2.2	20	30°	5HN-9421	6-50

5mm
High Efficiency
Tinted, Non-Diffused

Dialight
5HN-xxxx

*** NOT A VALID PART
NUMBER. THIS SHEET IS FOR
REFERENCE ONLY.**

TYPE	COLOR
*5HN-9419	Red
*5HN-9420	Green
*5HN-9421	Yellow

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)	Red -9419	Green -9420	Yellow -9421
Power Dissipation (mW)	75	75	75
Derating (mW/ $^\circ\text{C}$) From 50 $^\circ$	1.5	1.5	1.5
Forward Current (mA)	25	25	25
Peak Current (mA) Pulse Width = 1 μs	60	60	60
Operating Temperature ($^\circ\text{C}$)	-55/+100	-55/+100	-55/+100
Storage Temperature ($^\circ\text{C}$)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260 $^\circ\text{C}$, 5 seconds, 1.6 mm from case		

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS ($T_A=25^\circ\text{C}$)		Red -9419	Green -9420	Yellow -9421
Luminous Intensity (mcd)	Min.	56	56	56
	Typical	110	110	110
Peak Wavelength (nm) λ Peak	Typical	650	565	565
Viewing Angle (2θ $^\circ$)		30 $^\circ$	30 $^\circ$	30 $^\circ$
Forward Voltage (V)	Typical	2.1	2.2	2.2
	Max	2.55	2.55	2.55
Reverse Voltage (V), $I_R=100\mu\text{A}$	Min.	5	5	5

θ is the off axis angle at which the luminous intensity is half the axial luminous intensity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Circuit Board Indicators](#) category:

Click to view products by [Dialight](#) manufacturer:

Other Similar products are found below :

[568-0701-841F](#) [LTL-4221NH129](#) [LTL-42DGNMHDP1](#) [HLMP1521101](#) [HLMP1523802F](#) [HLMP1700101F](#) [HLMP1700104F](#) [BHA-1564-G](#)
[SMF-HM1530YD-305](#) [SSF-LXH409SYSUGW](#) [AM2520EHSGD](#) [HLMP1301104F](#) [HLMP1385101F](#) [HLMP1421101](#) [HLMP1503103F](#)
[HLMP1503104F](#) [HLMP1700102F](#) [HLMP1700106F](#) [HLMP1700107F](#) [HLMP1790101F](#) [HLMP1790103F](#) [LTL-4211NHBP](#) [5390H3](#) [551-](#)
[2802F](#) [552-0794-810F](#) [553-0222-812F](#) [HT3-BC-T](#) [564-0700-831F](#) [WP59BLGEW](#) [103-3101-1231-403](#) [5502407811F](#) [550-3007-810F](#) [551-](#)
[3307MF](#) [552080-1](#) [573-2399-100F](#) [592-2020-302F](#) [5932-927-2701-3F](#) [SMF-HM1530SRD-509](#) [SSF-LXH100MID](#) [SSF-LXH2103SRSDRP](#)
[SSF-LXH555USBW](#) [WP937SB/4YGW](#) [WP937EB2EGW](#) [551-0312-802F](#) [553-0110-802F](#) [561-5501-050F](#) [6202T3-5VLC](#) [LTL-307G08A-D](#)
[CMD57164](#) [568-2231-313F](#)