


2mm
LED CBI® Circuit Board Indicator
(DIN 41494 Compatible), Tri-Level

Dialight
570-0100-xxx

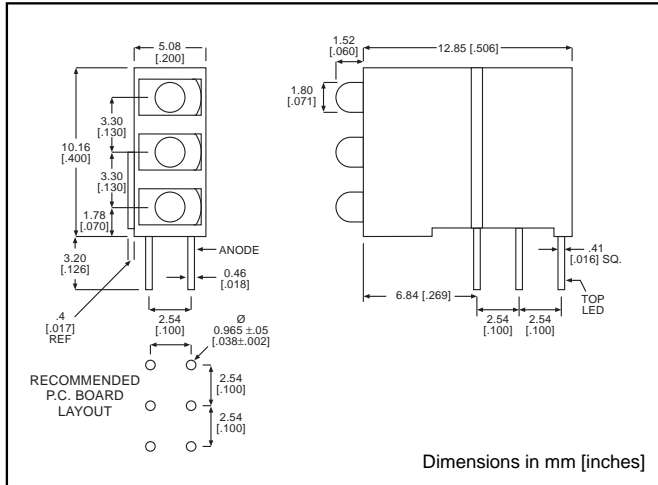

PART NO.

COLOR*

- 570-0100-111 Red-Red-Red
 - 570-0100-132 Red-Yellow-Green
 - 570-0100-222 Green-Green-Green
 - 570-0100-333 Yellow-Yellow-Yellow
- * Top-Middle-Bottom LED


3

Features

- Designed to accommodate DIN 41494
- Multiple CBIs form horizontal LED arrays on 5.08mm (0.200") center-lines
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 29%
- Polymer content: PBT, 0.595 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN- 60825-1

Custom Combinations

- Contact factory for information on custom color combinations.

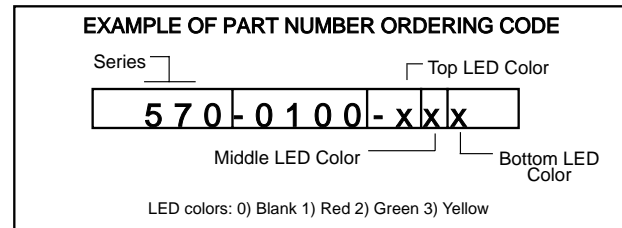

Tolerance note: As noted, otherwise:

- LED Protrusion: ±0.04 mm [±0.016]
- CBI Housing: ±0.02mm[±0.008]

Typical Operating Characteristics ($T_A = 25^\circ\text{C}$) *See LED data sheet for additional information*
GENERAL PURPOSE *See Page 3-17 and 3-18 for Reference Only LED Drive Circuit Examples*
See Page 3-19 for Pin Out


Part Number	Color	Peak Wavelength nm	I_V^* mcd	V_F^{**} Volts	Viewing Angle $2\theta_{1/2}$	LED Data sheet	Page #
570-0100-xxx	Red	635	12.6	2	38°	521-9630	3-13
	Green	565	8.7	2.1	38°	521-9632	3-13
	Yellow	585	12.6	2.1	38°	521-9631	3-13

* $I_F = 10 \text{ mA}$ ** $I_F = 20 \text{ mA}$

2mm Discrete LED Diffused

Dialight

521-9630, -9631, -9632

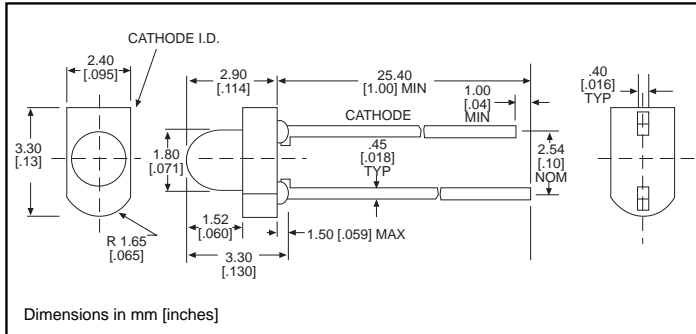

PART NO.	COLOR
521-9630	Red
521-9631	Yellow
521-9632	Green

3

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

	Red -9630	Yellow -9631	Green -9632
Power Dissipation (mW)	100	60	100
Forward Current (mA)	30	20	30
Derating (mA/°C) From 25°C	.4	.25	.4
Peak Current (mA) Pulse width = 10μs	120	80	120
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

OPERATING CHARACTERISTICS (T_A=25°C)

		Red -9630	Yellow -9631	Green -9632
Luminous Intensity (mcd)	Min.	3.7	3.7	2.5
	Typical	12.6	12.6	8.7
Peak Wavelength (nm)	Typical	635	585	565
Viewing Angle (2θ _{1/2})	Typical	38°	38°	38°
Forward Voltage (V)	Typical	2	2.1	2.1
	Max.	2.8	2.8	2.8
Reverse Voltage (V), I _R =100μA	Min.	5	5	5

θ_{1/2} is the off axis angle at which the luminous intensity is half the axial luminous intensity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Circuit Board Indicators](#) category:

Click to view products by [Dialight](#) manufacturer:

Other Similar products are found below :

[568-0701-841F](#) [LTL-4221NH129](#) [LTL-42DGNMHDP1](#) [HLMP1521101](#) [HLMP1523802F](#) [HLMP1700101F](#) [HLMP1700104F](#) [BHA-1564-G](#)
[SMF-HM1530YD-305](#) [SSF-LXH409SYSUGW](#) [AM2520EHSGD](#) [HLMP1301104F](#) [HLMP1385101F](#) [HLMP1421101](#) [HLMP1503103F](#)
[HLMP1503104F](#) [HLMP1700102F](#) [HLMP1700106F](#) [HLMP1700107F](#) [HLMP1790101F](#) [HLMP1790103F](#) [LTL-4211NHBP](#) [5390H3](#) [551-](#)
[2802F](#) [552-0794-810F](#) [553-0222-812F](#) [HT3-BC-T](#) [564-0700-831F](#) [WP59BLGEW](#) [103-3101-1231-403](#) [5502407811F](#) [550-3007-810F](#) [551-](#)
[3307MF](#) [552080-1](#) [573-2399-100F](#) [592-2020-302F](#) [5932-927-2701-3F](#) [SMF-HM1530SRD-509](#) [SSF-LXH100MID](#) [SSF-LXH2103SRSDRP](#)
[SSF-LXH555USBW](#) [WP937SB/4YGW](#) [WP937EB2EGW](#) [551-0312-802F](#) [553-0110-802F](#) [561-5501-050F](#) [6202T3-5VLC](#) [LTL-307G08A-D](#)
[CMD57164](#) [568-2231-313F](#)