


2mm

# LED CBI® Circuit Board Indicator (DIN 41494 Compatible), Bi-Level



571-01xx

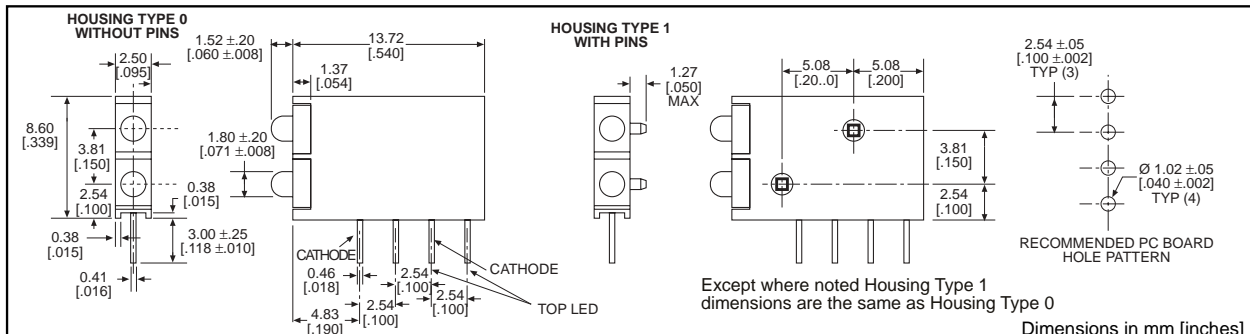


### Features

- Designed to accommodate DIN 41494
- Multiple CBIs form horizontal LED arrays on 2.54mm (0.100") center-lines
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 32%
- Polymer content: PBT, 0.290 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN-60825-1

### Tolerance note: As noted, otherwise:

- LED Protrusion: ±0.04 mm [±0.016]
- CBI Housing: ±0.02mm[±0.008]

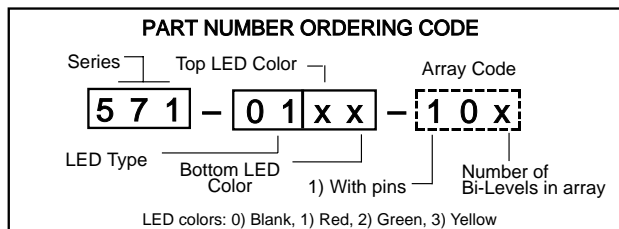

-10x Suffix required only when ordering single units with pins or arrays

### PART NO. WITHOUT PINS

PART NO. WITHOUT PINS	COLOR*
571-0111	Red-Red
571-0112	Red-Green
571-0122	Green-Green
571-0132	Yellow-Green
571-0133	Yellow-Yellow

\* Top-Bottom LED

### PART NO. WITH PINS


PART NO. WITH PINS	COLOR*
571-0111-100	Red-Red
571-0112-100	Red-Green
571-0122-100	Green-Green
571-0132-100	Yellow-Green
571-0133-100	Yellow-Yellow

\* Top-Bottom LED

Arrays available. See Part Number ordering code.

### Custom Combinations

- Contact factory for information on custom color combinations.

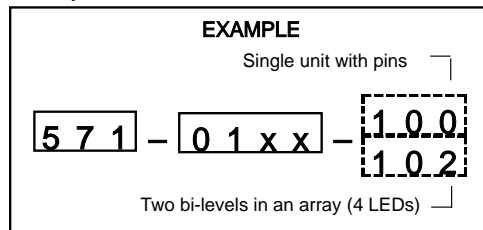

### Typical Operating Characteristics (T<sub>A</sub> = 25°C)

See LED data sheet for additional information

### GENERAL PURPOSE

See Page 3-17 and 3-18 for Reference Only LED Drive Circuit Examples

See Page 3-20 for Pin Out


Part Number	Color	Peak Wavelength nm	I <sub>v</sub> * mcd	V <sub>F</sub> ** Volts	Viewing Angle 2Θ <sub>1/2</sub>	LED Data sheet	Page #
571-01xx	Red	635	12.6	2	38°	521-9630	3-13
	Green	565	8.7	2.1	38°	521-9632	3-13
	Yellow	585	12.6	2.1	38°	521-9631	3-13

\* I<sub>F</sub> = 10mA \*\* I<sub>F</sub> = 20mA

# 2mm Discrete LED Diffused

# Dialight

## 521-9630, -9631, -9632

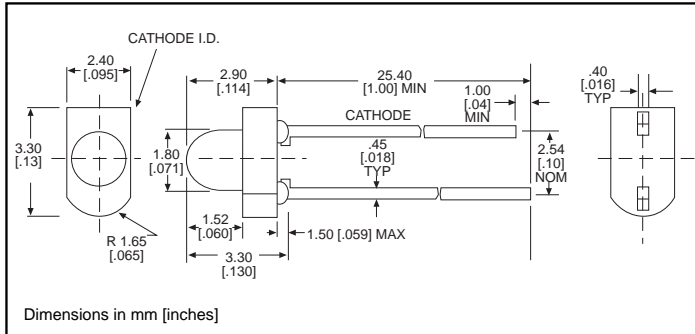

### PART NO.

521-9630

521-9631

521-9632

### COLOR

Red

Yellow

Green

3

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

	Red -9630	Yellow -9631	Green -9632
Power Dissipation (mW)	100	60	100
Forward Current (mA)	30	20	30
Derating (mA/°C) From 25°C	.4	.25	.4
Peak Current (mA) Pulse width = 10μs	120	80	120
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

### OPERATING CHARACTERISTICS (T<sub>A</sub>=25°C)

		Red -9630	Yellow -9631	Green -9632
Luminous Intensity (mcd)	Min.	3.7	3.7	2.5
	Typical	12.6	12.6	8.7
Peak Wavelength (nm) λ <sub>Peak</sub>	Typical	635	585	565
Viewing Angle (2Θ <sub>1/2</sub> )	Typical	38°	38°	38°
Forward Voltage (V) I <sub>F</sub> =20mA	Typical	2	2.1	2.1
	Max.	2.8	2.8	2.8
Reverse Voltage (V), I <sub>R</sub> =100μA	Min.	5	5	5

Θ<sub>1/2</sub> is the off axis angle at which the luminous intensity is half the axial luminous intensity

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Circuit Board Indicators](#) category:*

*Click to view products by [Dialight](#) manufacturer:*

Other Similar products are found below :

[568-0701-841F](#) [LTL-4221NH129](#) [LTL-42DGNMHDP1](#) [HLMP1521101](#) [HLMP1523802F](#) [HLMP1700101F](#) [HLMP1700104F](#) [BHA-1564-G](#)  
[SMF-HM1530YD-305](#) [SSF-LXH409SYSUGW](#) [AM2520EHSGD](#) [HLMP1301104F](#) [HLMP1385101F](#) [HLMP1421101](#) [HLMP1503103F](#)  
[HLMP1503104F](#) [HLMP1700102F](#) [HLMP1700106F](#) [HLMP1700107F](#) [HLMP1790101F](#) [HLMP1790103F](#) [LTL-4211NHBP](#) [5390H3](#) [551-](#)  
[2802F](#) [552-0794-810F](#) [553-0222-812F](#) [HT3-BC-T](#) [564-0700-831F](#) [WP59BLGEW](#) [103-3101-1231-403](#) [5502407811F](#) [550-3007-810F](#) [551-](#)  
[3307MF](#) [552080-1](#) [573-2399-100F](#) [592-2020-302F](#) [5932-927-2701-3F](#) [SMF-HM1530SRD-509](#) [SSF-LXH100MID](#) [SSF-LXH2103SRSDRP](#)  
[SSF-LXH555USBW](#) [WP937SB/4YGW](#) [WP937EB2EGW](#) [551-0312-802F](#) [553-0110-802F](#) [561-5501-050F](#) [6202T3-5VLC](#) [LTL-307G08A-D](#)  
[CMD57164](#) [568-2231-313F](#)