


3mm
Prism® CBI® Circuit Board Indicator
Surface Mount LED, Round Lens



591-3x0x-0xx

1

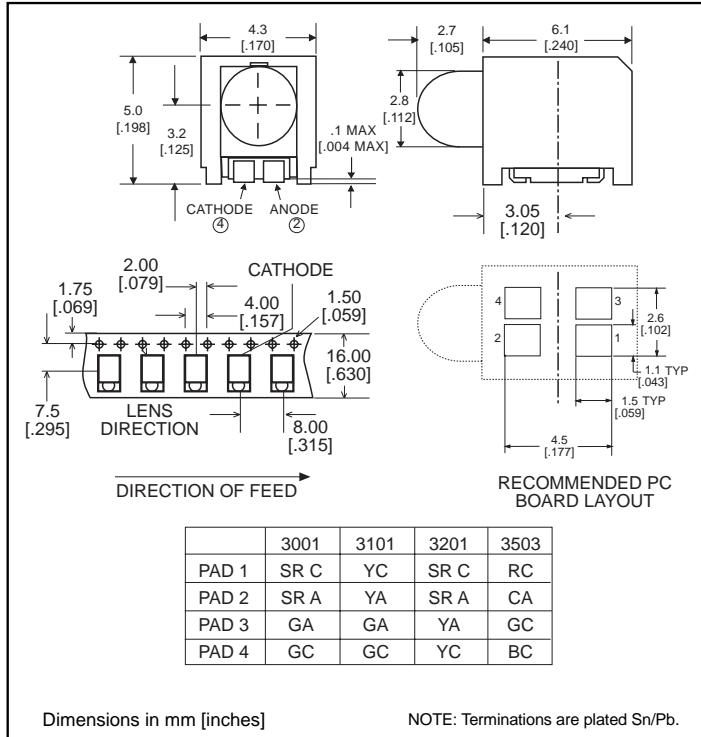

Part Number* Type

- 591-3001-0xx Super Red/Green Bi-Color
- 591-3101-0xx Yellow/Green Bi-Color
- 591-3201-0xx Super Red/Yellow Bi-Color
- 591-3503-0xx Red/Blue/Green Tri-Color **NEW**

Features

- Helps to eliminate mixed technology PC board processing.
- Unique patented low part count design.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase solder processes.
- Packaged on 16mm tape, 7" or 13" reels per EIA-481-2.
- Black housing enhances contrast ratio.
- Housing material meets UL94V-0 flammability rating.
- Lens material meets UL94-HB flammability rating.
- Uses LEDs designed specifically for surface mounting.

U.S. Patent RE 34,254; foreign patents pending.

*ORDERING INFORMATION	
591-3x01-0xx	
packaging option	
02	20 pieces on tape
07	7" reel, 400 pcs/reel
13	13" reel, 1600 pcs/reel

NEW

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Parameter	-3001	-3101	-3201	-3503
Color*	30	31	32	35
Power Dissipation	100mW	100mW	100mW	150mW Total
Forward DC Current	30mA	30mA	30mA	20mA single chip on 30mA all chips on
Peak Forward Current (10 μ sec)	500mA	500mA	500mA	
Operating Temperature	-55°C to +100°C			
Storage Temperature	-55°C to +100°C			
Soldering Temperatures Convection IR Vapor Phase	235° Peak, above 185° for 90 sec., 215°C for 3 Min.			

Solder Adherence per MIL-STD-202E, Method 208C

* LED colors: 30) Super Red/Green Bi-Color 31) Yellow/Green Bi-Color 32) Super Red/Yellow Bi-Color 35) Red/Blue/Green Tri-Color

Operating Characteristics ($T_A = 25^\circ\text{C}$)

Parameter	Part No.	Color	Min	Typ	Max	Units	Test Cond.
Forward Voltage V_F	-3001	30		2/2	2.6/2.6	V	$I_F=10\text{ mA}$
	-3101	31		2/2	2.6/2.6		
	-3201	32		2/2	2.6/2.6		
	-3503	35		2/3.8/2	2.6/4.5/2.6		
Reverse Voltage V_R	-3001	30	5/5			V	$I_R = 10\ \mu\text{A}$
	-3101	31	5/5				
	-3201	32	5/5				
	-3503	35	5/1/5				
Dominant Wavelength λ_{Dom}	-3001	30		628/570		nm	
	-3101	31		586/570			
	-3201	32		628/586			
	-3503	35		645/466/570			
Luminous Intensity I_V	-3001	30		6.5/8		mcd	$I_F = 20\text{ mA}$
	-3101	31		6.5/8			
	-3201	32		6.5/6.5			
	-3503	35		10/5/16			
Viewing Angle ($2\Theta_{1/2}$)	-3001	30		40/40		deg.	
	-3101	31		40/40			
	-3201	32		40/40			
	-3503	35		40/40/40			

$\Theta_{1/2}$ is the off axis angle at which the luminous intensity is half the axial luminous intensity

* LED colors: 30) Super Red/Green Bi-Color 31) Yellow/Green Bi-Color 32) Super Red/Yellow Bi-Color 35) Red/Blue/Green Tri-Color



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Dialight](#) manufacturer:

Other Similar products are found below :

[004-1830-29-201](#) [004-1830-29-207](#) [004-1930-29-203](#) [004-1930-29-207](#) [0042900300](#) [008-0000-948](#) [008-0111-200](#) [008-0112-203](#) [008-0132-200](#) [008-0133-200](#) [019-0410-05-301](#) [019-0511-303](#) [019-0531-303](#) [019-0532-303](#) [019-0533-300](#) [019-0533-303](#) [019-0534-300](#) [019-0535-200](#) [0190535300](#) [019-0535-303](#) [019-0901-05-301](#) [019310105301](#) [019-3202-05-301](#) [019-3202-05-303](#) [019-3206-05-303](#) [019-3402-05-203](#) [021-0410-2900-301](#) [021041029301](#) [021-1310-2900-301](#) [021-1310-29-201](#) [021-1310-29-301](#) [021-2900-200](#) [021-2900-300](#) [026-0410-11-301](#) [026-1111-200](#) [026-1111-203](#) [026-1111-300](#) [026-1112-203](#) [026-1112-300](#) [026-1113-203](#) [026-1131-203](#) [026-1131-300](#) [0261131303](#) [026-1132-203](#) [026-1132-300](#) [026-1132-303](#) [026-1133-203](#) [026-1133-300](#) [026-1134-300](#) [026-1135-203](#)