linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

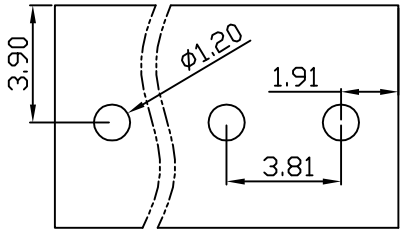

PCB Layout

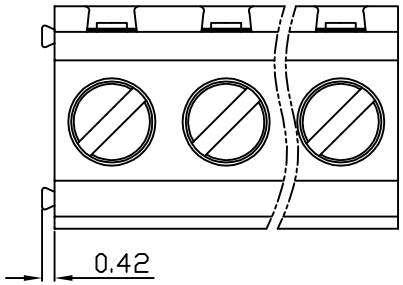

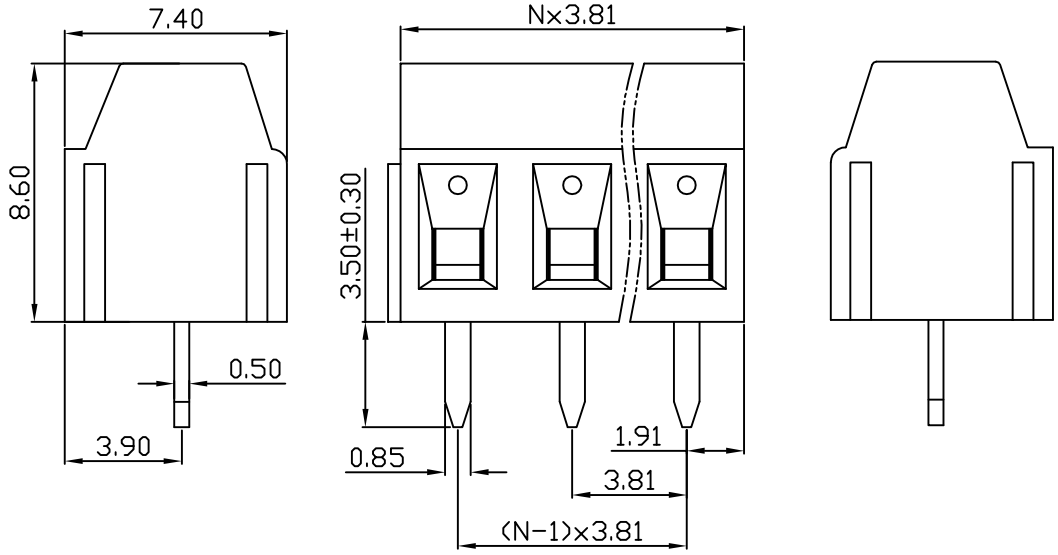

UL/CUL 技术 参数 UL/CUL Technical Data			
等 级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	28-16		
耐电压 Withstanding Voltage	1600V/1Min		
IEC 技术参数 IEC Technical Data			
过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	160	200	400
额定电流 Rated Current [A]	13.5	13.5	13.5
额定冲击电压 Impulse withstand voltagea [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	1.0		
材 料 Material			
绝缘材料 Insulation Material	PA66		
阻燃等级 Imflammability	UL94V-0		
导体材料 Contactor Material	铜合金 Copper alloy		
导体表面镀层 Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data			
间距 Pitch [mm]	3.81		
极数 Poles [P]	02~24		
剥线长度 Stripping Length [mm]	4-5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		
工作温度 Operating temperatur [°C]	-40~+105		
引针尺寸 Pin Dimensions [mm]	0.50x0.85		
PCB板孔径 PCB Hole Diameter [mm]	1.20		

DB125 — 3.81 — XXP — C — S/P

(Series No.) (Pitch) (Poles) Slotted/Phillips

(Color) : 1.(Green) 2.(Black) 3.(Blue) 4.(Clear) 5.(Gray)
6.(Orange) 7.(Red) 8.(White) 9.(Yellow)

DORABO 宁波地博电气有限公司 Ningbo Dorabo Electric CO., Ltd

APPD: JTing Chen 2022.7.14	NAME: DB125-3.81-XXP-C-S				
CHKD: Duck Mao 2022.7.14		SIZE: A4	mm (inch)	REV	T0-1
DRFT: Steven Lu 2022.7.14	TYPE: CUSTOMER_DRAWING		SCALE: 1:1	SHEET	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Terminal Blocks ***category:***

Click to view products by DIBO ***manufacturer:***

Other Similar products are found below :

MBE-1512 MBE-1520 MBE-154 MBE-156 MBES-156 MH-2512 MHE-132 MHE-163 MI-254 (35) MI-272 MPT-275 ELM10110G BA311TU BA411SU MV-254-D MV-255 MV-493 MVE-252 MVE-253 MVEB-153 1700096 1705142 1712417 1713088 1760594 1-796689-8 1800114 20020314-C121B01LF 20020316-G041B01LF KP03215000J0G KP04215000J0G S451 29.007 29.116 30.103 30.503 30.608 30.756 30.853 9872-0-00-15-00-00-33-0 996750 1706303 1710052 1733868 1777707 1786769 1-796692-3 1800883 1868982 1868995