

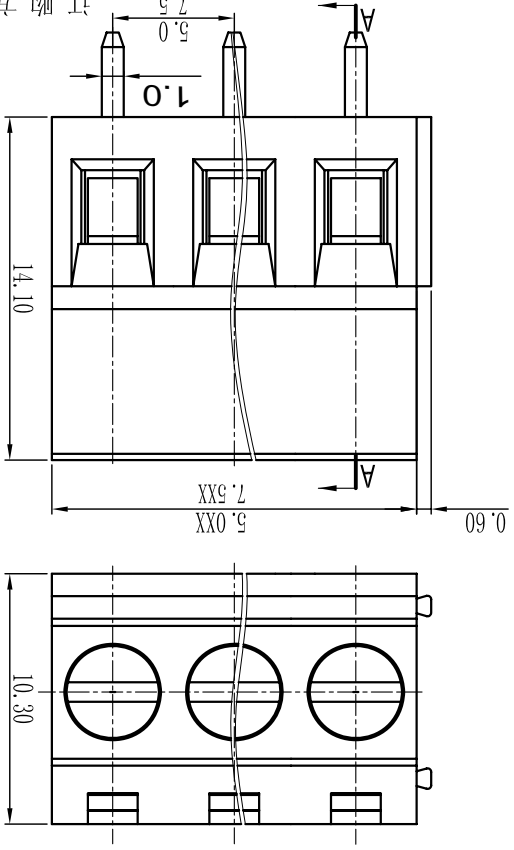


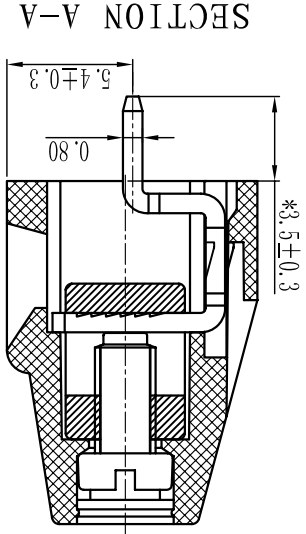


Cixi Dibo Electronics Co., LTD

产品规格书
THE SPEC SHEET

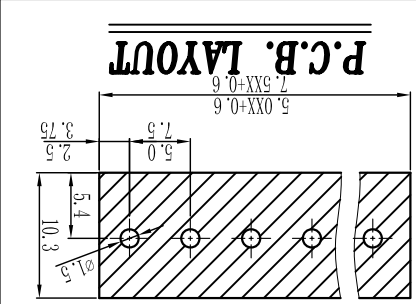

订购方式：
HOW TO ORDER:

- 电气性能/Electrical
- 参考标准/Standard: UL IEC
- 额定电压/Rated voltage: 300V 250V
- 额定电流/Rated current: 10A 18A
- 接触电阻/Contact resistance: 20mΩ
- 使用线径/Wire range: 22-12AWG 2.5mm²
- 耐压/Withstanding voltage: AC2000V/1Min
- 绝缘电阻/Insulation resistance: 500MΩ/DC500V
- 机械性能/Mechanical
- 温度范围/Temp.Range: -40°C~+105°C
- 扭矩/Torque: 0.4Nm(3.54lb·in)
- 剥线长度/Strip length: 6-7mm
- 尺寸/Dimensions
- 间距/Pitch: 5.0mm, 7.5mm
- 极数/Poles: 2P-24P
- 材质及电镀/Material
- 塑件/Housing: PA66, UL94V-0
- 螺丝/Screws: M2.5, steel Zinc plated
- 方块/Cage: Brass, Ni plated
- 焊脚/Pin header: Brass, Snle plated

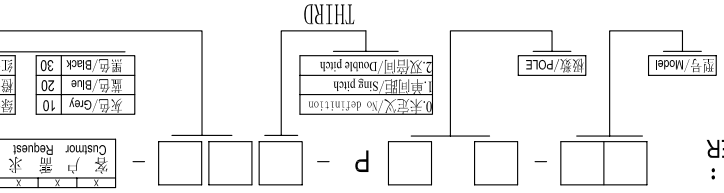

linear dimension(Tolerances Standard GB/T 14486-2008)	tolerance	variable range	tolerance
≡	±0.1	6 to	±0.1
≡	±0.14	10 to	±0.14
≡	±0.19	18 to	±0.19
≡	±0.25	30 to	±0.25
≡	±0.32	50 to	±0.32
≡	±0.43	80 to	±0.43
≡	±0.57	120 to	±0.57
≡	±0.72	160 to	±0.72
≡	±0.88	200 to	±0.88
≡	±1.05	250 to	±1.05
≡	±1.25	all to	±1.25
≡	0.5	5 to	0.025
≡	0.025	5 to	0.06
≡	0.06	5 to	0.12
≡	0.12	5 to	0.4

单位名称/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例	Cixi Dibo Electronics Co.,LTD		名称/NAME	DB128V-5.0/7.5
第一视角/THIRD ANGLE PROJECTION									

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [DIBO](#) manufacturer:

Other Similar products are found below :

[00175550202](#) [MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-1510](#) [MBES-153](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-133](#) [MHE-163](#)
[MI-254 \(35\)](#) [MI-272](#) [8739](#) [880507](#) [880508](#) [MPT-275](#) [1546551-6](#) [ELM023100](#) [ELM10110G](#) [ELVD12100](#) [BA311TU](#) [BA411SU](#) [MV-152](#)
[MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-462](#) [MV-472](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-258](#) [MVE-273](#) [MVEB-153](#) [1700096](#)
[1702246](#) [1705142](#) [1712417](#) [1713020](#) [1713088](#) [1776118-2](#) [1790852](#) [1-796689-8](#) [1-796692-6](#) [1800001](#) [1800114](#) [1823215](#) [1838462](#)