
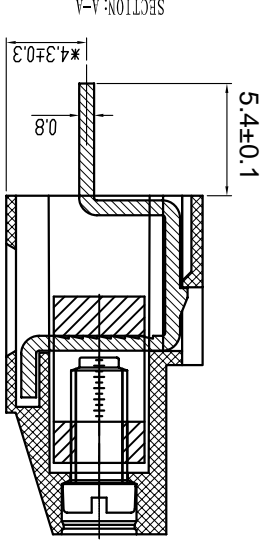
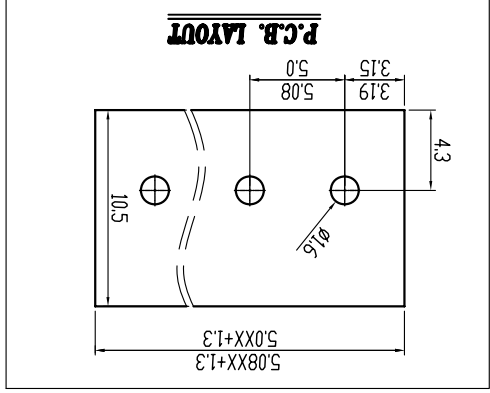


电气性能/Electrical	参考标准/Standard	UL	300V	250V	IEC
	额定电压/Rated voltage	16A	300V	250V	
	额定电流/Rated current	16A	24A		
接触电阻/Contact resistance	20mΩ				
绝缘电阻/Insulation resistance	500MΩ/DC500V				
使用线径/Wire range	26~12AWG 2.5mm²				
耐电压/Wrth standing voltage	AC 2000V/1 Min				
机械性能/Mechanical					
扭矩/Torque	0.5Nm(4.5lb.in)				
剥线长度/Steip Length	6-7mm				
温度范围/Temp.Range	-40°C~+105°C				
瞬时温度/MAX Soldering	+250°C, for 5 Sec				
尺寸/Dimensions	间距/Pitch	5.0mm,5.08mm			
板数/Poles	2~24p				
材质及电镀/Material					
塑件/Housing	PA66, UL94V-0				
螺丝/Screws	M3.0, Steel Zn plated				
焊脚/Pin header	Brass, Tin plated				
方块/Cage	Brass Ni plated				

单位/UNITS mm 尺寸/ SIZE A4 比例/SCALE 5:2
 第三视角/THIRD ANGLE PROJECTION
 名称/ TITLE DB129V-5.0/5.08-XXP
Cixi Dibo Electronics Co., LTD

tolerance	variable range	linear dimension (Tolerances Standard GB/T 14486-2008)
±0.1	6 to	≡
±0.14	10 to	≡
±0.19	10 to	≡
±0.25	18 to	≡
±0.32	30 to	≡
±0.43	50 to	≡
±0.57	80 to	≡
±0.72	120 to	≡
±0.88	160 to	≡
±1.05	200 to	≡
±1.25	250 to	≡
0.5	all	≡
0.025	5 to	≡
0.06	5 to	≡
0.12	30 to	≡
0.4	120 to	≡

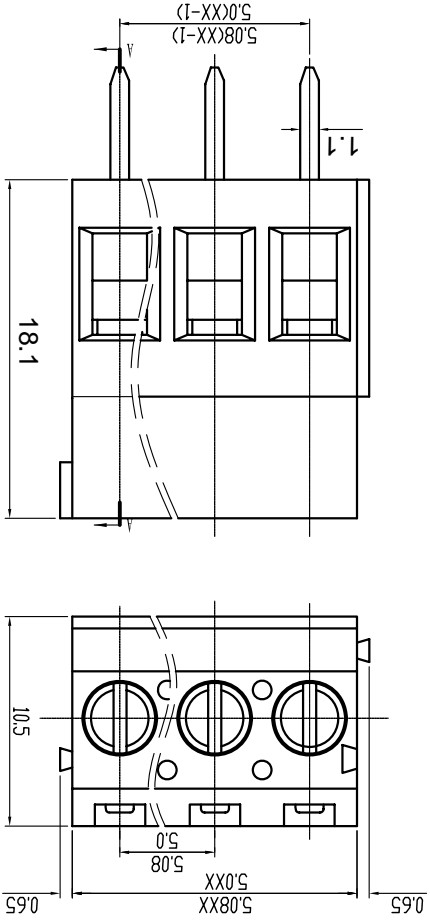

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [DIBO](#) manufacturer:

Other Similar products are found below :

[00175550202](#) [MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-1510](#) [MBES-153](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-133](#) [MHE-163](#)
[MI-254 \(35\)](#) [MI-272](#) [8739](#) [880507](#) [880508](#) [MPT-275](#) [1546551-6](#) [ELM023100](#) [ELM10110G](#) [ELVD12100](#) [BA311TU](#) [BA411SU](#) [MV-152](#)
[MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-462](#) [MV-472](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-258](#) [MVE-273](#) [MVEB-153](#) [1700096](#)
[1702246](#) [1705142](#) [1712417](#) [1713020](#) [1713088](#) [1776118-2](#) [1790852](#) [1-796689-8](#) [1-796692-6](#) [1800001](#) [1800114](#) [1823215](#) [1838462](#)