


TOOLERANCES EXCEPT AS NOTED

linear dimension	fillet	chamfer	short angle sid	≡	—	□	//	⊥
tolerance	±0.1	±0.2	±0.5	±1	1°	30'	20'	10'
variable	6 to	6 to	6 to	6 to	all to	5 to	120 to	120 to
range	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1
variable	6 to	6 to	6 to	6 to	6 to	all to	480 to	120 to
range	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1
variable	6 to	6 to	6 to	6 to	6 to	all to	480 to	120 to
range	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1
variable	6 to	6 to	6 to	6 to	6 to	all to	480 to	120 to
range	to	to	to	to	to	to	to	to

订购方式：
HOW TO ORDER:

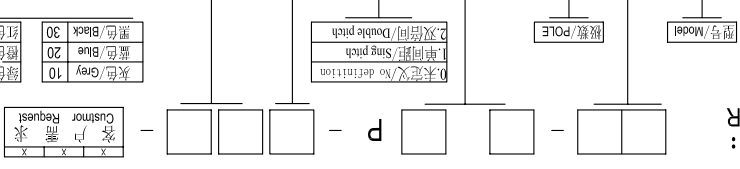

型号/Model	极数/POLE	间距/Pitch	颜色/Color
0. 未定义/No definition	1. 单间距/Single pitch	0. 未定义/No definition	10 灰色/Grey
1. 单间距/Single pitch	2. 双间距/Double pitch	10 灰色/Grey	20 蓝色/Blue
2. 双间距/Double pitch		20 蓝色/Blue	30 黑色/Black
		30 黑色/Black	40 绿色/Green
		40 绿色/Green	50 橙色/Orange
		50 橙色/Orange	60 红色/Red
		60 红色/Red	70 透明/Transparent
		70 透明/Transparent	80 黄色/Yellow
		80 黄色/Yellow	90 白色/White

- 电气性能/Electrical
- 参考标准/Standard: UL IEC
- 额定电压/Rated voltage: 300V 320V
- 额定电流/Rated current: 15A 20A
- 接触电阻/Contact resistance: 20mΩ
- 使用线径/Wire range: 28-14AWG 2.5mm²
- 耐电压/Withstanding voltage: AC2000V/1Min
- 绝缘电阻/Insulation resistance: 500MΩ/DC500V
- 机械性能/Mechanical
- 温度范围/Temp.Range: -40°C~+105°C
- 扭矩/Torque: 0.5Nm (4.51b in)
- 剥线长度/Strip length: 7-8mm
- 尺寸/Dimensions
- 间距/Pitch: 5.0mm, 5.08mm, 7.62mm
- 极数/Poles: 02P-24P
- 材质及电镀/Material
- 塑料/Housing: PA66, UL94V-0
- 螺丝/Screws: M3, steel Zinc plated
- 夹子/Clamp: Brass, Ni plated
- 方块/wire guard: Phosphor bronze, Ni plated

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [DIBO](#) manufacturer:

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)