



Cixi Dibo Electronics Co., LTD

产品规格书
product specification

电气性能/Electrical
参考标准/Standard: UL IEC

额定电压/Rated voltage: 300V 320V

额定电流/Rated current: 15A 20A

接触电阻/Contact resistance: 20mΩ

耐电压/Withstanding voltage: AC2000V/1min

绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical

温度范围/Temp.Range: -40°C~+105°C

瞬间温度/MAX Soldering: +250°C, for 5 Sec

尺寸/Dimensions



间距/Pitch: 5.00mm, 5.08mm

极数/Poles: 2P-24P


材质及电镀/Material

塑件/Housing: PA66, UL94V-0


焊针/Pin header: Brass, Tin plated

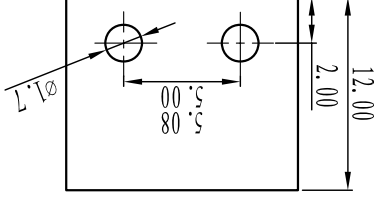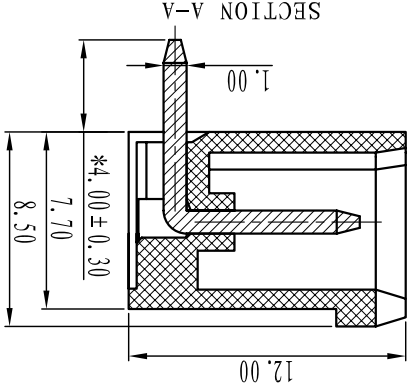

订购方式:
HOW TO ORDER:



| | | |
|---------------------|------------------|--------------------|
| 0.未定义/No definition | 1.单间距/Sing pitch | 2.双间距/Double pitch |
| 灰色/Gray 10 | 蓝色/Blue 20 | 黑色/Black 30 |
| 绿色/Green 40 | 橙色/Orange 50 | 红色/Red 60 |
| 透明/Transparent 70 | 黄色/Yellow 80 | 白色/White 90 |

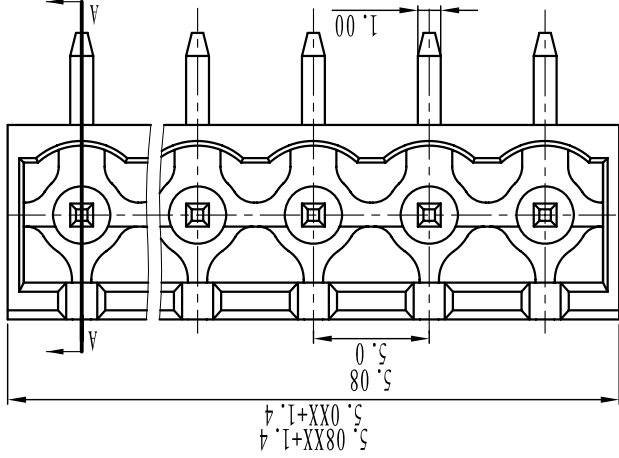

TOLERANCES EXCEPT AS NOTED

| | | | | | | | | |
|------------------|---------|---------|-----------------|------|------|------|------|----|
| linear dimension | filllet | chamfer | short angle sid | ≡ | — | □ | // | ⊥ |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | to | to |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 |
| variable | to | to | to | to | to | to | to | to |
| range | 6 | 30 | 120 | 480 | to | to | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [DIBO](#) manufacturer:

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)