

**电气性能/Electrical**

参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 320V  
 额定电流/Rated current: 15A 20A  
 接触电阻/Contact resistance: 20mΩ

耐电压/Withstanding voltage: AC2000V/1Min  
 绝缘电阻/Insulation resistance: 500MΩ/DC500V  
**机械性能/Mechanical**

温度范围/Temp Range: -40° C~+105° C  
 瞬间温度/MAX Soldering: +250° C, for 5 Sec

**尺寸/Dimensions**

间距/Pitch: 7.5mm, 7.62mm  
 极数/Poles: 2P-24P


**材质及电镀/Material**

塑件/Housing: PA66, UL94V-0  
 焊针/Pin header: Brass, Tin plated  
 螺母/Nut: M2.5 Brass

**TOLERANCES EXCEPT AS NOTED**

	linear dimension	fillet	chamfer	短角短边	短角短边	短角短边	短角短边	短角短边	短角短边	短角短边			
tolerance	±0.1	±0.2	±0.2	±0.5	±1	1°	30°	10°	0.5	0.025	0.06	0.12	0.4
variable range	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30	6 to 30

**订购方式 : HOW TO ORDER**

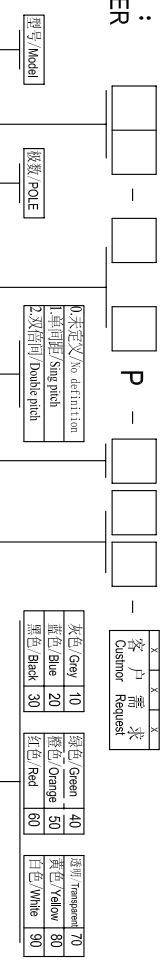

第一视角 / FIRST ANGLE PROJECTION



单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	
Cixi Dibo Electronics Co., LTD					
名称 / NAME	DB2ERM-7.5/7.62-XXP				

客户需求 Customer Request	
灰色/Gray	10
蓝色/Blue	20
黑色/Black	30
绿色/Green	40
橙色/Orange	50
红色/Red	60
透明/Transparent	70
黄色/Yellow	80
白色/White	90

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [DIBO](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)