


电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 750V
 额定电流/Rated current: 20A 24A
 使用线径/Wire range: 22-12AWG 2.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500M Ω /DC500V
 机械性能/Mechanical
 温度范围/Temp.Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
 最大锁紧力矩/Max.Torque: 1.2Nm (10.61 b. in)

尺寸/Dimensions
 间距/Pitch: 10.0mm
 极数/Poles: 2P-24P
 材质及电镀/Material
 塑料/Housing: PA66, UL94V-0
 螺丝/Screws: M4, steel Ni plated
 焊脚/Pin header: Brass, 0.8, Tin plated

订购方式: HOW TO ORDER

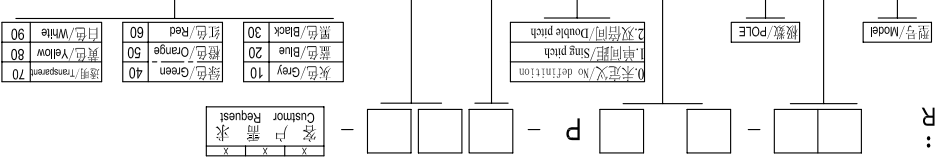

linear dimension/Tolerances Standard GB/T 14486-2008	≡	—	□	//	L											
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4
variable range	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	oil	5 to	5 to	30 to	120 to	120 to
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over

单位名称/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例	名称/NAME	DBT30C-10.0-XXP
公司	Cixi Dibo Electronics Co., LTD						
第一视角/FIRST ANGLE PROJECTION							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Barrier Terminal Blocks](#) category:

Click to view products by [DIBO](#) manufacturer:

Other Similar products are found below :

[CTA-0103](#) [6PCR-02-008](#) [6PCR-05-008](#) [6PCR-08-008](#) [6PCR-21-006](#) [6PCV-06-008](#) [6PCV-10-009](#) [6PCV-15-008](#) [6STR-06-006](#) [6STR-08-006](#) [6STR-12-008](#) [6STR-14-008](#) [6STR-16-008](#) [6STR-17-008](#) [6STR-21-008](#) [6STR-25-008](#) [6STR-27-008](#) [6STV-03-006](#) [6STV-03-008](#) [6STV-04-006](#) [6STV-10-006](#) [6WWR-03](#) [6WWV-11-008](#) [6WWV-12-008](#) [6WWV-16-008](#) [7-1546701-0](#) [72212603](#) [72503-C](#) [73203](#) [76007](#) [7606-602LF](#) [77010-50](#) [796985-3](#) [796988-4](#) [7C1N08](#) [8-1437402-5](#) [8-1437402-7](#) [8-1546158-0](#) [870505](#) [870903](#) [8PCR-06-006](#) [8PCV-02-008](#) [8PCV-04-008](#) [8PCV-05-008](#) [8PCV-09-006](#) [8PCV-15-006](#) [8PCV-16-006](#) [8PCV-17-006](#) [8QCR-03-008](#) [8STV-04-006](#)