




MICROPROCESSOR
CORE MODULE

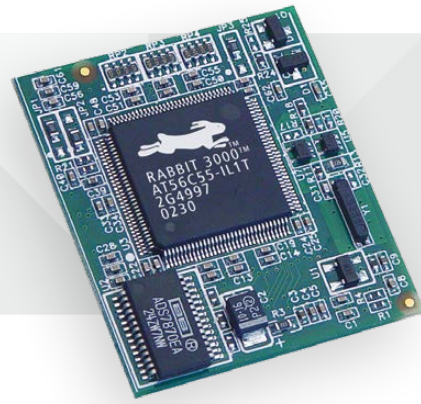

DIGI RABBITCORE RCM3400 SERIES

The compact, analog-enabled RabbitCore is designed for embedded applications that require analog functionality

The RabbitCore RCM3400 series, featuring the Rabbit® 3000 microprocessor, is designed for embedded control and monitoring applications requiring analog functionality. Its small size and ease of use when paired with Dynamic C® allow engineers to develop a control and monitoring solution for many of today's embedded applications.


The Ethernet-ready RCM3400 series comes pre-assigned with a MAC ID, along with a development board 10Base-T reference design. Built-in low EMI features, including a clock spectrum spreader, practically eliminate EMI problems, helping to pass CE and RF emissions tests.

Rabbit hardware and Dynamic C are designed in a complementary fashion for maximum performance and ease of use in embedded systems. The additional software components in Dynamic C allow you to add functionality for embedded application customization.


BENEFITS

- Rabbit 3000 microprocessor at 30 MHz
- Up to 512K Flash/512K SRAM
- 8 channel 12-bit A/D with programmable gain
- 47 digital I/O and 5 serial ports (IrDA, HDLC, asynch, SPI)
- MAC ID installed
- Compact size simplifies integration
- Ready-made platform for fast time-to-market, up to 3 months of design integration time savings
- Low-cost embedded microprocessor module

APPLICATION EXAMPLE

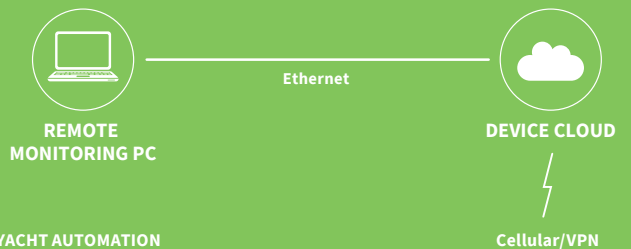

YACHT AUTOMATION

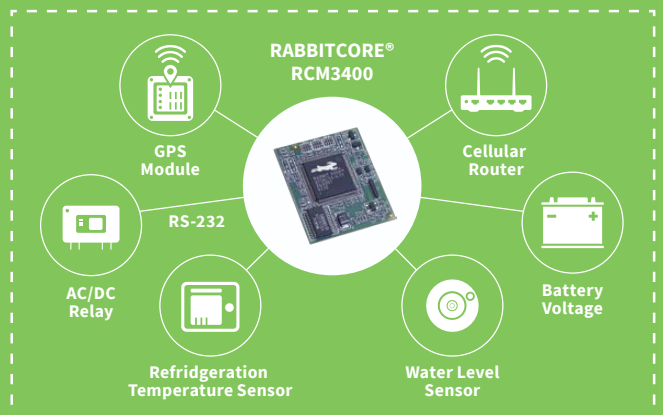

RELATED PRODUCTS



RabbitCore®
RCM3000
Series



RabbitCore®
RCM3100
Series



RabbitCore®
RCM4300
Series



RabbitCore®
RCM3600
Series



Dynamic C®




SPECIFICATIONS

RCM3400

| RCM3410

FEATURE

MICROPROCESSOR	Rabbit® 3000 at 30 MHz	
FLASH MEMORY	512K	256K
SRAM	512K	256K
BACKUP BATTERY	Connection for user-supplied backup battery (to support RTC and SRAM)	
ANALOG INPUTS	8 channels single-ended or 4 channels differential Programmable gain 1, 2, 4, 5, 8, 10, 16, and 20 V/V	
- A/D CONVERTER RESOLUTION	12 bits (11 bits single-ended)	
- A/D CONVERSION TIME (INCLUDING 120 MS RAW COUNT AND DYNAMIC C)	180 μs	
GENERAL-PURPOSE I/O	47 parallel digital I/O lines: <ul style="list-style-type: none"> • 41 configurable I/O • 3 fixed inputs • 3 fixed outputs 	
ADDITIONAL INPUTS	Startup mode (2), reset in, CONVERT	
ADDITIONAL OUTPUTS	Status, reset out, VREF	
AUXILIARY I/O BUS	Can be configured for 8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write	
SERIAL PORTS	5 shared high-speed, CMOS-compatible ports: <ul style="list-style-type: none"> • All 5 configurable as asynchronous, 3 as clocked serial (SPI), and 2 as SDLC/HDLC • 1 asynchronous serial port dedicated for programming • Support for MIR/SIR IrDA transceiver 	
SERIAL RATE	Maximum asynchronous baud rate = CLK/8	
SLAVE INTERFACE	A slave port allows the RCM3400 to be used as an intelligent peripheral device slaved to a master processor, which may either be another Rabbit 3000 or any other type of processor	
REAL-TIME CLOCK	Yes	
TIMERS	Ten 8-bit timers (6 cascadable), one 10-bit timer with 2 match registers	
WATCHDOG/SUPERVISOR	Yes	
PULSE-WIDTH MODULATORS	10-bit free-running counter and four pulse-width registers	
INPUT CAPTURE	2-channel input capture can be used to time input signals from various port pins	
QUADRATURE DECODER	2-channel quadrature decoder accepts inputs from external incremental encoder modules	
POWER	3.0–3.45 VDC @ 29.4 MHz, 2.8–3.45VDC @ 14.7 MHz 97 mA @ 3.3V, 29.4 MHz; 57 mA @ 3.0V, 14.7 MHz	
OPERATING TEMPERATURE	-40° C to +85° C	
HUMIDITY	5% to 95%, non-condensing	
CONNECTORS	Two 2 × 17, 1.27 mm pitch	
BOARD SIZE	1.160" × 1.375" × 0.31" (29.5 mm × 34.9 mm × 7.9 mm)	
PRODUCT WARRANTY	3 year	

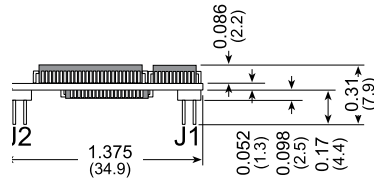

PART NUMBERS

DESCRIPTION

20-101-0561	RCM3400
20-101-0562	RCM3410

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001604
C4/319

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [System-On-Modules - SOM category](#):

Click to view products by [Digi International manufacturer](#):

Other Similar products are found below :

[COMX-CORE-310](#) [COMX-P4040-4G-ENP2](#) [PICOIMX6U10R1GBNI4G](#) [PICOIMX6U10R1GBNI4GBW](#) [RM-F6SO1-SMC](#) [MC27561-TIGER](#) [MC27561-LION](#) [AM335XBBLK-SYSTEM](#) [MC27561-FOX](#) [CC-WMX6UL-SMPL](#) [CB-52-PUS-110-SX](#) [BD63725BEFV-EVK-002](#) [A00150](#) [COMX_P4080](#) [A20-SOM-EVB](#) [RK3188-SOM](#) [RK3188-SOM-4GB](#) [PICOIMX6Q10R1GBNI4G](#) [PER-TAICX-A10-001](#) [PER-TAIX2-A10-2280](#) [EDL-mPCIe-MA2485](#) [SOM-5897C7-U0A1E](#) [SOM-5897C7-U8A1E](#) [SOM-6896C7-U2A1E](#) [Q7M311-N4200-4GB](#) [SCM180-Dual-2G_Industrial](#) [SCM180-Quad-4G-Industrial](#) [3354-HX-X38-RC](#) [5728-PJ-4AA-RC](#) [6455-JE-3X5-RC](#) [ET876-X7LV](#) [IFC6301-10-P2](#) [IFC6502-00-P1](#) [IFC67A1-00-P1](#) [iW-G27M-SCQM-4L008G-E032G-BIG](#) [iW-G33M-SCMQ-4L002G-E008G-BII](#) [CS-DEPTHAI-04](#) [MYC-C8MMQ6-8E2D-180-C](#) [MYC-Y7Z020-4E512D-766-I](#) [MYD-C4378-4E512D-100-I](#) [MOD5213-100IR](#) [MODM7AE70-100IR](#) [A20-SOM204-1GS16ME16G-MC](#) [AM3352-SOM-EVB](#) [BS2-IC](#) [102110278](#) [SLS16Y2_792C_256R_256N_0SF_I](#) [SLS12RT52_528C_0R_4QSPI_0SF_I](#) [SLS12RT52_528C_32R_16QSPI_0SF_I](#) [SLS12RT62_528C_0R_4QSPI_0SF_I](#)