



MICROPROCESSOR
CORE MODULE



RABBITCORE® RCM3209 SERIES

Ideal for engineers who want to rapidly develop and implement embedded systems with optional 10/100Base-T Ethernet connectivity

Based on the Rabbit® 3000, the RabbitCore RCM3209 series provides the capability to integrate real-time control and Ethernet connectivity into your design. Engineers are freed from the limitations of serial port communications, allowing worldwide connectivity using low-cost networking hardware. The RCM3209 series replaces the previous RCM3200 versions as it adds the full industrial temperature spec.


The RCM3209 series and Dynamic C® are designed in a complementary fashion for maximum performance and ease-of-use. Rabbit's industry-proven Dynamic C is a C language

environment that includes an editor, compiler and in-circuit debugger; no in-circuit emulator is required. An extensive library of drivers, sample programs and royalty-free TCP/IP stack with source code is included.

BENEFITS

- Rabbit 3000 microprocessor at 44 MHz
- Optional 10/100Base-T Ethernet
- 512K Flash / 256K SRAM / 512K Program Execution SRAM
- 52 digital I/O and 6 serial ports for multiple device connectivity options
- Software debugging directly on target hardware

APPLICATION EXAMPLE

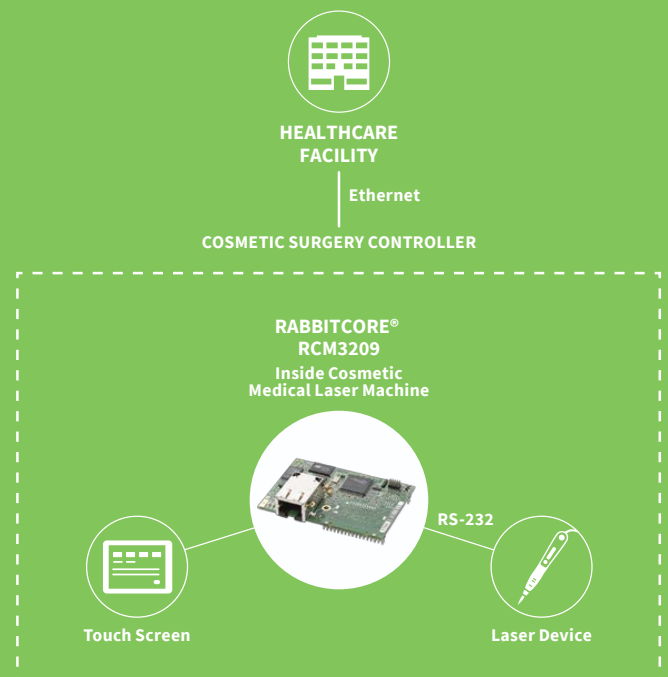

RELATED PRODUCTS



RabbitCore®
RCM3000
Series



RabbitCore®
RCM3700
Series



RabbitCore®
RCM4300
Series



Dynamic C®



ConnectCore®
9P 9215


SPECIFICATIONS

RCM3209

RCM3229

FEATURE

MICROPROCESSOR	Rabbit® 3000 at 44 MHz	
EMI REDUCTION	Spectrum spreader for reduced EMI (radiated emissions)	
ETHERNET PORT	10/100Base-T, RJ-45, 3 LEDs	N/A
FLASH MEMORY	512K	
DATA SRAM	256K	
PROGRAM EXECUTION SRAM	512K	
BACKUP BATTERY	Connection for user-supplied backup battery (to support RTC and data SRAM)	
GENERAL-PURPOSE I/O	52 parallel digital I/O lines: <ul style="list-style-type: none"> • 44 configurable I/O • 4 fixed inputs • 4 fixed outputs 	
ADDITIONAL INPUTS	Startup mode (2), reset in	
ADDITIONAL OUTPUTS	Status, reset out	
EXTERNAL I/O BUS	Can be configured for 8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write	
SERIAL PORTS	6 shared high-speed, CMOS-compatible ports: <ul style="list-style-type: none"> • All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC (with IrDA) • 1 asynchronous serial port dedicated for programming • Support for MIR/SIR IrDA transceiver 	
SERIAL RATE	Maximum asynchronous baud rate = CLK/8	
SLAVE INTERFACE	A slave port allows the RCM3209/RCM3229 to be used as an intelligent peripheral device slaved to a master processor, which may either be another Rabbit 3000 or any other type of processor	
REAL-TIME CLOCK	Yes	
TIMERS	Ten 8-bit timers (6 cascadable), one 10-bit timer with 2 match registers	
WATCHDOG/SUPERVISOR	Yes	
PULSE-WIDTH MODULATORS	10-bit free-running counter and four pulse-width registers	
INPUT CAPTURE	2- channel input capture can be used to time input signals from various port pins	
POWER	3.15V to 3.45 VDC 325 mA @ 3.3V	3.15V to 3.45VDC 190 mA @ 3.3V
QUADRATURE DECODER	Edge connectors for interface with 52-pin mini PCI Express socket	
OPERATING TEMPERATURE	-40° C to +85° C	
HUMIDITY	5% to 95%, non-condensing	
CONNECTORS	Two 2 × 17, 2 mm pitch	
BOARD SIZE	1.850" × 2.725" × 0.86" (47 mm × 69 mm × 22 mm)	

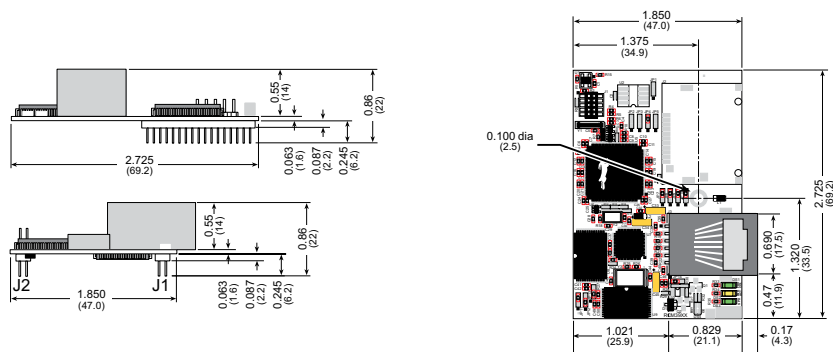

PART NUMBERS

DESCRIPTION

20-101-1179	RCM3209
20-101-1217	RCM3229
101-0552	RCM3209 Development Kit Universal

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001586
B1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [System-On-Modules - SOM category](#):

Click to view products by [Digi International manufacturer](#):

Other Similar products are found below :

[PICOIMX6S10R512NI4GBW](#) [20-101-1067](#) [20-101-1068](#) [PICOIMX6S10R512SD](#) [COMX-CORE-310](#) [CC-9P-V513-C](#) [Nit6Q_2GB](#) [COMX-P4040-4G-ENP2](#) [PICOIMX6U10R1GBNI4G](#) [PICOIMX6U10R1GBNI4GBW](#) [SOM-5897C7-U8A1E](#) [SOM-5897C7-U0A1E](#) [Nit6D_SOM_v2](#) [20-101-0079](#) [RM-F6SO1-SMC](#) [SOM-RK3399-Q7-2.1-I-4096M-32G-CAN](#) [MC27561-TIGER](#) [MC27561-LION](#) [AM335XBBLK-SYSTEM](#) [BD63715AEFV-EVK-001](#) [MC27561-FOX](#) [CC-WMX6UL-SMPL](#) [CB-52-PUS-110-SX](#) [BD63725BEFV-EVK-002](#) [BD63521EFV-EVK-001](#) [BD63525AEFV-EVK-001](#) [BD63511EFV-EVK-001](#) [BD63725BEFV-EVK-001](#) [EDI1.SPON.AL.S 937637](#) [SOM-6898C3Z2-U4A1E](#) [MYD-C4378-4E512D-100-I](#) [Q7M311-N4200-4GB](#) [PICOIMX8MMQ18R40E16](#) [A00150](#) [TE0745-02-81C11-A](#) [TE0714-03-35-2I](#) [TE0791-01](#) [00151100](#) [100-1215-1](#) [EIC-Q410-200](#) [COMX_P4080](#) [CC-ACC-LCDW-10](#) [20-101-0081](#) [151-0096](#) [SIP-005AYS001](#) [BS2P24](#) [BS2P40](#) [BS2PE](#) [RK3188-SOM](#) [RK3188-SOM-4GB](#)