




ULTRA-COMPACT
WI-FI MODULE

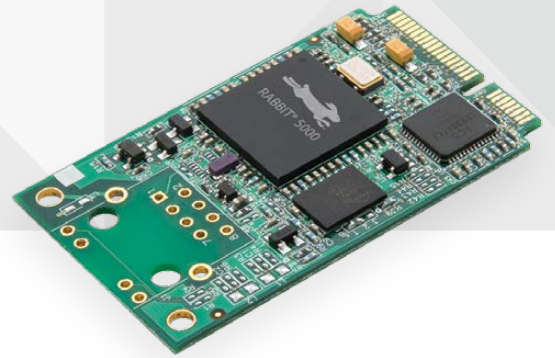

MINICORE[®] RCM5700 SERIES

A low-cost, ultra-compact, pin-compatible Ethernet control and communications solution for your embedded design

The MiniCore RCM5700 series offers an integrated software and hardware platform that can shorten your design cycle from years to months. RCM5750 and RCM5760 allow datalogging capabilities with increased memory options.

With six serial ports, four configurable as SPI, the RCM5700 series can easily embed into any existing or new design and is pin-compatible with current and future MiniCore products,

such as MiniCores offering Wi-Fi 802.11b/g. The embedded web server offers an added level of control and monitoring for today's intensive applications.

BENEFITS

- 10/100Base-T Ethernet
- Up to 640 KB SRAM for data, 1 MB Flash memory for program storage, 2 MB serial Flash for mass storage
- Up to 32 GPIO lines and 6 serial ports
- Serial to Ethernet bridge
- Embedded web server, Remote Firmware Update, open source code and royalty-free
- Cost-competitive embedded solution
- Quick time-to-market

RELATED PRODUCTS



Rabbit MiniCore[®] RCM6700



Rabbit MiniCore[®] RCM6600W



RabbitCore[®] RCM3000 Series



Dynamic C[®]



ConnectCard[™] for i.MX28

APPLICATION EXAMPLE



REMOTE SERVER


Ethernet



CONCENTRATOR BOX WITH RCM5700 INSIDE

STORE AUTOMATION

MINICORE[®] RCM5700



RS-485



Air Conditioning

RS-232



Lighting Control



RS-232



Refrigeration

SPECIFICATIONS	RCM5700	RCM5710	RCM5750	RCM5760
----------------	---------	---------	---------	---------

FEATURES				
MICROPROCESSOR	Rabbit® 5000 at 50 MHz			
EMI REDUCTION	10/100Base-T (Ethernet signals only)	10/100Base-T w/RJ-45 connector	10/100Base-T (Ethernet signals only)	10/100Base-T w/RJ-45 connector
FLASH MEMORY (CODE)	1 MB parallel Flash			
SRAM (DATA)	128K internal to Rabbit 5000		128K internal to Rabbit 5000; 512K external Fast SRAM	
BATTERY BACKABLE SRAM (DATA)	None			
MASS STORAGE OPTION	None		2 MB serial Flash	
BACKUP BATTERY	Connection for user-supplied backup battery (to be used for RTC)		None	
GENERAL PURPOSE I/O	Up to 32 parallel digital I/O			
SERIAL PORTS	6 high-speed, CMOS-compatible ports: • All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC • 1 asynchronous clocked serial port shared with programming port			
SERIAL RATE	Max. async = CLK/8, Max. sync = CLK/2			
SLAVE INTERFACE	Slave port allows the RCM5700 to be used as an intelligent peripheral device slaved to a master processor			
REAL-TIME CLOCK	Yes		Yes (no battery backup)	
TIMERS	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers			
WATCHDOG/SUPERVISOR	Yes			
PULSE-WIDTH MODULATORS	4 channels synchronized PWM with 10-bit counter 4 channels variable-phase or synchronized PWM with 16-bit counter			
POWER	3.15 - 3.45 VDC 70 mA @ 3.3V (typical — without Ethernet) 200 mA @ 3.3V (typical — with Ethernet)			
OPERATING TEMPERATURE	-40° C to +85° C			
HUMIDITY	5% to 95%, noncondensing			
CONNECTORS	Edge connectors for 52-pin Mini PCI Express socket	Edge connectors for 52-pin Mini PCI Express socket RJ-45 (Ethernet)	Edge connectors for 52-pin Mini PCI Express socket	Edge connectors for 52-pin Mini PCI Express socket, RJ-45 (Ethernet)
BOARD SIZE	1.20" × 2.00" × 0.12" (30 mm × 51 mm × 3mm)			

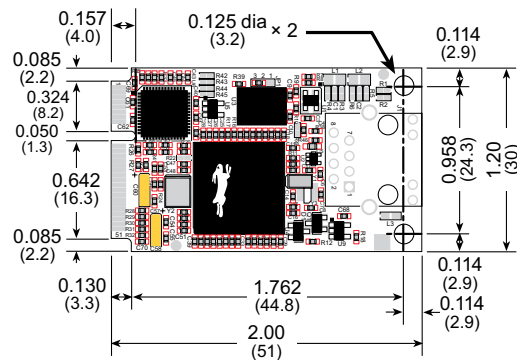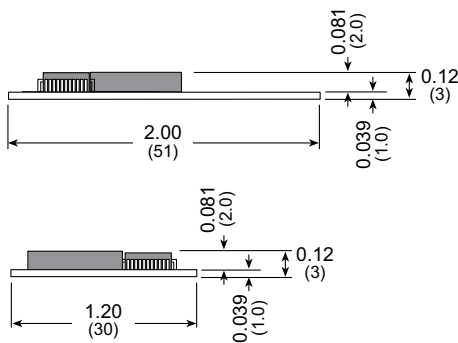

PART NUMBERS	DESCRIPTION
20-101-1235	RCM5700
20-101-1300	RCM5710
20-101-1306	RCM5750
20-101-1307	RCM5760

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001511
D1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digi International](#) manufacturer:

Other Similar products are found below :

[0.70001777](#) [1002-CMF4-OUS](#) [1002-CMG4-GLB](#) [101-1218](#) [101-1272](#) [101-1326](#) [151-0096](#) [170012](#) [20-101-0081](#) [20-101-0357](#) [20-101-0383](#)
[20-101-0390](#) [20-101-0404](#) [20-101-0405](#) [20-101-0430](#) [20-101-0431](#) [20-101-0434](#) [20-101-0436](#) [20-101-0444](#) [20-101-0454](#) [20-101-0488](#) [20-](#)
[101-0502](#) [20-101-0507](#) [20-101-0508](#) [20-101-0513](#) [20-101-0517](#) [20-101-0518](#) [20-101-0520](#) [20-101-0522](#) [20-101-0535](#) [20-101-0536](#) [20-101-](#)
[0541](#) [20-101-0542](#) [20-101-0561](#) [20-101-0569](#) [20-101-0575](#) [20-101-0602](#) [20-101-0612](#) [20-101-0654](#) [20-101-0672](#) [20-101-0673](#) [20-101-0688](#)
[20-101-0879](#) [20-101-0891](#) [20-101-0955](#) [20-101-1028](#) [20-101-1051](#) [20-101-1067](#) [20-101-1068](#) [20-101-1094](#)