



FAMILY OF REMOTE
USB HUBS



ANYWHEREUSB PLUS

Connect USB peripheral devices anywhere on a Local Area Network (LAN) without a locally-attached host computer

IoT business automation requires communication with various IT assets and peripherals located across an enterprise. AnywhereUSB® Plus remote USB hubs give users the simplest and most direct connection options for existing equipment with a variety of USB 3.1 Gen 1 port options. All three models have Gigabit Ethernet support for failover redundancy and network bonding with SFP+ ports in the 8 and 24-port models for higher speeds or fiber networks.

AnywhereUSB 24 Plus is rack mountable with 24 USB 3.1 Gen 1 ports, while AnywhereUSB 8 Plus and AnywhereUSB 2 Plus are desktop or panel mountable units with eight or two ports, respectively, and support for Gigabit Ethernet.

AnywhereUSB can be coupled with Digi Remote Manager®, a web-based device configuration and security management platform, to help users reduce downtime. An intuitive user experience makes installation smooth and easy; with quick setup and configuration to monitor and maintain larger installations of remote Digi and third-party devices.

For enterprise and industrial customers who need remote or local USB ports and the higher speeds of USB 3.1 Gen 1 and Gigabit/10 Gigabit Ethernet, Digi AnywhereUSB Plus products give you an industry-leading connectivity solution.


FEATURES AND BENEFITS

- Network-attached USB hubs easily connect USB peripheral devices to a PC from remote or virtual hosts
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB 24 Plus is rack mountable with two power supplies and Ethernet connections for failover redundancy
- Access and monitor USB and serial devices over TCP/IP connection
- Supports multi-host connectivity for each USB port or group independently
- Supports Digi Remote Manager® cloud-based management platform to deploy, monitor and manage devices

RELATED PRODUCTS



APPLICATION EXAMPLE

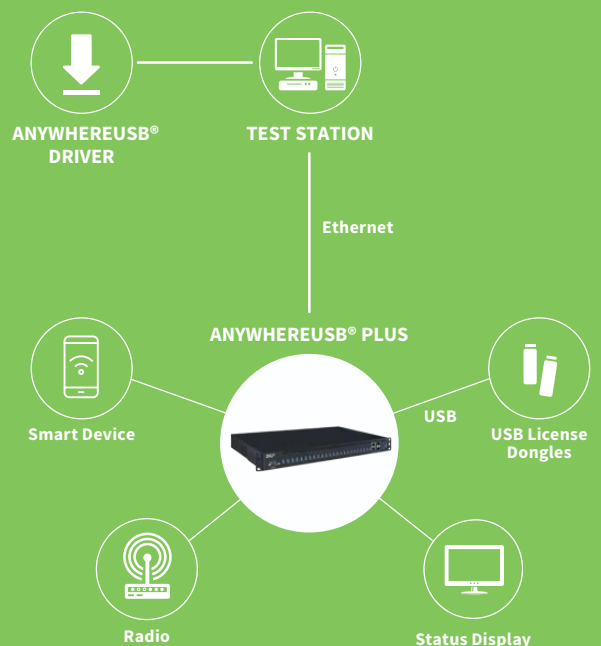


SPECIFICATIONS	ANYWHEREUSB 2 PLUS	ANYWHEREUSB 8 PLUS	ANYWHEREUSB 24 PLUS
CELLULAR			
MODULE SUPPORT	-	(1) Digi CORE modem compliant socket	(1) Digi CORE modem compliant socket
SOFTWARE AND MANAGEMENT			
REMOTE MANAGEMENT	Digi Remote Manager® (cloud based)		
LOCAL MANAGEMENT	WebUI (HTTP/HTTPS); CLI (SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)
OPERATING SYSTEMS	Windows 7, Windows 8.1, Windows 10, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019		
PROTOCOLS	Supports multi-host connectivity for each USB port or group independently		
MEMORY	512MB RAM, 4GB flash (eMMC)	2GB RAM, 4GB flash (eMMC)	2GB RAM, 4GB flash (eMMC)
NETWORK			
ETHERNET	(1) RJ-45; 10/100/1000 Mbps	(1) RJ-45; 10M/100M/1G/10G Ethernet	(2) RJ-45; 10M/100M/1G/10G Ethernet
SFP+	-	(1) SFP+ socket	(2) SFP+ sockets
CONNECTORS			
CONSOLE	-	(1) DB09M; RS-232 DTE	
USB	(2) USB 3.1 Gen 1 Type A	(8) USB 3.1 Gen 1 Type A	(24) USB 3.1 Gen 1 Type A
PHYSICAL			
DIMENSIONS (L X W X H)	118 mm x 74 mm x 30 mm (4.6 in x 2.9 in x 1.2 in)	260mm x 160 mm x 44.45 mm (10 in x 6 in x 1.75 in)	450.85 mm x 255 mm x 44.45 mm (17.75 in x 10 in x 1.75 in)
WEIGHT	0.38 kg (0.84 lb)	1.58 kg (3.48 lb)	4.7 kg (10.36 lb)
STATUS LEDS	(2) Ethernet, 2 (x1) USB, power	(2) Ethernet, (2) SFP+ 8 (x1)USB, power, fan, user, (3) future Wi-Fi/WWAN	2 (x2) Ethernet, 2 (x2) SFP+, 24 (x1) USB, 2 (x1)PSU, 2 (x1) fan, user, (3) future Wi-Fi/WWAN
POWER REQUIREMENTS			
POWER INPUT	5 V, 5 A max	12 V DC, 12 A max	100-240 V 3 A max (2 supplies for redundancy)
POWER CONSUMPTION	25 watts max	98.5 watts max	157.7 watts max
ENVIRONMENTAL			
OPERATING TEMPERATURE	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 55 °C (32 °F to 131 °F)	0 °C to 55 °C (32 °F to 131 °F)
RELATIVE HUMIDITY	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
APPROVALS			
BLUETOOTH	-	Bluetooth BLE 4.2	
SAFETY	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368	UL/EN60950, UL/EN62368 and CSA 22.2	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032
WARRANTY			
PRODUCT WARRANTY	5-year		


ENTERPRISE SOFTWARE	DESCRIPTION
PROTOCOL SUPPORT	HTTPS, FTP, SFTP, SSL, SMTP, SSH and CLI for web management; remote management via Digi Remote Manager
SECURITY/VPN	TLS 1.2, SSH, HTTPS
ROUTING/FAILOVER	Ethernet bonding (only for AnywhereUSB 24 Plus)
OTHER PROTOCOLS	DHCP

PRODUCT IMAGES


ANYWHEREUSB 2 PLUS FRONT

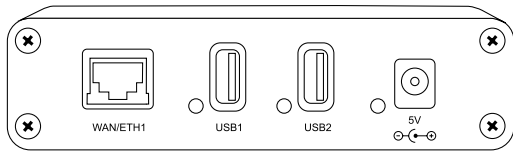


ANYWHEREUSB 2 PLUS BACK

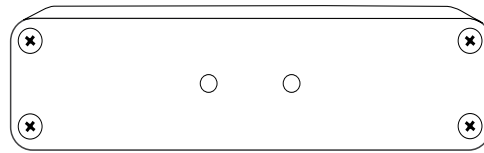


ANYWHEREUSB 8 PLUS FRONT

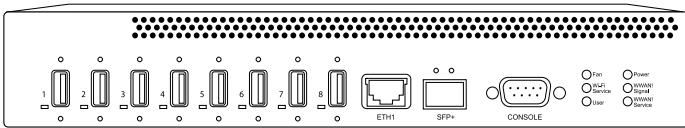


ANYWHEREUSB 8 PLUS BACK

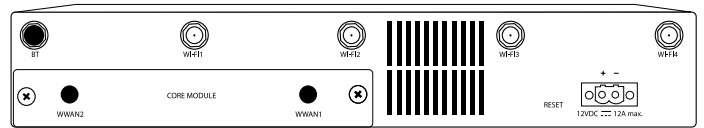

ANYWHEREUSB 24 PLUS FRONT



ANYWHEREUSB 24 PLUS BACK



PART NUMBERS	DESCRIPTION
ANYWHEREUSB 2 PLUS MODEL	
AW02-G300	AnywhereUSB 2 Plus; dual USB 3.1 Gen 1 ports, single 10M/100M/1G Ethernet, 5 VDC
ANYWHEREUSB 8 PLUS MODEL	
AW08-G300	AnywhereUSB 8 Plus; eight USB 3.1 Gen 1 ports, single 10M/100M/1G/10G Ethernet, single SFP+, 12 VDC
ANYWHEREUSB 24 PLUS MODEL	
AW24-G300	AnywhereUSB 24 Plus; 24 USB 3.1 Gen 1 ports, dual 10M/100M/1G/10G Ethernet, dual SFP+, dual power 100-240 VAC

ACCESSORIES	DESCRIPTION
76000965	AC power supply - extd temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug
76000682	Mounting bracket - DIN rail mounting kit

FOR MORE INFORMATION
PLEASE VISIT Digi.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004384
A11/919

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:

Click to view products by [Digi International](#) manufacturer:

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [17-200261](#) [AC102012-1](#) [AC102012-2](#) [FTP-629Y601](#) [45-1345-15](#) [45-1358-15](#) [45-1363-15](#) [IP-USB1\(C10\)S-RW](#) [CABLE/RTP/USB/DT](#) [45-1351-15](#) [45-1357-15](#) [45-1433-1](#) [687680278](#)
[USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [USBFTV2SA2N05A](#) [MDM9PH004B](#) [MDM9PH004P](#) [FTP-629Y401](#) [FTP-628Y302](#) [FTP-628Y402](#) [CSMNB9MF-5](#) [FNY-W6022](#) [UA-30AMF-SD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [UES-1001A160](#) [UES-1003A160](#)
[USBFTVX7SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F*2 to 2.54 2*5P-SH L=400mm](#) [68784-0075](#)
[USB-29](#) [19800-010500-200-RS](#) [103-1092-BL-F0050](#) [103-1020-BL-00100](#) [103-1092-BL-F0200](#) [103-1092-BL-F0100](#) [105-1092-BL-00300](#)
[105-1092-BL-00200](#) [105-1031-BL-00200](#)